


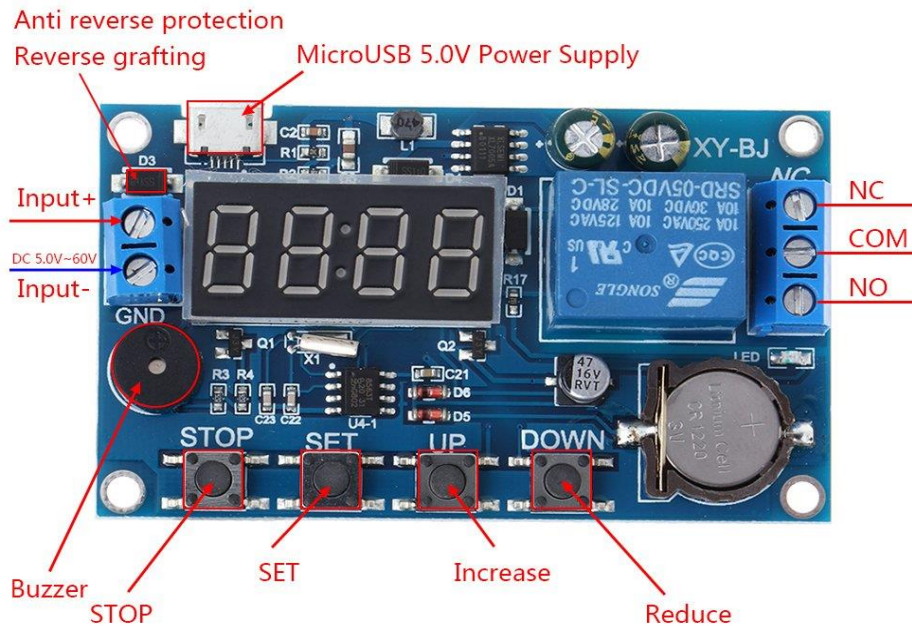

Product description

Mode introduction:

OPE: relay closing time point, CLE: relay off time point

Time period: PE-1 ~ PE-5 5 time periods (OPE to CLE is a time period)

---: function shielding

P-1: The relay closes or outputs pulses every day to the OPE time point, and the relay turns off or outputs pulses to the CLE time point.

P-2: set the day, to the OPE time point when the relay closed or output pulse, to the CLE time point when the relay disconnect / or output pulse

P-3: set the date of the month, to the OPE time point when the relay closed or output pulse, to the CLE time point when the relay is off or output pulse

P-4: Set the date 1 to date 2, start every day at the OPE time point, end to the CLE time point, relay action or output pulse

P-5: As with P-4, only the month can not be set

STOP key function expansion:

Relay enable mode:

1. ON: enable relay on;
2. OFF: Do not turn on the relay, it is always off;

Press the STOP button on the time display interface to switch between ON and OFF, the current status will flash, and then return to the main interface. (This function is the emergency stop function, press once to close the closed relay)

After the relay is disabled, the product can be used as an alarm clock.

Sleep mode:

1. C-P sleep mode: within five minutes, without any operation, the digital tube automatically shut down the display, the program normal operation;
2. O-d normal mode: digital tube is always open display;

Press the STOP button for a while after 2 seconds to release, to achieve C-P and O-d state of the switch, the current state will flash, and then return to the main interface.