


TECHNICAL SPECIFICATIONS

Model	IBC15000B; 15A Battery Charger
Suitable Batteries	
Suitable Battery Voltages	12V & 24V & 12.8V
Suitable Battery-Types and Battery's Capacities	<p>12V & 24V Lead Acid Batteries, e.g. Wet, Gel, AGM and 12.8V 4-cells LiFePO₄. The charger is suitable to charge...</p> <ul style="list-style-type: none"> • 12 V : 50 - 400 Ah capacity • 24 V : 25 - 200 Ah capacity • 12.8V : 30 - 200 Ah capacity (4-cells LiFePO₄ Lithium batteries)
Electrical Values	
AC Input	220V – 240V ~ 50Hz; max. 2A
Power Consumption	120W
Charging Current	<p>15A for 12V battery 7.5A for 24V battery 5.0A for 13.6V Power Supply</p>
(Charging) Voltages	<p>Normal: 12.8 / 13.8 / 14.1 / 14.5V or 25.6 / 28.2 / 29.0VDC Cold/AGM: 12.8 / 14.1 / 14.7V or 25.6 / 28.2 / 29.4VDC AGM+ : 12.8 / 14.1 / 14.4 / 15.0V DC LiFePO₄: 12.8 / 13.8/ 14.1 / 14.5V DC 13.6V Power Supply: 13.6V DC</p>
Back Drain Current without AC Input	< 10mA
Other	
Protection class	IP65
Electrical Safeguards	Protection against: overheat, short-circuit, reverse polarity
Operating ambient temperature	0°C ~ 40°C
Ambient Storage Temperature	-30 °C ~ 60 °C

This model may be operated in EU countries.

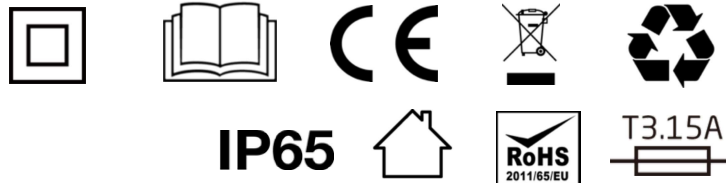

ENVIRONMENTAL PROTECTION



The product is classed as Electrical or Electronic Equipment and should not be disposed of with other household or commercial waste at the end of its working life. Please recycle where facilities exist. Ask your local authority or retailer for recycling advice.

WARRANTY

Pro-User warrants this product for a period of 24 months from the date of purchase to the original purchaser. Warranty is not transferable. Warranty covers defect against workmanship and materials only. To obtain warranty service, please return the unit to the place of purchase or authorized Pro-User dealer together with your proof of purchase. The warranty is void if the product has been damaged or not used as described in this manual. Warranty is void if a non-authorized repair has been performed. Pro-User makes no other warranty expressed or implied. Pro-User is only responsible for repair or replacement (at Pro-Users' Discretion) of the defective product and is not responsible for any consequential damage or inconvenience caused by the defect.