
## **ALCOR - I**






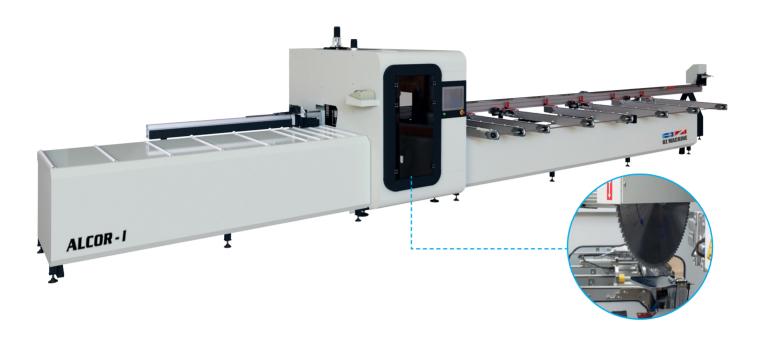


The 5 servo axis CNC profile cutting center **ALCOR - I** is designed to cut profiles made of aluminum, PVC and all kinds of light alloy profiles.

The cutting unit with a 550 mm diameter saw blade for cutting at every angle between 30° and 150° offers a wide cutting range to users.

Thanks to the feeding capacity of 10 profiles, the conveyor structure enables batch processing, letting the machine to be used in the most efficient manner.

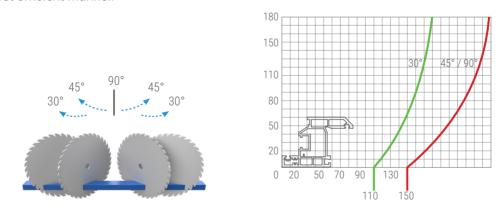

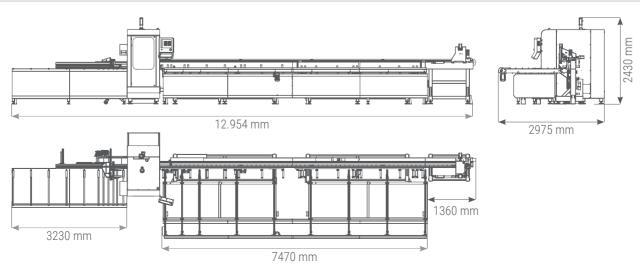



## **ALCOR - I**

CNC Profile Cutting Center (3 Axis)

AX	ıc	TD	Λ1	/61
$\mathbf{A} \mathbf{A}$	-	10	A	<i>1</i> E L

TZ Axis (Cutting unit vertical movement)	260 mm
TA Axis (Cutting unit rotation)	120°
SR Axis (Drive robot)	min. 700 mm / max. 7500 mm
POSITIONING SPEED	
TZ Axis (Cutting unit vertical movement)	32 m/min
TA Axis (Cutting unit rotation)	120°/sec
SR Axis (Drive robot)	110 m/min
ELECTRICAL	
Max. Power	6.75 kW
Voltage	400V 3N PE AC
Frequency	50-60 Hz
CUTTING UNIT	
Cutting angles span	30° / 150°
Saw blade diameter	550 mm
Saw blade motor power	3kW - 4HP
LOADING AND UNLOADING UNIT	
Minimum profile loading length	700 mm
Maximum profile loading length	7500 mm
Minimum profile unloading length (90° - 90° / 45° - 45°)	300 mm / 350 mm
Profile loading capacity	10
Automatic chip discharge conveyor unit	•
GRIPPER AXIS TRAVEL	
GrY Axis (Lateral) min. / max.	20 mm / 130 mm
GrZ Axis (Vertical) min. / max.	20 mm / 135 mm
CONTROL UNIT	
Industrial PC - Touch Screen	15"
LS automation package	•
Oz Machine Softcut	•
Data transfer over remote network connection, Ethernet and USB	•

• Standard o Optional

Özçelik Makina continuously improves its products and offers new and modern solutions for PVC and Aluminum Profile Processing. Accordingly, Özçelik reserves the right to change the information in this document without notice. All dimensions and weights are reference values. Valid from January 2023

Barcode writer

FANUC automation package

**OPERATIONAL AREA** 

Guard cabin for cutting area FESTO pneumatic system

Automatic lubrication in processing area

Compatible with optimized cutting and machining list data