
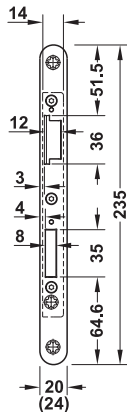


Mortise lock Häfele Häfele/BKS Panic function D for 1-leaf doors

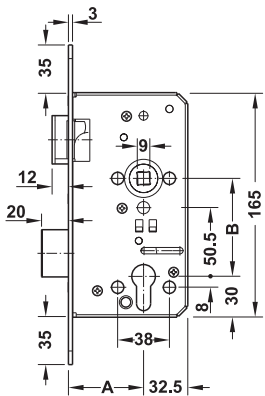

- > For door type: Escape and panic doors, Emergency exit doors, Fire resistant and smoke control doors
- > For number of doors: 1-leaf doors
- > For door material: Wood, Steel
- > Opening direction: Inwards or outwards
- > Prepared for: Profile cylinder
- > Functionality: Without key action
- > Panic lock function: Panic gateway function D
- > Material: Forend: Stainless steel, Latchbolt and deadbolt: Steel, Lock case: Steel
- > Colour/finish: Forend: Satin, Latchbolt and deadbolt: zinc plated, Lock case: zinc plated
- > Forend design: Flat forend rounded
- > Forend length: 235 mm
- > Distance: 72 mm
- > Deadbolt throw: 2 turns
- > Deadbolt throw dim.: 20 mm
- > Lever follower: 9 mm
- > Lever follower version: Split follower
- > Classification in compliance with EN 179: 

|   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|
| 3 | 7 | 7 | W | 1 | 3 | 4 | X | Y | Z |
|---|---|---|---|---|---|---|---|---|---|
- > Classification in compliance with EN 1125 with touchbar: 

|   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|
| 3 | 7 | 7 | B | 1 | 3 | 2 | 1 | A | B |
|---|---|---|---|---|---|---|---|---|---|
- > Classification in compliance with EN 1125 with push bar: 

|   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|
| 3 | 7 | 7 | B | 1 | 3 | 2 | 2 | B | B |
|---|---|---|---|---|---|---|---|---|---|

**Note**  
Forend width 20 mm for rebated doors  
Forend width 24 mm for flush doors

Area of application



Certified in compliance with EN 179:2008  
Certified in compliance with EN 1125:2012  
The EN 179:2008 and EN 1125:2012 standards are only met in conjunction with jointly tested fitting sets.

| Opening direction | Backset mm | Forend width mm | Mounting  | Cat. No.   |
|-------------------|------------|-----------------|-----------|------------|
| Outward           | 55         | 20              | DIN left  | 911.56.550 |
|                   |            |                 | DIN right | 911.56.551 |
|                   |            | 24              | DIN left  | 911.56.552 |
|                   |            |                 | DIN right | 911.56.553 |
| Inward            | 55         | 20              | DIN left  | 911.56.554 |
|                   |            |                 | DIN right | 911.56.555 |
|                   |            | 24              | DIN left  | 911.56.556 |
|                   |            |                 | DIN right | 911.56.557 |
| Outward           | 65         | 20              | DIN left  | 911.56.560 |
|                   |            |                 | DIN right | 911.56.561 |
|                   |            | 24              | DIN left  | 911.56.562 |
|                   |            |                 | DIN right | 911.56.563 |
| Inward            | 65         | 20              | DIN left  | 911.56.564 |
|                   |            |                 | DIN right | 911.56.565 |
|                   |            | 24              | DIN left  | 911.56.566 |
|                   |            |                 | DIN right | 911.56.567 |

