

PMi 3000




Caracteristici principale

Frecvență	Hz	50
Tensiune	V	230
Faze		1
Putere pasivă	watt	3000
Putere continuă	watt	2800



Motor		
Marca	Pramac	
Tip	OHV	
Emisii de eșapament optimizate	Stage V	
Viteză nominală de funcționare	rpm	Variable
Combustibil	Benzină	
Sistem de pornire	Pornire la sfoara	
Capacitate ulei	l	0.52
Protecție ulei	✓	

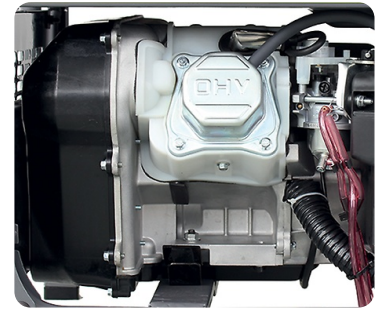

Alternator	
Sistem de regulare tensiune	Inverter

Date dimensionale		
Lungime	(L) mm	555
Lățime	(W) mm	400
Înălțime	(H) mm	450
Greutate fără combustibil	kg	38
Dimensiuni cutie carton lungime/lățime/înălțime	mm	585x415x465



Autonomia		
Capacitate rezervor combustibil		10
Consum combustibil la 50%	l/h	1.6
Timp de funcționare la 50%	h	6



Nivel zgomot		
Nivelul de zgomot garantat (LWA)	dBA	96

GENSET CONTROL

COMMANDS

- Selector switch: O/I
- Air choke Valve
- Starting handle
- Smart throttle: Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.

INSTRUMENTATION:

- Voltmeter, Frequency meter and Hourmeter (display)
- Outputting energy (indicator light - Green)
- Overloading and Oil alarming (indicators light - Red)

PROTECTIONS

- Overload
- Oil Guard

OUTPUT:

- DC12V 6A



PRIZE

SCHUKO 230V 16A IP44	2
----------------------	---

Informațiile sunt aliniate cu fișierul de date în momentul descărcării.
Imprimat pe 04/04/2025 (ID 10313)