Ampacoll® Profix


Liquid adhesive





- > Permanently elastic and tacky
- Ideal for TPU products and many other, sometimes tricky surfaces
- > Resistance against condensation and run-off water
- > No primer necessary
- > Repositionable
- Notched nozzle for a more even bead

Technical details	Value
Storage	frost-free, cool and dry
Working temperature	5 to + 35°C
Temperature resistance	-40 to +90°C
Ageing resistance	>20 years
Setting time	Two to three days
Solvents	solvent-free
Consumption	30-50 ml/m








Uses: Solvent-free, airtight, windtight, durable elastic liquid adhesive. Ideally suited for bonding TPU sheeting, connecting a membrane to the eaves flashing, bonding overlaps on façade sheeting, mounting façade sheeting on metal sections and connecting to building structures. The liquid adhesive sticks to many other, sometimes tricky surfaces such as PE, PP, EPDM, PVC, TPU and bitumen surfacing. It also levels off irregular surfaces on the building structure (bricks, stone, concrete, plaster, wood, MDF/OSB boards, etc.).

Delivery forms				
Article number	Description	Contents	Box contents	Pallet contents
7640442090417	Ampacoll® Profix	290 ml/cartridge	12 cartridges	130 boxes
7640442091193	Ampacoll® Profix	600 ml/tube	12 tubes	

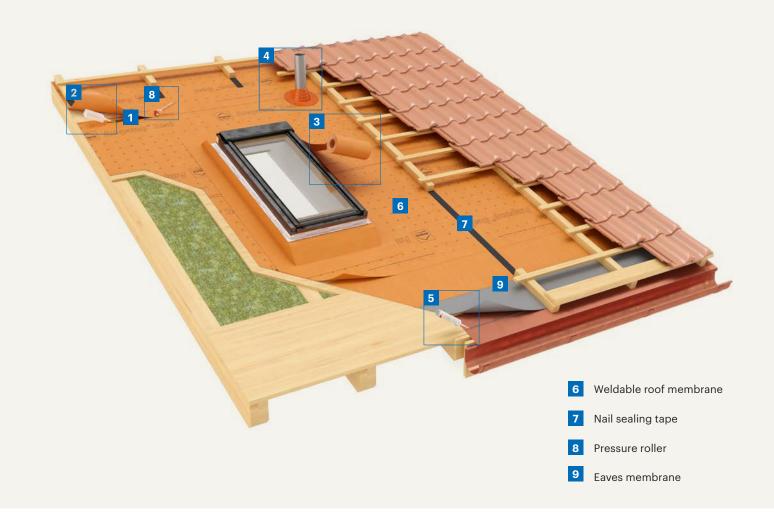













Note the application guidelines and other system products in our adhesive matrix.



For more detailed information and documents see www.ampack.biz

Sales through dealers

Ampack Switzerland: +41 (0)71 858 38 00 Ampack Austria: +43 (0)5523 53433 Ampack Germany: +49 (0)7621 1610264 Ampack France: +33 (0)4 50 83 70 54 Ampack Italy: +39 (0)471 053 475

