

# Ampatex® SB 130 (plus)

Formwork membrane, weather-resistant vapour check and airtight layer



- > Three months' weather resistance
- > Translucent – the substructure remains visible
- > Very robust and suitable for harsh site conditions
- > **Ampatex® SB 130 plus:** integrated tapes

Technical details		Value	Standard
Product description		Type A	EN 13984
Mass per unit area		135g/m <sup>2</sup>	EN 1849-2
s <sub>D</sub> -value		40m	EN 1931
Straightness		< 75mm/10m	EN 1848-2
Fire performance		E	EN 13 501-1
Waterproofing (at 2 kPa)		passed	EN 1928, procedure A
Tear resistance	longitudinal	220N/5cm	EN 12 311-2/
	transverse	220N/5cm	EN 13 859-1
Tear elongation	longitudinal	25%	EN 12 311-2/
	transverse	25%	EN 13 859-1
Resistance to further tearing (nail shaft)		230N	EN 12 310-1/
		210N	EN 13 859-1
Water vapour resistance after ageing		passed	EN 1296, EN 1931
Airtightness		airtight	
Hazardous substances		none	
Visible defects		none	EN 1850-2
Minimum roof slope		5°**	
Width of overlap		10cm	

\* Conditions for the twenty-year premium warranty include registering the building object and the Ampack products used. In addition, our products must be used as part of a system. For further details, please see our General Warranty Conditions.


\*\*Additional measures: In the case of roof pitches between 5° and 9° seal the overlap (15 cm) with **Ampacoll® Superfix** or **Ampacoll® Profix** (sealing function) and cover the overlap with **Ampacoll® XT 60 mm** or **Ampacoll® Flexx** (mechanical securing).

**Areas of application:** for internal and external pitched roofs, polished and unpolished timber frameworks, outside under the insulation.



Forms of delivery			
Article number	Description	Roll dimensions	Content of pallets
7640442090790	Ampatex® SB 130 plus integrated tapes	1,5m × 50m = 75m <sup>2</sup>	24 rolls = 1800m <sup>2</sup>
7640115535382	Ampatex® SB 130	3,0m × 50m = 150m <sup>2</sup>	40 rolls = 6000m <sup>2</sup>

## Warm roof, rafter-mounted insulation

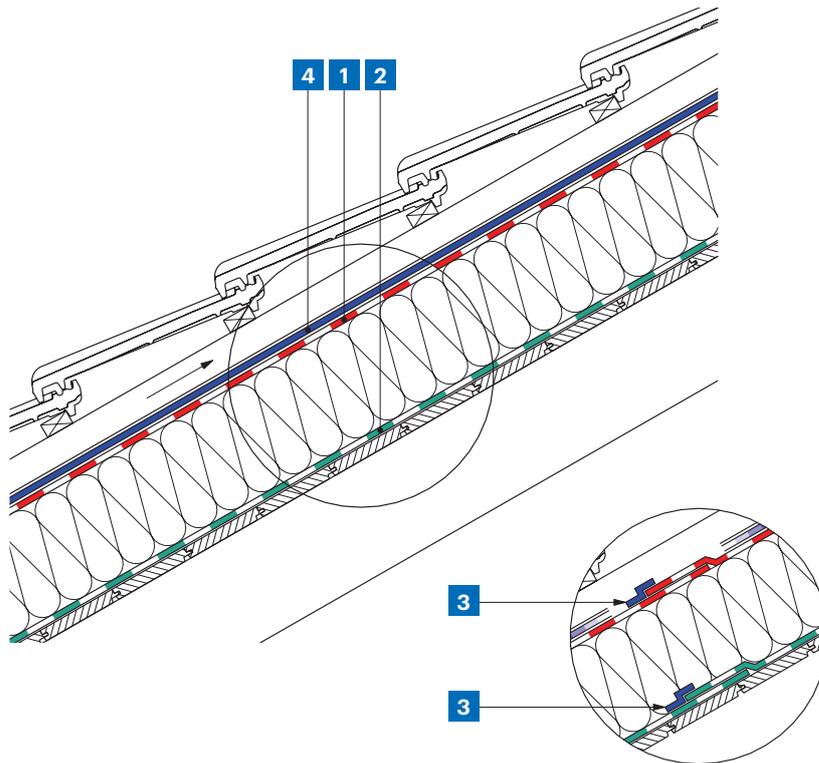

- 1** e.g. **Ampatop® Protecta**  
Roof membrane
- 2** **Ampatex® SB 130 (plus)**  
Formwork membrane



## Processing tips

**Ampatex® SB 130 (plus)** is a weather-resistant vapor check and airtight layer in one. All joints, gaps, overlaps, connections and openings must be made airtight. Any damage to the surface must be sealed.

**Ampatex® SB 130 (plus)** is usually used on the warm side of the insulation. The membrane runs parallel to the eaves on the existing two-dimensional substructure and the overlaps (10 cm) are fastened with concealed nails. The overlaps are glued with

the integrated tapes, **Ampacoll® Flex** or **Ampacoll® XT**. Flashing on chimneys, skylights, etc., must be bonded with **Ampacoll® Superfix** or **Ampacoll® Profix** at least 15 cm high. Penetrations such as outlet vents, chimneys, etc., should be taped with **Ampacoll® BK 535** butyl rubber tape, **50** or **80 mm**, to make them airtight and rainproof. Porous, dusty or rough surfaces should be pretreated with **Ampacoll® Primax** or **Airmax**.



Note the application guidelines and other system products in our adhesive matrix



For more detailed information and documents see [www.ampack.biz](http://www.ampack.biz)

Sales through dealers

Ampack Switzerland: +41 (0)71 858 38 00  
 Ampack Austria: +43 (0)5523 53433  
 Ampack Germania: +49 (0)7621 1610264  
 Ampack France: +33 (0)4 50 83 70 54  
 Ampack Italy: +39 (0)471 053 475

[www.ampack.biz](http://www.ampack.biz)



This data may become invalid as a result of new information or development.  
 Current information can be found at [www.ampack.eu](http://www.ampack.eu) © Ampack AG, Rorschach, 02.2021

4116EU/EX.YY(VS)0221