

OMEGA PLASTO Tape



THE LEADING ROLL




Perfect sealing for: CHIMNEY | BASE | WINDOW | PENETRATIONS



Water-tight



Flexible



Expandable



Can be plastered
over



High adhesion

ISOCELL

CHIMNEY | BASE | WINDOW | PENETRATIONS

DESCRIPTION

OMEGA PLASTO Tape is an expandable butyl-rubber tape with a fleece base that can be plastered and painted over. The adhesive area has a split, asymmetrical PE backing. The liner split enables precise application at intersections and in corner areas. Amongst other sealing applications, the adhesive tape is used to make a second drainage level below the window sill.


Thickness: 0.8 mm

Working temperature: from -5 °C





○ PENETRATIONS

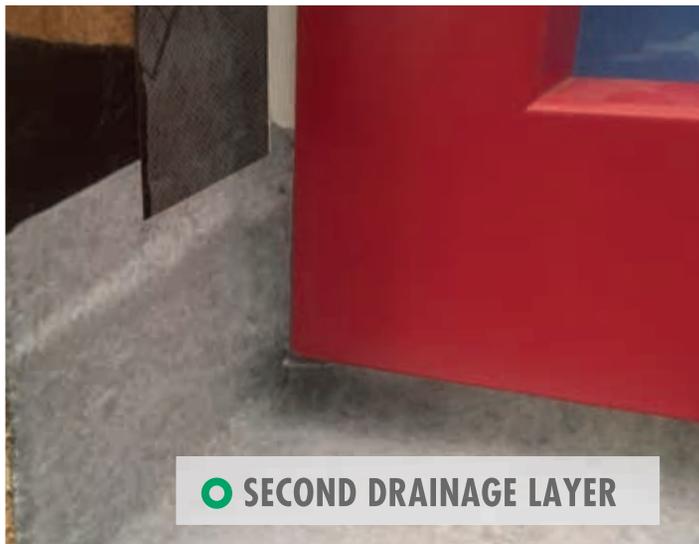

○ SECOND DRAINAGE LAYER



○ DOOR CONNECTION



OMEGA PLASTO Tape was tested in combination with OMEGA PoBit Sealing Compound for tightness against water accumulation according to the guideline for waterproofing of structural connections with floor-to-ceiling windows and doors, Part 2. Tested by HFA (Austrian Forest Products Research Society), HFA 2281/2019/G-BF.

OMEGA PLASTO Tape



03_2023


PRODUCT DATA

Material composition	Butyl-rubber adhesive tape combined with non woven fabric
Thickness	0.8 mm
Temperature resistance	- 40 °C - + 100 °C
Working temperature	- 5 °C - + 40 °C
UV-Resistance	4 months
Colour	Grey, with white fleece
Storage	2 years; cool and dry
Fire performance	E

DISPONIBIL ÎN URMĂTOARELE DIMENSIUNI

Roll width	Roll length	Liner split
75 mm	25 m	30 / 45
100 mm	25 m	30 / 70
160 mm	25 m	30 / 130
200 mm	25 m	30 / 170
250 mm	25 m	30 / 220
300 mm	20 m	30 / 120 / 150
450 mm	15 m	30 / 210 / 210

RECOMMENDED PRODUCTS

UNI XL Primer Spray / UNI SPRAY Primer Spray

To optimise the adhesion of adhesive tapes. Particularly characterised by its fast application.

Working temperature: from - 5°C



OMEGA PoBit Sealing Compound

A ready-to use one-component water-based elastic bitumen seal. OMEGA PoBit is particularly suitable for seamless sealing work at critical spots in the window and door areas, as second drainage layer below window sills, at penetration points and as sealant for bases outdoors.

Corresponds to ETAG 005
CE marking according to EN 15814

Working temperature: from + 5°C

Further accessories on request



INSTALLATION VIDEO

ISOCELL GmbH & Co KG

Gewerbestraße 9 | 5202 Neumarkt am Wallersee
Tel.: +43 6216 4108-0 | Fax: +43 6216 7979
E-Mail: office@isocell.at | WWW.ISOCELL.COM

ISOCELL