



Motor filled with water for selection



Motor filled with oil

Free Accessories



Heat shrinkable tube




Water level sensor




1.5m Cable with MC4 connector

- Pollution Recovery motors are equipped for use in monitoring and recovery wells in which hydrocarbons and other chemicals may be present
- Deep submerge depth till 300 meters
- Longer life time
- No leakage problem

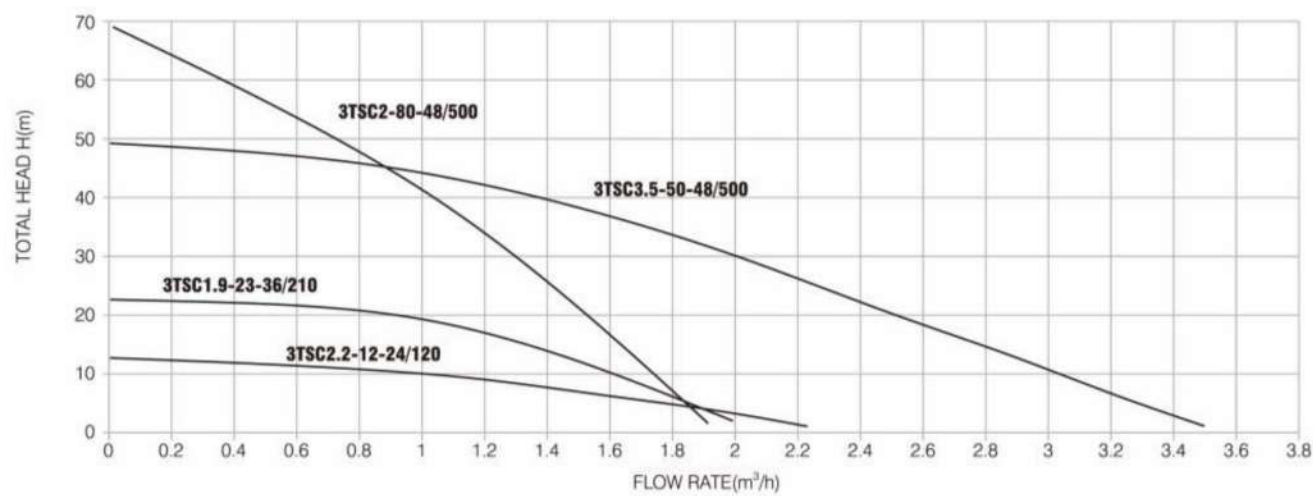

Performance Chart

Type	Q (m³/h)	0	0.4	0.8	1.2	1.6	2	2.4	2.8	3.2
3TSC2.2-12-24/120	H(m)	12	11	10	9	6	4			
3TSC1.9-23-36/210		23	22	21	17	10				
3TSC2-80-48/500		70	60	47	35	16				
3TSC3.5-50-48/500		50	48	46	42	37	30	22	15	7

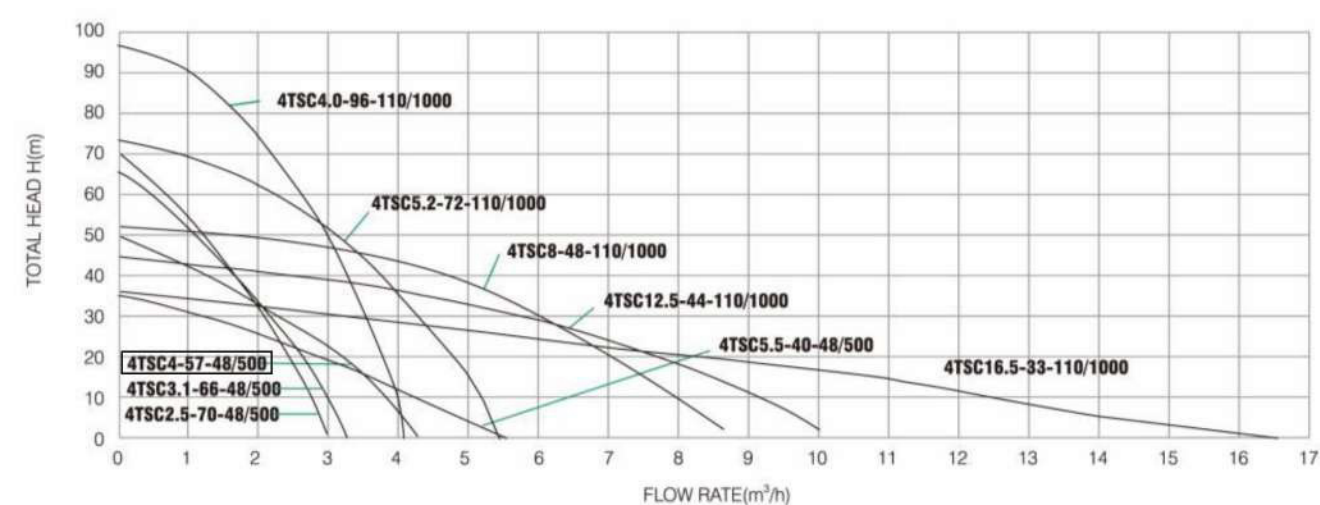

Performance Chart

Type	Q (m³/h)	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14
4TSC5.5-40-48/500	H(m)	35	33	28	23	16	9	2								
4TSC4-57-48/500		50	41	31	20	1										
4TSC3.1-66-48/500		60	48	30	2											
4TSC2.5-70-48/500		70	51	28												
4TSC4.0-96-110/1000		96	90	75	50	10										
4TSC5.2-72-110/1000		72	69	62	52	36	16									
4TSC8-48-110/1000		49	48	47	46	42	35	27	16	4						
4TSC12.5-44-110/1000		44	43	41	39	37	33	29	25	18	11	2				
4TSC16.5-33-110/1000		36	34	32	30	28	26	24	22	21	19	17	15	12	9	5

Pump Performance

Type	Voltage (v)	Power (w)	Max Flow Rate (m³/h)	Max Head (m)	Outlet Size (In)	Diameter (In)
3TSC2.2-12-24/120	24	120	2.2	12	1"	3"
3TSC1.9-23-36/210	36	210	1.9	23	1"	3"
3TSC2-80-48/500	48	500	2	70	1"	3"
3TSC3.5-50-48/500	48	500	3.5	50	1"	3"
4TSC5.5-40-48/500	48	500	5.5	35	1.25"	4"
4TSC4-57-48/500	48	500	4.0	50	1.25"	4"
4TSC3.1-66-48/500	48	500	3.1	66	1.25"	4"
4TSC2.5-70-48/500	48	500	2.5	70	1.25"	4"
4TSC4.0-96-110/1000	110	1000	4.0	96	1.25"	4"
4TSC5.2-72-110/1000	110	1000	5.2	72	1.25"	4"
4TSC8-48-110/1000	110	1000	8.0	48	2"	4"
4TSC12.5-44-110/1000	110	1000	12.5	44	2"	4"
4TSC16.5-33-110/1000	110	1000	16.5	36	2"	4"