

LED DOWNLIGHT

Product&Family Code:


016 048 0024

ALEXA-24


WHITE

BLACK


Technical Drawing



Technical Data

Voltage (V)	200-265V
Product Wattage (W)	24
Equivalence with incandescent lamp	192
Colour Render Index (Ra)	>Ra70
Colour Temperature (K)	3000K / 4200K / 7000K
Materials	Aluminium Die Casting Body
Protection Class	II
Dimmable	No
EEI	-
Warm-up time up to 60 % of the full light output	Instant Full Light
Luminous Flux (lm)	1800
Luminous Efficacy (lm/W)	75
Rated Life (hrs) ⌚	70.000
IP Rating	20
Power Factor	>0.5
Beam Angle	120°
Starting Time	<0.2s
Number of ON-OFF cycling	x35.000

Photometric Diagram

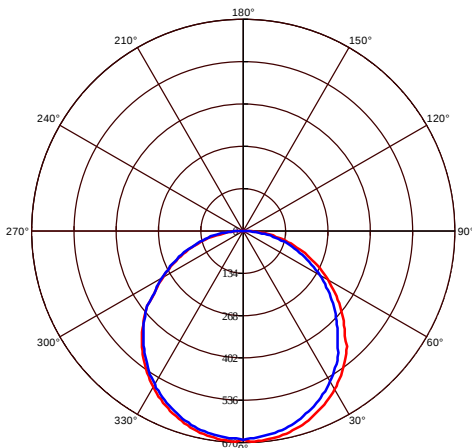

Applications

• Airport, Bathroom, Bedroom, Car Park, Cinema, Gallery, Hospital, Hotel, Kitchen, Museum etc.



Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.
- Aluminum Die Casting Body

