

TECHNICAL SPECIFICATIONS

Since the iron is mono block, it can be easily used by the operator. In order to prevent risks such as finger entrapment during use, safety precautions have been taken with a protection switch. Ironing belts are made of "Nomex" material resistant to 220°C high temperature. All controls are placed on the front of the machine and are easy to use. There is a clamshell section that protects the electrical and gas components. Thanks to its special design, it operates without noise and with minimum vibration level, providing low energy consumption and high efficiency. Safety thermostat against overheating. The carcass is painted with electrostatic powder paint. Thanks to its superior adhesion feature, it shows great resistance against corrosion, mechanical and chemical impacts, heat, weather conditions and provides quality coating. It has pressure rollers that provide excellent ironing quality. It provides faster ironing thanks to its extended heat transfer surface.

GENERAL FEATURE

Easy to use, manual control panel. Galvanized roller for better heat conduction. Two-way rotary belt system. Stainless steel hood adapted to the machine to collect moisture and steam. Quiet operation and superior ironing quality.

CONSTRUCTION FEATURES

Powder coated carcass and galvanized cylinder.

SAFETY EQUIPMENT &

APPROVALS

CE certification for all directives and regulations.


Center: Plevne Caddesi No.40/C Gülveren-Mamak /ANKARA +90 312 363 94 93 +90 312 363 94 92
Factory: Taşpınar Mahallesi Küme Evleri No:154 Çubuk / ANKARA +90 312 837 76 72 +90 312 837 73 38
www.vitalmutfak.com / info@vitalmutfak.com

PRODUCT CODE	VLRI60180G
DIMENSIONS	2550x1300x1700 mm
PACKAGE SIZES	2600x1350x1750 mm
WEIGHT	1.395 kg
PACKAGE WEIGHT	1.415 kg
TOTAL POWER	26 kW
CYLINDER DIMENSION	600x1800
MOTOR POWER	1,1 kW
ELECTRICAL VOLTAGE	380-400 VAC 3N 50 Hz
CABLE CROSS SECTION	5X1.5 mm^2
INJECTOR	NG (G20) 2.40 mm
	LPG (G30) 2.00 mm
GAS INLET	R 1/2
GAS COMSUMPTION	2.752 max. / 1.445 min G20(m^3/h)
	2.051 max. / 1.077 min. G30 (kg/h)


EI=ELECTRICAL CONNECTION

G=GAS INLET


FRONT

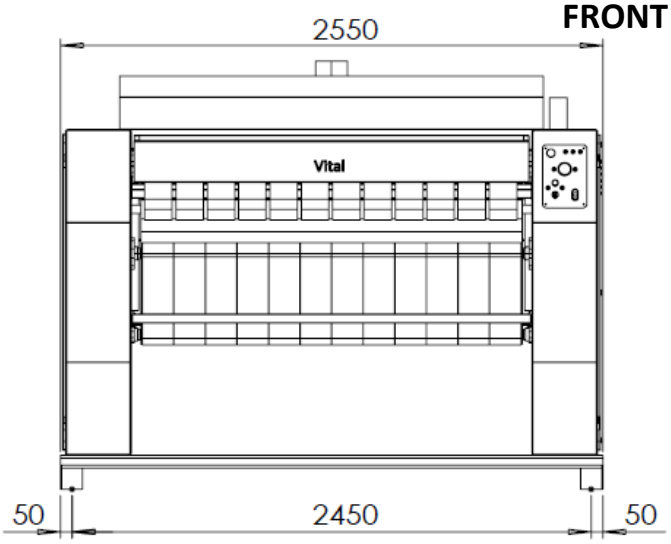

TOP

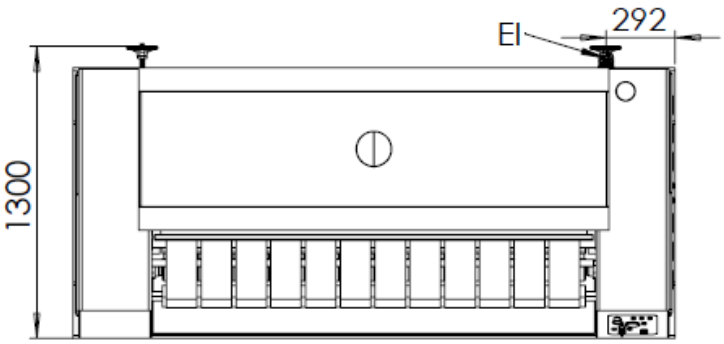

SIDE

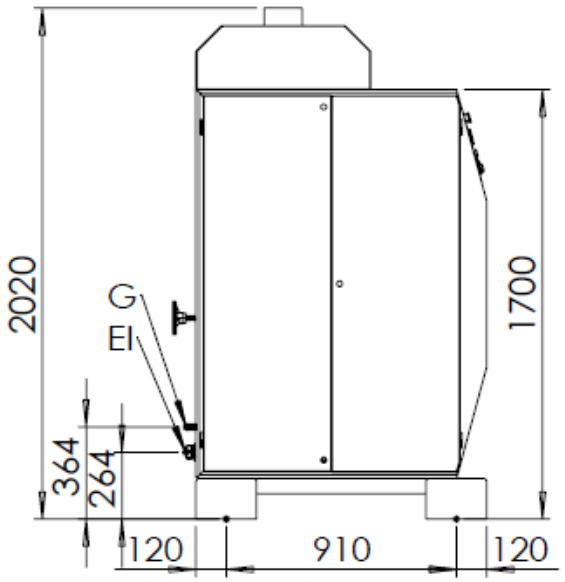

Center: Plevne Caddesi No.40/C Gülveren-Mamak /ANKARA +90 312 363 94 93 +90 312 363 94 92
Factory: Taşpınar Mahallesi Küme Evleri No:154 Çubuk / ANKARA +90 312 837 76 72 +90 312 837 73 38
www.vitalmutfak.com / info@vitalmutfak.com