

## DS-UC2 1080P Web Camera



- High quality imaging with 1920 × 1080 resolution
- Low distortion lens for reducing image distortion
- Built-in dual-microphone with clear sound
- USB Type-C interface, supporting USB 2.0 protocols
- Plug-and-play, no need to install driver software
- Support auto focus



## ▪ Specification

| Camera                   |                                                                                                                                                                                                                                  |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor             | 2 MP CMOS                                                                                                                                                                                                                        |
| Signal System            | PAL/NTSC                                                                                                                                                                                                                         |
| Frame Rate               | MJPG:<br>1920 × 1080 @ 30 fps/25 fps<br>1280 × 960 @ 30 fps/25 fps<br>1280 × 720 @ 30 fps/25 fps<br>640 × 480 @ 30 fps/25 fps<br>YUV2:<br>1920 × 1080 @ 5 fps<br>1280 × 960 @ 5 fps<br>1280 × 720 @ 10 fps<br>640 × 480 @ 30 fps |
| Resolution               | 1920 (H) × 1080 (V)                                                                                                                                                                                                              |
| Min. Illumination        | 0.1 Lux @ (F1.2, AGC ON)                                                                                                                                                                                                         |
| Shutter Time             | PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s                                                                                                                                                                            |
| Lens                     | 3.6 mm fixed focal lens                                                                                                                                                                                                          |
| Field of View            | horizontal FOV: 87°, vertical FOV: 55°, diagonal FOV: 95°                                                                                                                                                                        |
| Lens Mount               | M8                                                                                                                                                                                                                               |
| Day & Night              | 24/7 Color Imaging                                                                                                                                                                                                               |
| Angle Adjustment         | pan: 0° to 360°; tilt: 0° to 35°; rotation: 0°                                                                                                                                                                                   |
| Digital Zoom             | 1.5 ×                                                                                                                                                                                                                            |
| Cable Length             | 2 m                                                                                                                                                                                                                              |
| Depth of Field           | 0.1 m to ∞                                                                                                                                                                                                                       |
| Image                    |                                                                                                                                                                                                                                  |
| Wide Dynamic Range (WDR) | Digital WDR                                                                                                                                                                                                                      |
| White Balance            | Auto                                                                                                                                                                                                                             |
| Audio                    |                                                                                                                                                                                                                                  |
| Audio Sampling Rate      | 16 kHz                                                                                                                                                                                                                           |
| Interface                |                                                                                                                                                                                                                                  |
| Video Output             | USB 2.0                                                                                                                                                                                                                          |
| Operating System         | Windows XP/7/10, Android, Linux, MAC OS                                                                                                                                                                                          |
| Built-in Microphone      | 2 built-in microphones, picking up sounds in the radius up to 3 meters                                                                                                                                                           |
| Indicator                | White: Normally Working                                                                                                                                                                                                          |
| General                  |                                                                                                                                                                                                                                  |
| Operating Conditions     | -10°C to 40°C (-40°F to 104°F), Humidity: 90% or less (non-condensing)                                                                                                                                                           |
| Power Supply             | DC 5V ± 5% (USB)                                                                                                                                                                                                                 |
| Consumption              | 2.5 W MAX                                                                                                                                                                                                                        |
| Dimension                | 120 mm × 27.9 mm × 25.6 mm (4.72" × 1.10" × 1.01")                                                                                                                                                                               |
| Weight                   | Approx. 147 g (0.32 lb.)                                                                                                                                                                                                         |

## Accessory





### Packing List

Camera × 1  
 USB Cable × 1  
 Quick Start Guide × 1

## ▪ Available Model

DS-UC2

## ▪ Dimension

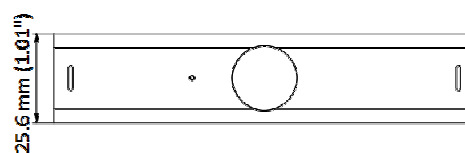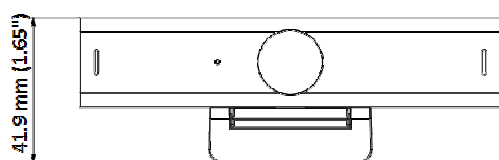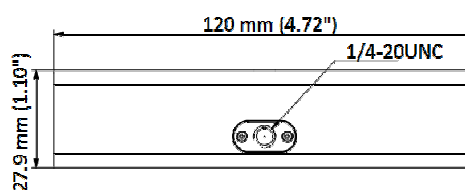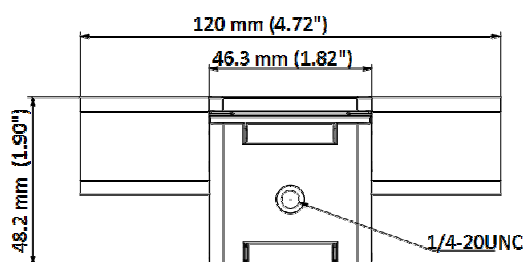

Distributed by



## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
sateru@hikvision.com

**Hikvision Korea**  
T +82-[0]31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com