

## DS-2CD2126G2-ISU

### 2 MP AcuSense Powered-by-DarkFighter Fixed Dome Network Camera



## AcuSense



Empowered by deep learning algorithms, Hikvision AcuSense technology brings human and vehicle targets classification alarms to front- and back-end devices. The system focuses on human and vehicle targets, vastly improving alarm efficiency and effectiveness.

- High quality imaging with 2 MP resolution
- Excellent low-light performance with powered-by-DarkFighter technology
- Efficient H.265+ compression technology
- Clear imaging against strong back light due to 120 dB true WDR technology
- Focus on human and vehicle classification based on deep learning
- Built-in microphone for real-time audio security, Audio and alarm interface available
- Water and dust resistant (IP67) and vandal resistant (IK10)



## ▪ Specification

| Camera                      |                                                                                                                                                                                       |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor                | 1/2.8" Progressive Scan CMOS                                                                                                                                                          |
| Max. Resolution             | 1920 × 1080                                                                                                                                                                           |
| Min. Illumination           | Color: 0.002 Lux @ (F1.4, AGC ON), B/W: 0 Lux with IR                                                                                                                                 |
| Shutter Time                | 1/3 s to 1/100,000 s                                                                                                                                                                  |
| Day & Night                 | IR cut filter                                                                                                                                                                         |
| Angle Adjustment            | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355°                                                                                                                                  |
| Lens                        |                                                                                                                                                                                       |
| Lens Type                   | Fixed focal lens, 2.8 and 4 mm optional                                                                                                                                               |
| Focal Length & FOV          | 2.8 mm, horizontal FOV 107°, vertical FOV 57°, diagonal FOV 129°<br>4 mm, horizontal FOV 86°, vertical FOV 47°, diagonal FOV 102°                                                     |
| Lens Mount                  | M12                                                                                                                                                                                   |
| Iris Type                   | Fixed                                                                                                                                                                                 |
| Aperture                    | F1.4                                                                                                                                                                                  |
| Depth of Field              | 2.8 mm: 1.1 m to ∞<br>4 mm: 1.2 m to ∞                                                                                                                                                |
| DORI                        |                                                                                                                                                                                       |
| DORI                        | 2.8 mm: D: 44 m, O: 17 m, R: 9 m, I: 4 m<br>4 mm: D: 53 m, O: 21 m, R: 11 m, I: 5 m                                                                                                   |
| Illuminator                 |                                                                                                                                                                                       |
| Supplement Light Type       | IR                                                                                                                                                                                    |
| Supplement Light Range      | Up to 30 m                                                                                                                                                                            |
| Smart Supplement Light      | Yes                                                                                                                                                                                   |
| IR Wavelength               | 850 nm                                                                                                                                                                                |
| Video                       |                                                                                                                                                                                       |
| Main Stream                 | 50 Hz: 25 fps (1920 × 1080, 1280 × 720)<br>60 Hz: 30 fps (1920 × 1080, 1280 × 720)                                                                                                    |
| Sub-Stream                  | 50 Hz: 25 fps (640 × 480, 640 × 360)<br>60 Hz: 30 fps (640 × 480, 640 × 360)                                                                                                          |
| Third Stream                | 50 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360)<br>60 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360),<br>*Third stream is supported under certain settings. |
| Video Compression           | Main stream: H.265/H.264/H.264+/H.265+<br>Sub-stream: H.265/H.264/MJPEG<br>Third stream: H.265/H.264                                                                                  |
| Video Bit Rate              | 32 Kbps to 8 Mbps                                                                                                                                                                     |
| H.264 Type                  | Baseline Profile, Main Profile, High Profile                                                                                                                                          |
| H.265 Type                  | Main Profile                                                                                                                                                                          |
| Bit Rate Control            | CBR, VBR                                                                                                                                                                              |
| Scalable Video Coding (SVC) | H.264 and H.265 encoding                                                                                                                                                              |
| Region of Interest (ROI)    | 1 fixed region(s) for main stream and sub-stream                                                                                                                                      |
| Audio                       |                                                                                                                                                                                       |
| Audio Compression           | G.711/G.722.1/G.726/MP2L2/PCM/MP3/AAC-LC                                                                                                                                              |

|                             |                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Audio Bit Rate              | 64 Kbps (G.711ulaw/G.711alaw)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 192 Kbps (MP2L2)/8 to 320 Kbps (MP3)/16 to 64 Kbps (AAC-LC)                                                                                                                                                                                                                                             |
| Audio Sampling Rate         | 8 kHz/16 kHz/32 kHz/44.1 kHz/48 kHz                                                                                                                                                                                                                                                                                                                                           |
| Environment Noise Filtering | Yes                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Network</b>              |                                                                                                                                                                                                                                                                                                                                                                               |
| Protocols                   | TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv4, IPv6, UDP, Bonjour, SSL/TLS, PPPoE, SNMP, WebSocket, WebSockets                                                                                                                                                                                                         |
| Simultaneous Live View      | Up to 6 channels                                                                                                                                                                                                                                                                                                                                                              |
| API                         | Open Network Video Interface (Profile S, Profile G, Profile T), ISAPI, SDK, ISUP                                                                                                                                                                                                                                                                                              |
| Smooth Streaming            | Yes                                                                                                                                                                                                                                                                                                                                                                           |
| User/Host                   | Up to 32 users<br>3 user levels: administrator, operator, and user                                                                                                                                                                                                                                                                                                            |
| Security                    | Password protection, complicated password, HTTPS encryption, 802.1X authentication (EAP-TLS, EAP-LEAP, EAP-MD5), watermark, IP address filter, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for Open Network Video Interface, RTP/RTSP over HTTPS, control timeout settings, security audit log, TLS 1.3, host authentication (MAC address) |
| Network Storage             | NAS (NFS, SMB/CIFS), Auto Network Replenishment (ANR),<br>Together with high-end Hikvision memory card, memory card encryption and health detection are supported.                                                                                                                                                                                                            |
| Client                      | iVMS-4200, Hik-Connect, Hik-Central                                                                                                                                                                                                                                                                                                                                           |
| Web Browser                 | Plug-in required live view: IE 10, IE 11<br>Plug-in free live view: Chrome 57.0+, Firefox 52.0+<br>Local service: Chrome 57.0+, Firefox 52.0+                                                                                                                                                                                                                                 |
| <b>Image</b>                |                                                                                                                                                                                                                                                                                                                                                                               |
| Image Parameters Switch     | Yes                                                                                                                                                                                                                                                                                                                                                                           |
| Image Settings              | Rotate mode, saturation, brightness, contrast, sharpness, gain, white balance, adjustable by client software or web browser                                                                                                                                                                                                                                                   |
| Day/Night Switch            | Day, Night, Auto, Schedule                                                                                                                                                                                                                                                                                                                                                    |
| Wide Dynamic Range (WDR)    | 120 dB                                                                                                                                                                                                                                                                                                                                                                        |
| SNR                         | ≥ 52 dB                                                                                                                                                                                                                                                                                                                                                                       |
| Image Enhancement           | BLC, HLC, 3D DNR                                                                                                                                                                                                                                                                                                                                                              |
| Privacy Mask                | Yes                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Interface</b>            |                                                                                                                                                                                                                                                                                                                                                                               |
| Ethernet Interface          | 1 RJ45 10 M/100 M self-adaptive Ethernet port                                                                                                                                                                                                                                                                                                                                 |
| On-Board Storage            | Built-in memory card slot, support microSD card, up to 256 GB                                                                                                                                                                                                                                                                                                                 |
| Built-in Microphone         | Yes                                                                                                                                                                                                                                                                                                                                                                           |
| Audio                       | 1 input (line in), two-core terminal block, max. input amplitude: 3.3 Vpp, input impedance: 4.7 KΩ, interface type: non-equilibrium;<br>1 output (line out), two-core terminal block, max. output amplitude: 3.3 Vpp, output impedance: 100 Ω, interface type: non-equilibrium                                                                                                |
| Alarm                       | 1 alarm input, 1 alarm output (max. 12 VDC, 30 mA)                                                                                                                                                                                                                                                                                                                            |
| Reset Key                   | Yes                                                                                                                                                                                                                                                                                                                                                                           |

| Event                            |                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Basic Event                      | Motion detection (support alarm triggering by specified target types (human and vehicle)), video tampering alarm, exception                                                                                                                                                                                                                             |
| Smart Event                      | Line crossing detection, intrusion detection, region entrance detection, region exiting detection (support alarm triggered by specified target types (human and vehicle)), scene change detection                                                                                                                                                       |
| Linkage                          | Upload to FTP/NAS/memory card, notify surveillance center, send email, trigger recording, trigger capture, trigger alarm output, audible warning                                                                                                                                                                                                        |
| Deep Learning Function           |                                                                                                                                                                                                                                                                                                                                                         |
| Face Capture                     | Yes                                                                                                                                                                                                                                                                                                                                                     |
| General                          |                                                                                                                                                                                                                                                                                                                                                         |
| Power                            | 12 VDC $\pm$ 25%, 0.5 A, max. 6 W, $\varnothing$ 5.5 mm coaxial power plug, reverse polarity protection,<br>PoE: 802.3af, Class 3, 36 V to 57 V, 0.2 A to 0.15 A, max. 7.5 W                                                                                                                                                                            |
| Material                         | Metal                                                                                                                                                                                                                                                                                                                                                   |
| Dimension                        | $\varnothing$ 121.4 $\times$ 92.2 mm ( $\varnothing$ 4.8" $\times$ 3.6")                                                                                                                                                                                                                                                                                |
| Package Dimension                | 150 mm $\times$ 150 mm $\times$ 141 mm (5.9" $\times$ 5.9" $\times$ 5.6")                                                                                                                                                                                                                                                                               |
| Weight                           | Approx. 550 g (1.2 lb.)                                                                                                                                                                                                                                                                                                                                 |
| With Package Weight              | Approx. 800 g (1.8 lb.)                                                                                                                                                                                                                                                                                                                                 |
| Storage Conditions               | -30 $^{\circ}$ C to 60 $^{\circ}$ C (-22 $^{\circ}$ F to 140 $^{\circ}$ F). Humidity 95% or less (non-condensing)                                                                                                                                                                                                                                       |
| Startup and Operating Conditions | -30 $^{\circ}$ C to 60 $^{\circ}$ C (-22 $^{\circ}$ F to 140 $^{\circ}$ F). Humidity 95% or less (non-condensing)                                                                                                                                                                                                                                       |
| Language                         | 33 languages<br>English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil), Ukrainian |
| General Function                 | Anti-flicker, heartbeat, mirror, privacy mask, flash log, password reset via email, pixel counter                                                                                                                                                                                                                                                       |
| Approval                         |                                                                                                                                                                                                                                                                                                                                                         |
| EMC                              | FCC: 47 CFR Part 15, Subpart B,<br>CE-EMC: EN 55032: 2015, EN 61000-3-2:2019, EN 61000-3-3: 2013+A1:2019, EN 50130-4: 2011 +A1: 2014,<br>KC: KN32: 2015, KN35: 2015                                                                                                                                                                                     |
| Safety                           | UL: UL 62368-1,<br>CB: IEC 62368-1: 2014+A11,<br>CE-LVD: EN 62368-1: 2014/A11: 2017,<br>LOA: IEC/EN 60950-1                                                                                                                                                                                                                                             |
| Environment                      | CE-RoHS: 2011/65/EU,<br>WEEE: 2012/19/EU,<br>Reach: Regulation (EC) No 1907/2006                                                                                                                                                                                                                                                                        |
| Protection                       | IP67: IEC 60529-2013, IK10: IEC 62262:2002                                                                                                                                                                                                                                                                                                              |

## ▪ Available Model

DS-2CD2126G2-ISU (2.8/4 mm)


## ▪ Typical Application

Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.

This model has NO SPECIFIC PROTECTION.

| Level                  | Description                                                                                                                                                                                                                                            |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Top-level protection   | Hikvision products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more.                                             |
| Moderate protection    | Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2 kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain. |
| No specific protection | Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed.                                                                                                                                  |

## ▪ Dimension

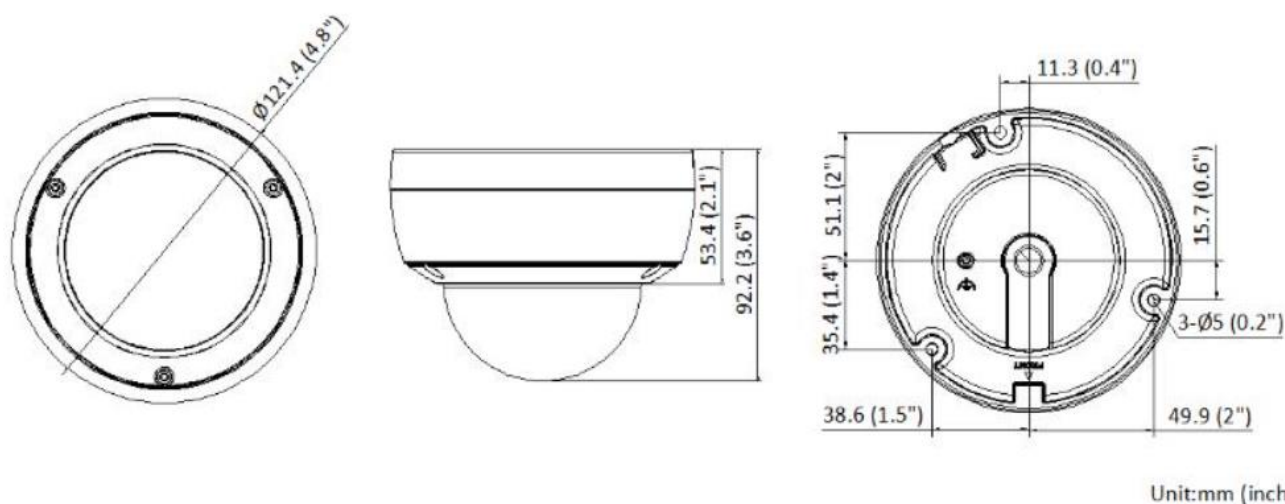

## ▪ Accessory

## ▪ Optional

| DS-1272ZJ-120<br>Wall Mount                                                       | DS-1272ZJ-120-TR15<br>Wall Mount                                                  | DS-1276ZJ-SUS<br>Corner Mount                                                     | DS-1280ZJ-DM46<br>Junction Box                                                      | DS-1253ZJ-M<br>Rain Shade                                                           |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| DS-1275ZJ-SUS<br>Vertical Pole Mount                                              | DS-1272ZJ-120B<br>Wall Mount                                                      | DS-1271ZJ-120<br>Pendant Mount                                                    |                                                                                     |                                                                                     |
|  |  |  |                                                                                     |                                                                                     |

Distributed by


**HIKVISION®**

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com