

DS-PA0103-A IP Horn Speaker



- Network broadcast: playing audio file or real-time audio stream
- SD card broadcast: playing audio files from SD card
- One-way audio: remote computer can talk to the horn speaker
- On-the spot sound collection: remote computer can collect the real-time sound around the horn speaker





▪ Specification

Parameters	
Max sound pressure level	120 db
Network Interface	10/100Base-TX self-adaptive network, RJ45 interface
Network Protocol	TCP, UDP, RTP, ARP, ICMP, DHCP, DNS, IGMP, HTTP
Audio Protocol	MP3, G.711a/u, G.722
Storage	Micro SD Card, up to 32 GB *need SD card to play pre-recorded audio
MIC Input	0.2 Vrms
Speaker Output	8 Vrms
Power Input	PoE (IEEE 802.3af), maximum 13 W
Approvals	EN 55022 Class B, EN 61000-6-1, EN 61000-6-2, EN 55024, EN 50121-4, IEC 62236-4, FCC Part 15 Subpart B Class B, ICES-003 Class B, VCCI Class B, C-tick AS/NZS CISPR 22 Class B, KCC KN22 Class B, KN24, IEC/EN/UL 60950-1, IEC/EN/UL 60950-22, IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-64, IEC 60068-2-78, IEC/EN 60529 IP66, IEC/EN 60529 IP67,
Color	White
Weight	Approx. 1.5 kg (3.31 lb.)
Material	Casing: aluminum alloy Rear cover: stainless steel
Dimension	With bracket: 242 mm × 182 mm × 338.5 mm (9.53" × 7.17" × 13.33") Without bracket: 242 mm × 182 mm × 250 mm (9.53" × 7.17" × 9.84")
Power consumption	< 1 W (without sound), maximum 13 W (producing sound)
Protection level	IP67
Operating Temperature	-40°C to 60°C (-40°F to 140°F)
Frequency Response	300 Hz~12.5 kHz
Coverage Pattern	70° horizontal by 100° vertical
Amplifier Description	Built-in 15 W Class-D amplifier

▪ Available Model

DS-PA0103-A

▪ Dimension

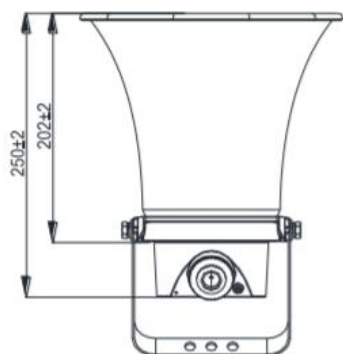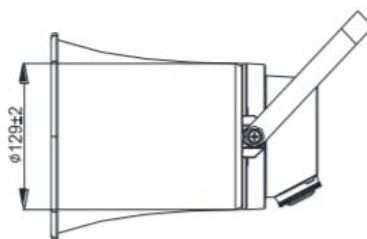

See Far, Go Further



www.hikvision.com
support@hikvision.com

