

DS-KHL14X
4 Color Door Light



- Wall-mounted 4-color door light
- Equipped with four independent zones, each capable of displaying red, green, yellow, or blue illumination.
- Supports RS-485 communication for connection with bedhead/bedside terminals


▪ Specification

Device interfaces	
Communication interface	RS-485 Protocol
General	
Installation	Wall-mounting
Working temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Dimension (W × H × D)	120.8 mm × 90.8 mm × 57 mm (4.76" × 3.57" × 2.24")
Material	ABS Body, PC Lens
Power supply	12 VDC


▪ Available Model

DS-KHL14X(Overseas Standard)

▪ Dimension

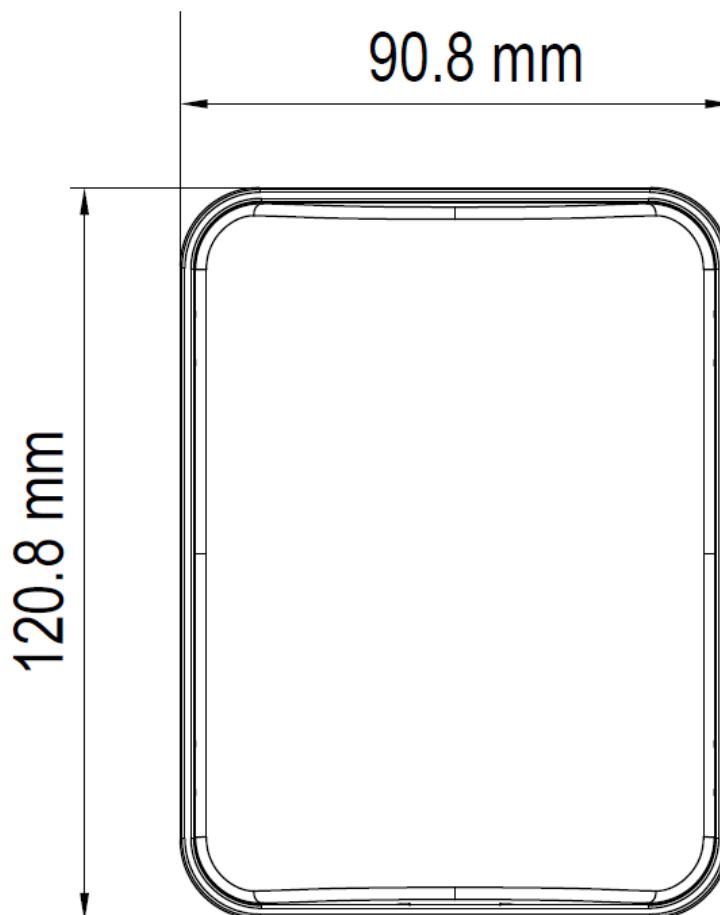

Front View

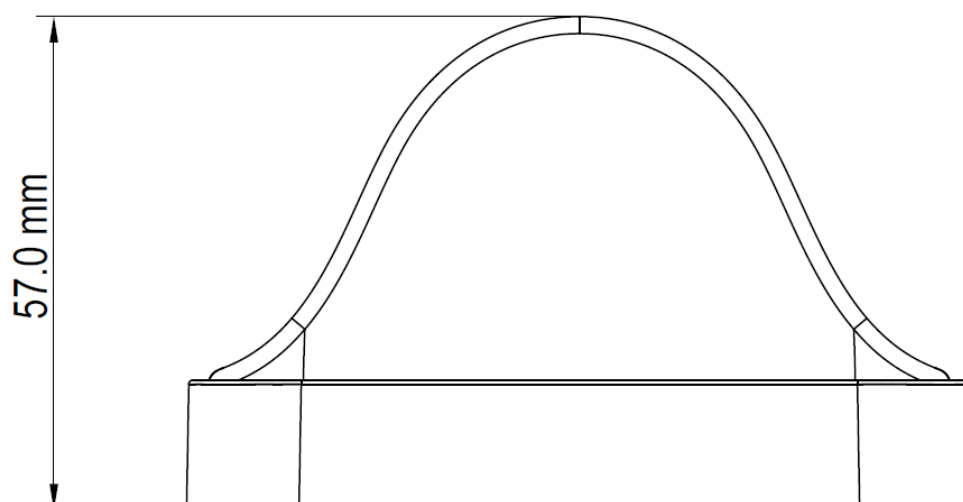

SideView

See Far, Go Further



www.hikvision.com
support@hikvision.com

