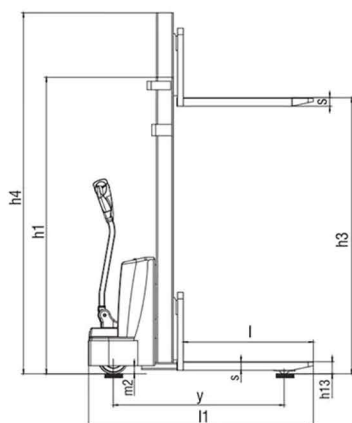


Specificatie	Valoare
Model	QDA12EL
Tip de deplasare	Electric
Mod de operare	Pe jos
Capacitate nominala	1200 kg
Centru de sarcina	600 mm
Greutate cu baterie	553 kg
Roti	Roti din poliuretan
Inaltime de ridicare	1600 mm / 2500 mm
Inaltime catarg coborat	2080 mm / 1830 mm
Inaltime totala	2050 mm / 2950 mm
Inaltime minima furci	90 mm
Lungime totala	1750 mm
Latime totala	790 mm
Dimensiuni furci	60/142/1070 mm
Latime furci	570 mm / 660 mm
Garda la sol	30 mm
Latime culoar cu palet 1000x1200 transversal	2145 mm
Latime culoar cu palet 800x1200 longitudinal	2050 mm
Raza de intoarcere	1390 mm
Viteza de deplasare incarcat/neincarcat	3.5 km/h / 5 km/h
Viteza de ridicare incarcat/neincarcat	100 mm/s / 200 mm/s
Viteza de coborare incarcat/neincarcat	120 mm/s / 100 mm/s
Panta maxima incarcat/neincarcat	3% / 10%
Frana de deplasare	Frana electromagnetica regenerativa
Putere motor deplasare	0.6 kW
Putere motor ridicare	2 kW
Tensiune/capacitate baterie	24V / 85Ah
Nivel de zgomot la urechea operatorului (DIN12053)	<70