

10NDL88 8 Ω

Woofer

- 1400 W continuous program power capacity
- 88 mm (3.5 in) aluminum wire voice coil
- 61 - 2500 Hz response
- 96 dB sensitivity
- Neodymium magnet allows a very light yet powerful motor assembly
- Aluminium demodulating ring for very low distortion
- Ventilated voice coil gap for reduced power



10NDL88 8 Ω

Woofer

SPECIFICATIONS

Nominal Diameter	250 mm (10 in)
Nominal Impedance	8 Ω
Minimum Impedance	6.3 Ω
Nominal Power Handling	700 W
2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.	
Continuous Power Handling	1400 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	96 dB
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	61 Hz - 2500 Hz
Voice Coil Diameter	88 mm (3.5 in)
Winding Material	Aluminium
Former Material	Glass Fibre
Winding Depth	21.7 mm (0.85 in)
Magnetic Gap Depth	11 mm (0.43 in)
Flux Density	1.05 T
Woofer Cone Treatment	WP Waterproof Front Side

PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	61 Hz
Re	5.1 Ω
Qes	0.26
Qms	7.3
Qts	0.25
Vas	18.4 dm³ (0.65 ft³)
Sd	320 cm² (49.6 in²)
η ₀	1.59 %
X _{max}	8.1 mm
X _{var}	7.5 mm
M _{ms}	53.5 g
Bl	20 Tm
Le	1.18 mH
EBP	235 Hz

DESIGN

Surround Shape	Triple Roll
Cone Shape	Curvilinear
Magnet Material	Neodymium Inside Slug
Spider	Double Silicone
Pole Design	T-Pole
Woofer Cone Treatment	WP Waterproof Front Side
Recommended Enclosure	20 dm³ (0.71 ft³)
Recommended Tuning	70 Hz

MOUNTING AND SHIPPING INFO



Overall Diameter	261 mm (10.28 in)
Bolt Circle Diameter	246 mm (9.69 in)
Baffle Cutout Diameter	232 mm (9.13 in)
Depth	128 mm (5.04 in)
Flange and Gasket Thickness	14 mm (0.55 in)
Air Volume Occupied by Driver	1.5 dm³ (0.05 ft³)
Net Weight	4.6 kg (10.14 lb)
Shipping Units	1 pcs
Shipping Weight	5.2 kg (11.46 lb)
Shipping Box	295x314x175 mm (11.61x12.36x6.89 in)


SERVICE KITS

LF recone-kits	RCK10NDL888
----------------	--------------------

10NDL88 8 Ω

Woofer

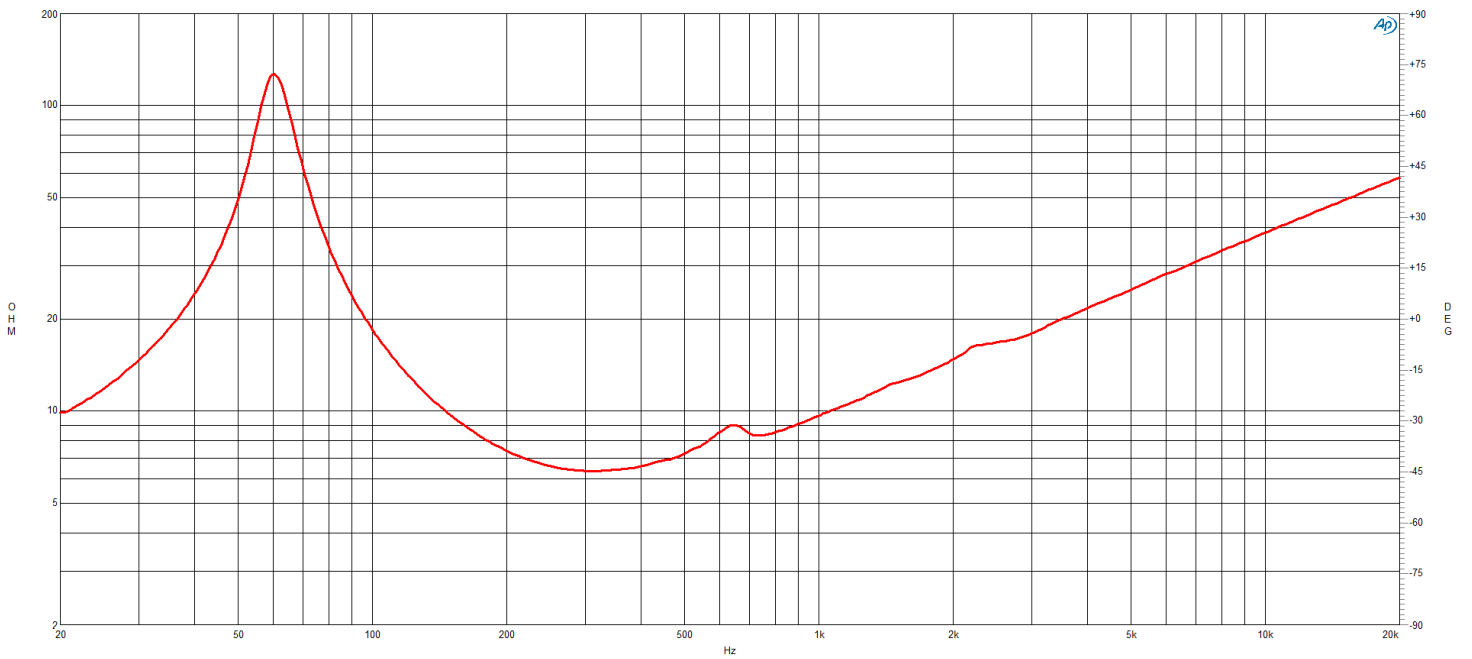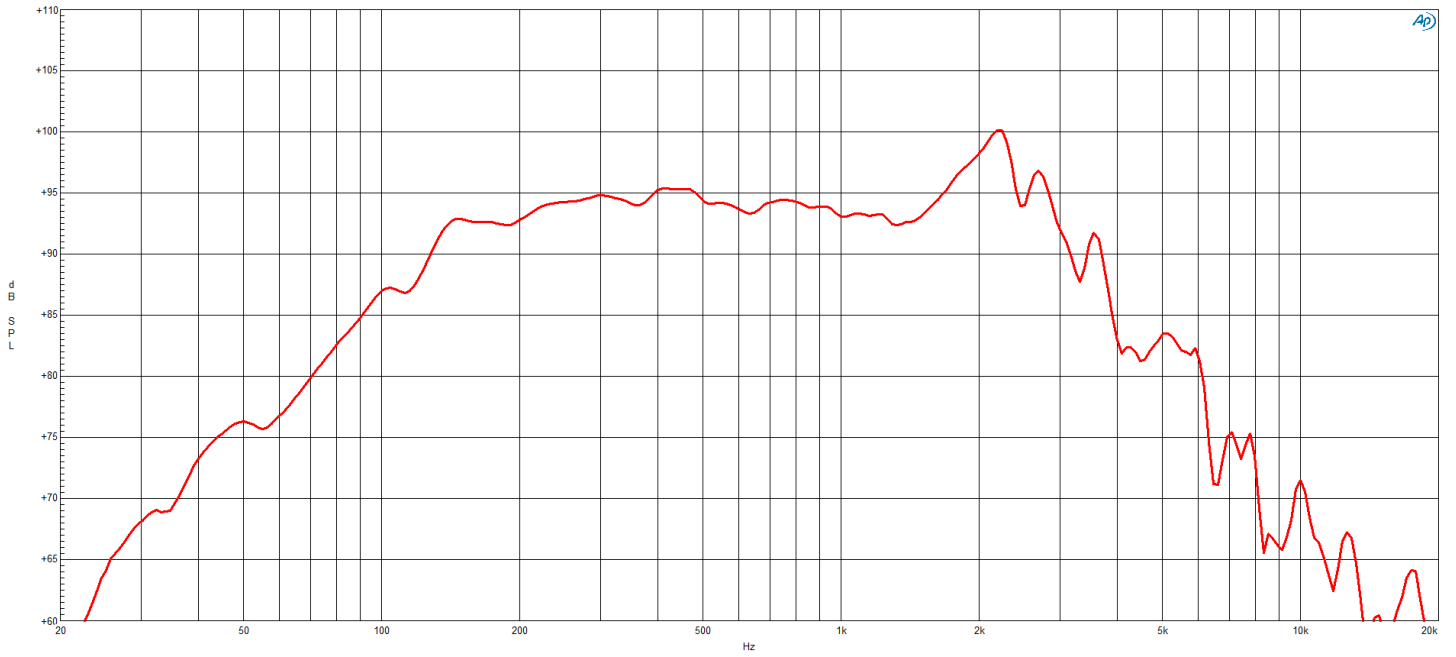

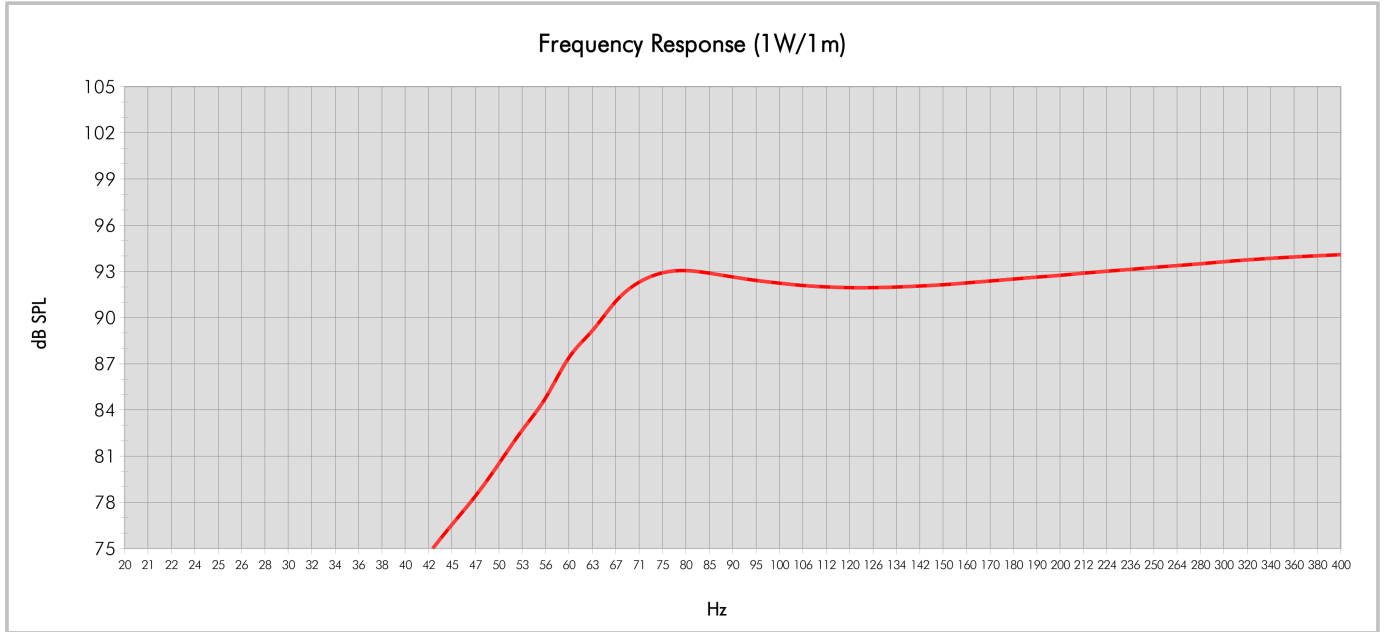

Model:	10NDL88	Configuration:	One Driver
Enclosure Type:	Bass Reflex		
Internal Net Volume (Litres):	20	QB:	5
Tuning Frequency (Hz):	70	Port Area (cm ²):	78
Frequency (-3 dB) (Hz):	69,6	Port Length (cm):	17,5
Frequency (-10 dB) (Hz):	56,1		

10NDL88 8 Ω

Woofer

