

**10NSM76** 8 Ω**Midrange**

- 800 W continuous program power capacity
- 76 mm (3 in) aluminium voice coil
- 235 - 3500 Hz response
- 100 dB sensitivity
- Ideal for Direct Radiation and Horn Loaded Midrange application

For simplified cabinet assembly and efficient thermal transfer to the air, our NSM series of sealed back midranges feature a cast aluminum sealed chassis, high strength neodymium motor, and large internal volume for good low frequency performance. Large voice coils provide power handling, while careful selection of suspension and cone components results in exceptional sensitivity. These dedicated narrow-bandwidth midranges offer the lowest distortion at given output of any midrange available.

Available exclusively with 6.3+4.8 mm fast-on terminal tab



# 10NSM76 8 Ω

Midrange

## SPECIFICATIONS

|                                                                                                                                                     |                                 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| Nominal Diameter                                                                                                                                    | <b>250 mm (10 in)</b>           |
| Nominal Impedance                                                                                                                                   | <b>8 Ω</b>                      |
| Minimum Impedance                                                                                                                                   | <b>7 Ω</b>                      |
| Nominal Power Handling                                                                                                                              | <b>400 W</b>                    |
| 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air. |                                 |
| Continuous Power Handling                                                                                                                           | <b>800 W</b>                    |
| Power on Continuous Program is defined as 3 dB greater than the Nominal rating.                                                                     |                                 |
| Sensitivity                                                                                                                                         | <b>100 dB</b>                   |
| Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.                                                                                  |                                 |
| Frequency Range                                                                                                                                     | <b>235 Hz - 3500 Hz</b>         |
| Voice Coil Diameter                                                                                                                                 | <b>76 mm (3 in)</b>             |
| Winding Material                                                                                                                                    | <b>Aluminium</b>                |
| Former Material                                                                                                                                     | <b>Glass Fibre</b>              |
| Winding Depth                                                                                                                                       | <b>11 mm (0.45 in)</b>          |
| Magnetic Gap Depth                                                                                                                                  | <b>9 mm (0.35 in)</b>           |
| Flux Density                                                                                                                                        | <b>1.6 T</b>                    |
| Woofer Cone Treatment                                                                                                                               | <b>WP Waterproof Front Side</b> |

## PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

|                  |                                                 |
|------------------|-------------------------------------------------|
| Fs               | <b>235 Hz</b>                                   |
| Re               | <b>5.2 Ω</b>                                    |
| Qes              | <b>0.55</b>                                     |
| Qms              | <b>8.6</b>                                      |
| Qts              | <b>0.52</b>                                     |
| Vas              | <b>2 dm<sup>3</sup> (0.07 ft<sup>3</sup>)</b>   |
| Sd               | <b>320 cm<sup>2</sup> (49.6 in<sup>2</sup>)</b> |
| η <sub>0</sub>   | <b>4.5 %</b>                                    |
| X <sub>max</sub> | <b>3.5 mm</b>                                   |
| X <sub>var</sub> | <b>3.5 mm</b>                                   |
| M <sub>ms</sub>  | <b>33 g</b>                                     |
| Bl               | <b>21.5 Tm</b>                                  |
| Le               | <b>0.9 mH</b>                                   |
| EBP              | <b>427 Hz</b>                                   |

## DESIGN

|                       |                                 |
|-----------------------|---------------------------------|
| Surround Shape        | <b>Accordion</b>                |
| Cone Shape            | <b>Radial</b>                   |
| Magnet Material       | <b>Neodymium Ring</b>           |
| Spider                | <b>Single</b>                   |
| Pole Design           | <b>T-Pole</b>                   |
| Woofer Cone Treatment | <b>WP Waterproof Front Side</b> |

## MOUNTING AND SHIPPING INFO



|                               |                                               |
|-------------------------------|-----------------------------------------------|
| Overall Diameter              | <b>291 mm (11.46 in)</b>                      |
| Bolt Circle Diameter          | <b>274 mm (10.79 in)</b>                      |
| Baffle Cutout Diameter        | <b>234 mm (9.21 in)</b>                       |
| Depth                         | <b>130 mm (5.12 in)</b>                       |
| Flange and Gasket Thickness   | <b>12 mm (0.47 in)</b>                        |
| Air Volume Occupied by Driver | <b>5 dm<sup>3</sup> (0.18 ft<sup>3</sup>)</b> |
| Net Weight                    | <b>4.55 kg (10.03 lb)</b>                     |
| Shipping Units                | <b>1 pcs</b>                                  |
| Shipping Weight               | <b>5.45 kg (12.02 lb)</b>                     |
| Shipping Box                  | <b>360x360x200 mm (14.17x14.17x7.87 in)</b>   |

## SERVICE KITS

|                |                     |
|----------------|---------------------|
| LF recone-kits | <b>RCK010NSM768</b> |
|----------------|---------------------|

**10NSM76 8 Ω**

Midrange

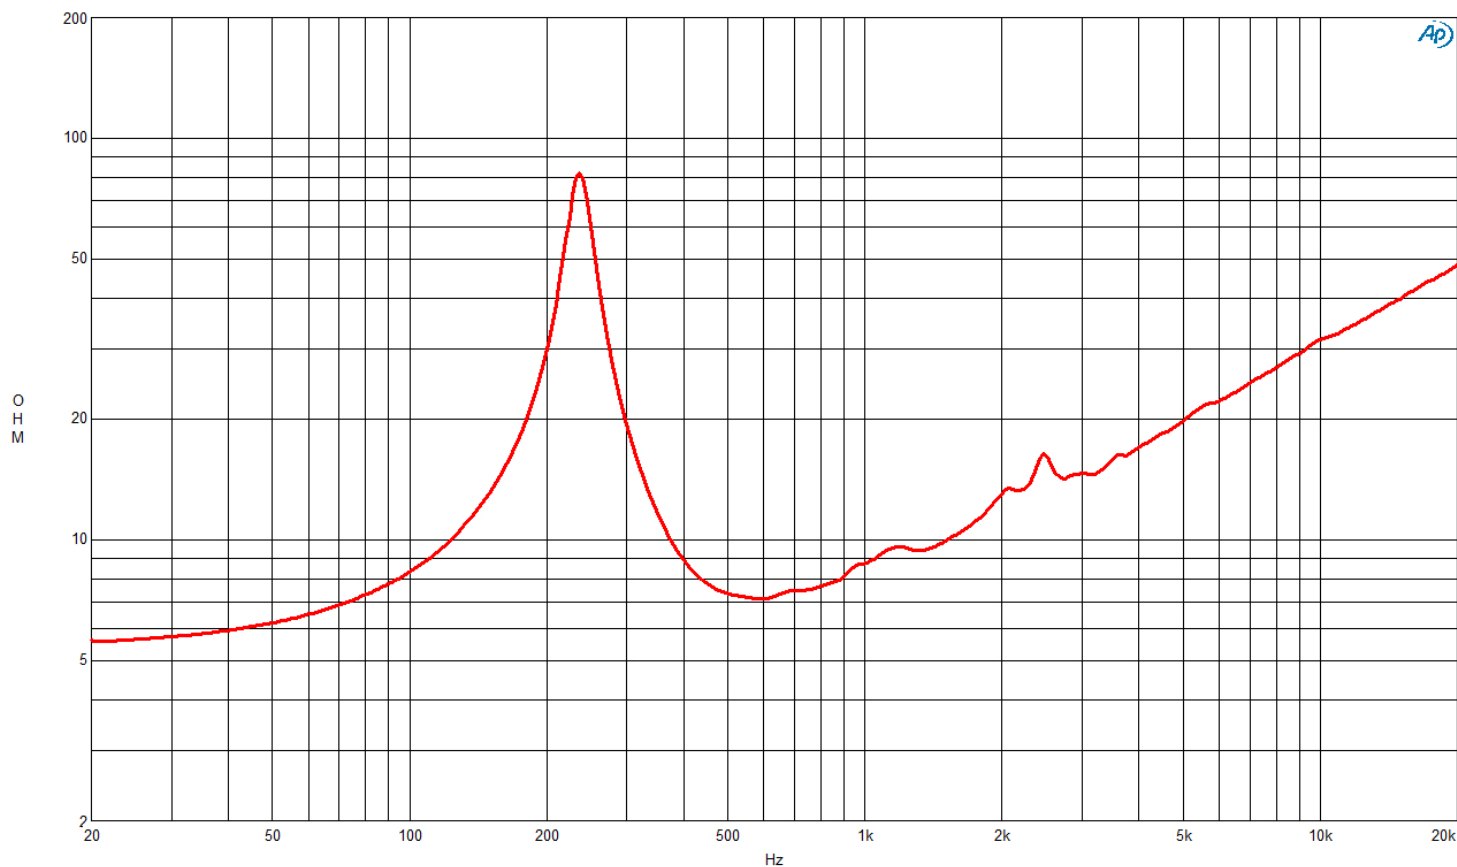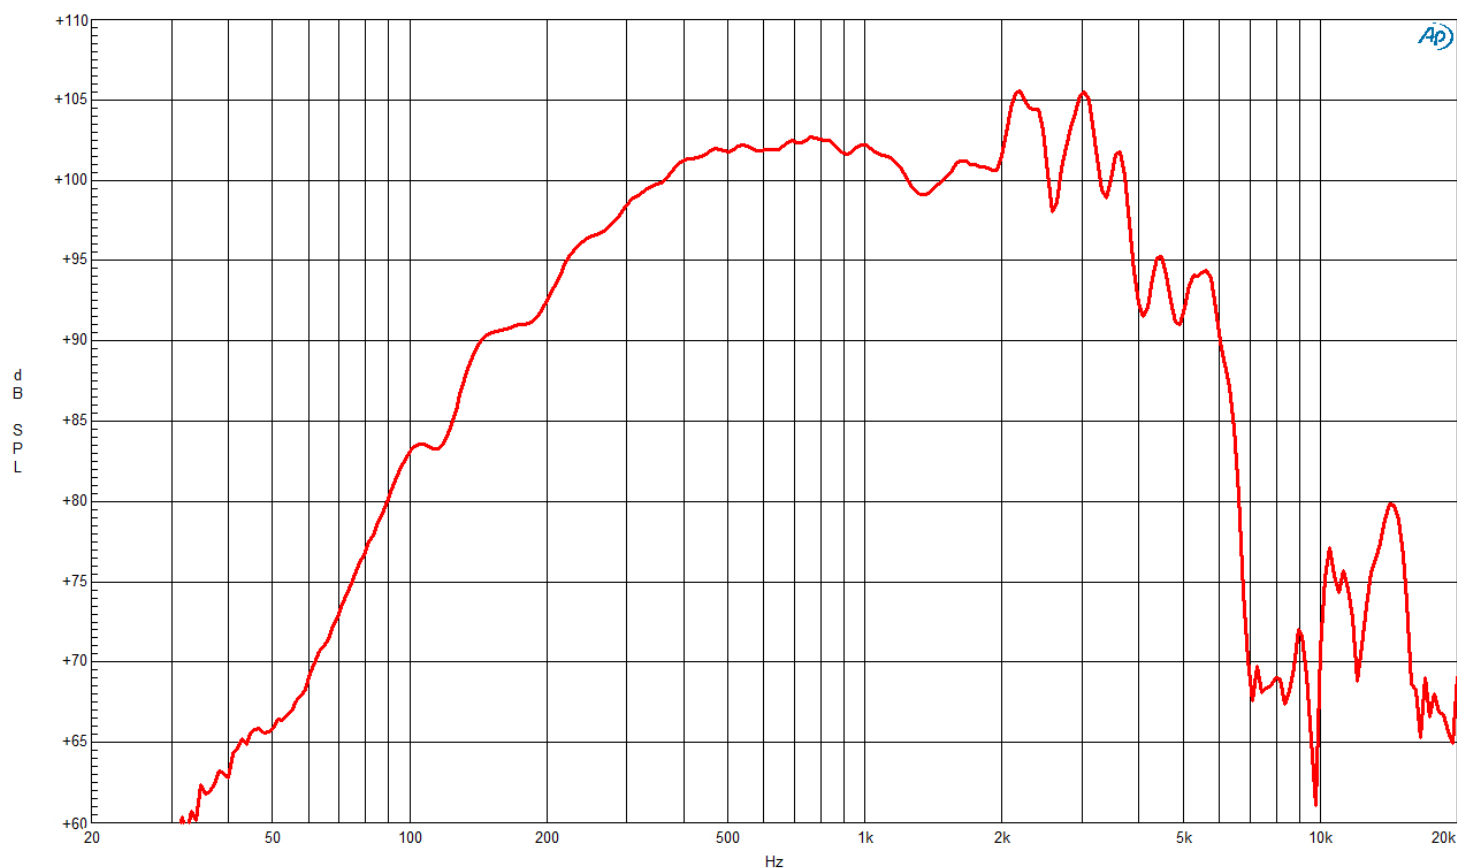

**10NSM76** 8 Ω

## Midrange

