

DE400TN 16 Ω

SPECIFICATIONS

Driver mounted on B&C ME 45 horn.

Throat Diameter	25 mm (1 in)
Nominal Impedance	16 Ω
Minimum Impedance	10.6 Ω
Nominal Power Handling	50 W
<small>2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.</small>	
Continuous Power Handling	100 W
<small>Power on Continuous Program is defined as 3 dB greater than the Nominal rating.</small>	
Sensitivity	107 dB
<small>Applied RMS Voltage is set to 4 V for 16 ohms Nominal Impedance.</small>	
Frequency Range	1.2 kHz - 18 kHz
Recommended Crossover	1.5 kHz
<small>12 dB/oct. or higher slope high-pass filter.</small>	
Voice Coil Diameter	44 mm (1.7 in)
Winding Material	Aluminium
Inductance	0.11 mH
Flux Density	1.8 T
Diaphragm Material	Titanium

MOUNTING AND SHIPPING INFO

Two M6 holes 180° on 76 mm (3 in) diameter

Overall Diameter	85 mm (3.3 in)
Depth	44 mm (1.7 in)
Net Weight	0.86 kg (1.88 lb)
Shipping Units	1 pcs
Shipping Weight	0.89 kg (1.95 lb)
Shipping Box	105x105x65 mm (4.13x4.13x2.56 in)



SERVICE KITS

HF replacement-diaphragm	MMD400TN16
--------------------------	-------------------

- 100 W continuous program power capacity
- 1" horn throat diameter
- 44 mm (1.7 in) aluminium voice coil
- Titanium diaphragm
- 1000 - 18000 Hz response
- 107 dB sensitivity
- Compact Neodymium magnet assembly
- Shorting copper cap for extended HF response



DE400TN 16 Ω

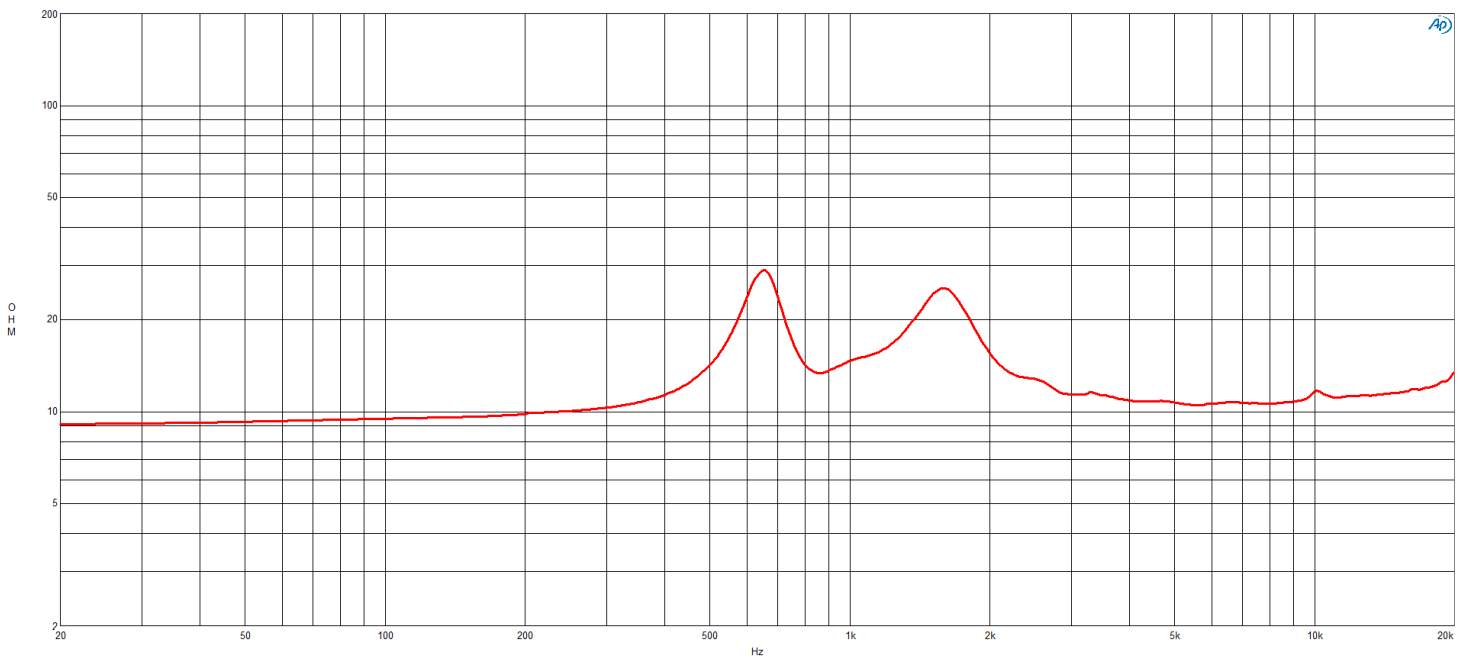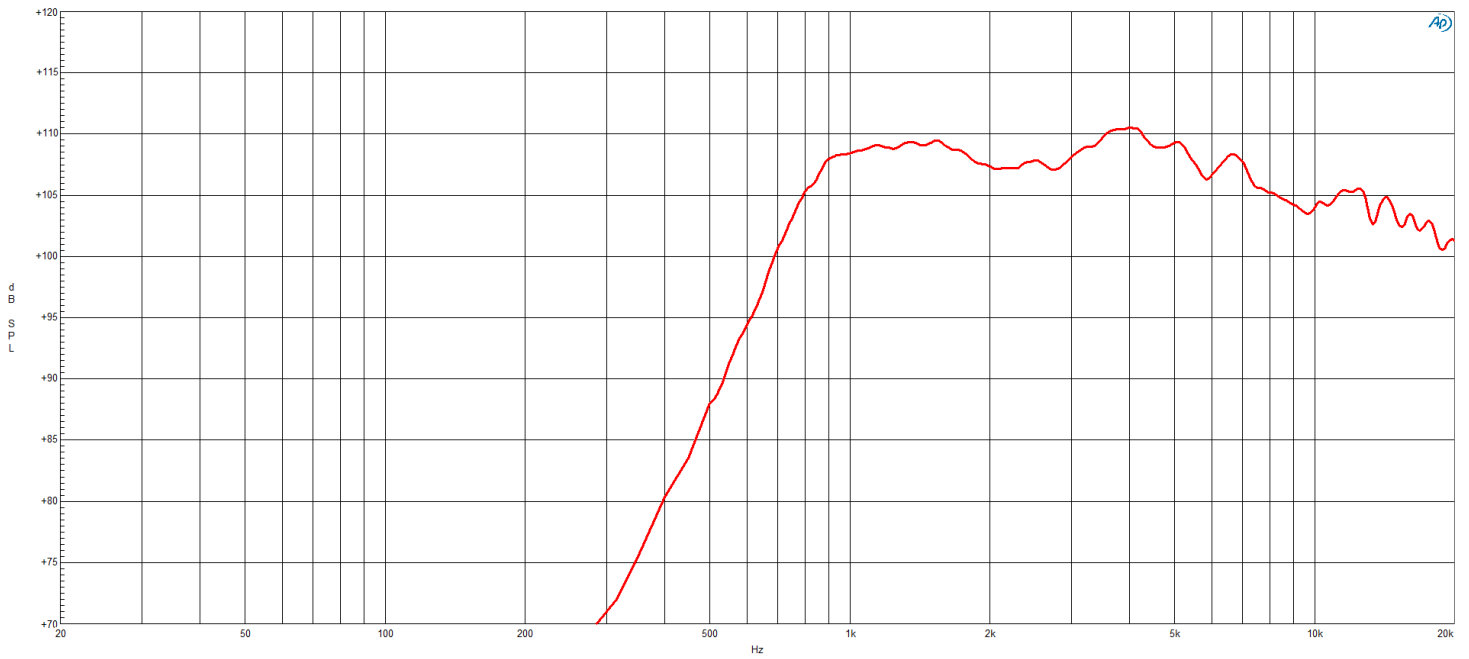

DE400TN 16 Ω

