

## DE640P 8 Ω

### SPECIFICATIONS

Driver mounted on B&C ME90 horn

Throat Diameter	<b>36 mm (1.4 in)</b>
Nominal Impedance	<b>8 Ω</b>
Minimum Impedance	<b>7.6 Ω</b>
Nominal Power Handling	<b>70 W</b>
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	
Continuous Power Handling	<b>140 W</b>
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	<b>109 dB</b>
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	<b>1 kHz - 18 kHz</b>
Recommended Crossover	<b>1.2 kHz</b>
12 dB/oct. or higher slope high-pass filter.	
Voice Coil Diameter	<b>65 mm (2.5 in)</b>
Winding Material	<b>Aluminium</b>
Inductance	<b>0.14 mH</b>
Flux Density	<b>1.95 T</b>
Diaphragm Material	<b>HT Polymer</b>

### MOUNTING AND SHIPPING INFO

<p>Four M6 holes 90° on 76 mm (3 in) diameter</p>



Overall Diameter	<b>110 mm (4.33 in)</b>
Depth	<b>51 mm (2.01 in)</b>
Net Weight	<b>1.4 kg (3.09 lb)</b>

- 140 W continuous program power capacity
- 1.4" horn throat diameter
- 65 mm (2.5 in) aluminium voice coil
- HT polymer diaphragm
- 1000 - 18000 Hz response
- 109 dB sensitivity
- Neodymium magnet assembly with shorting copper cap

The DE640P ring radiator high frequency driver features a HT polymer diaphragm with a neodymium magnet motor. Extensive FEA modelling and physical testing over the last several years has culminated in these 2.5 inch (64mm) coil, ring radiator drivers with outstanding sensitivity, high frequency extension, and compactness. A practical recommended crossover point of 1.2kHz and sensitivity of 109dB allow the DE640P to be suitable for a wide range of applications, including compact two way point source boxes and line arrays. Also available, [DE640U](#) with Polyimide diaphragm.



**DE640P** 8 Ω

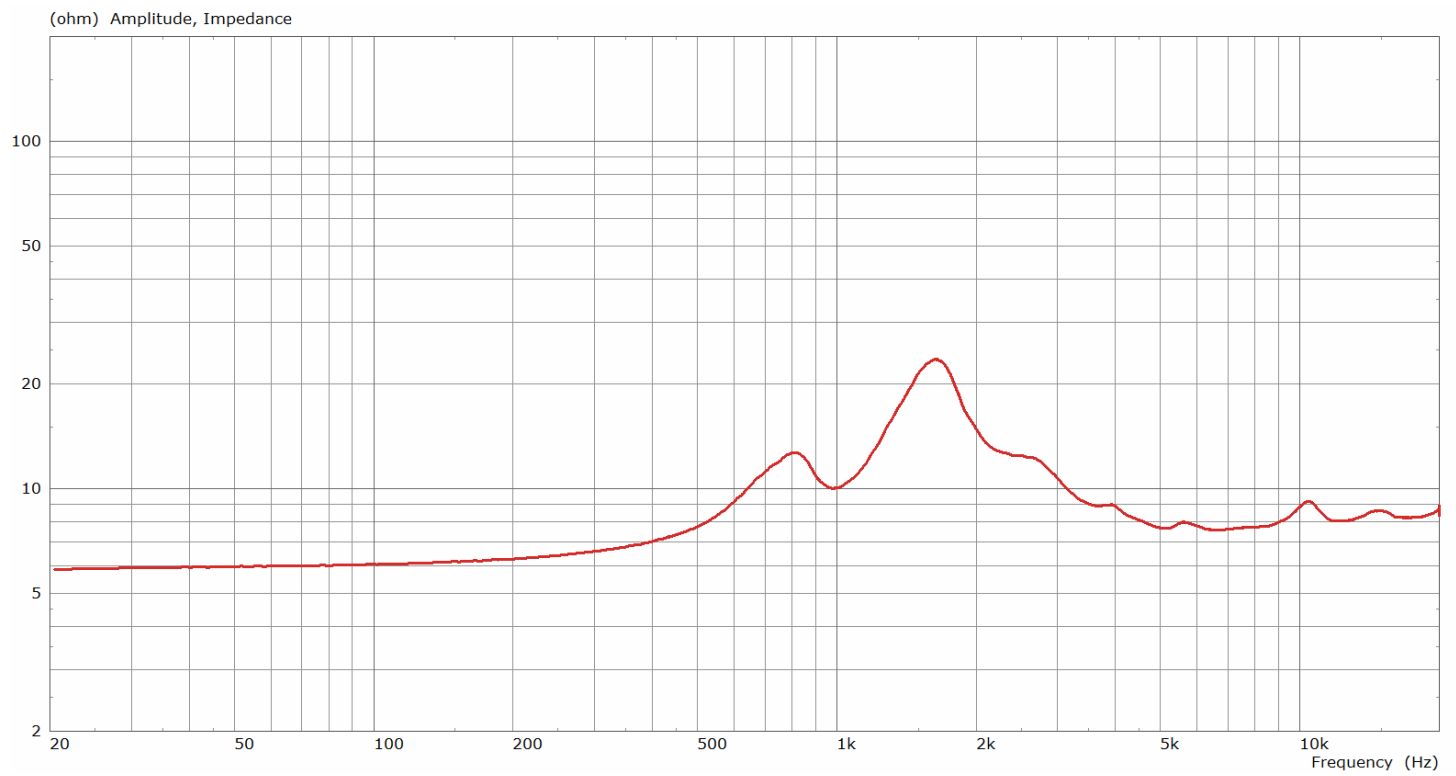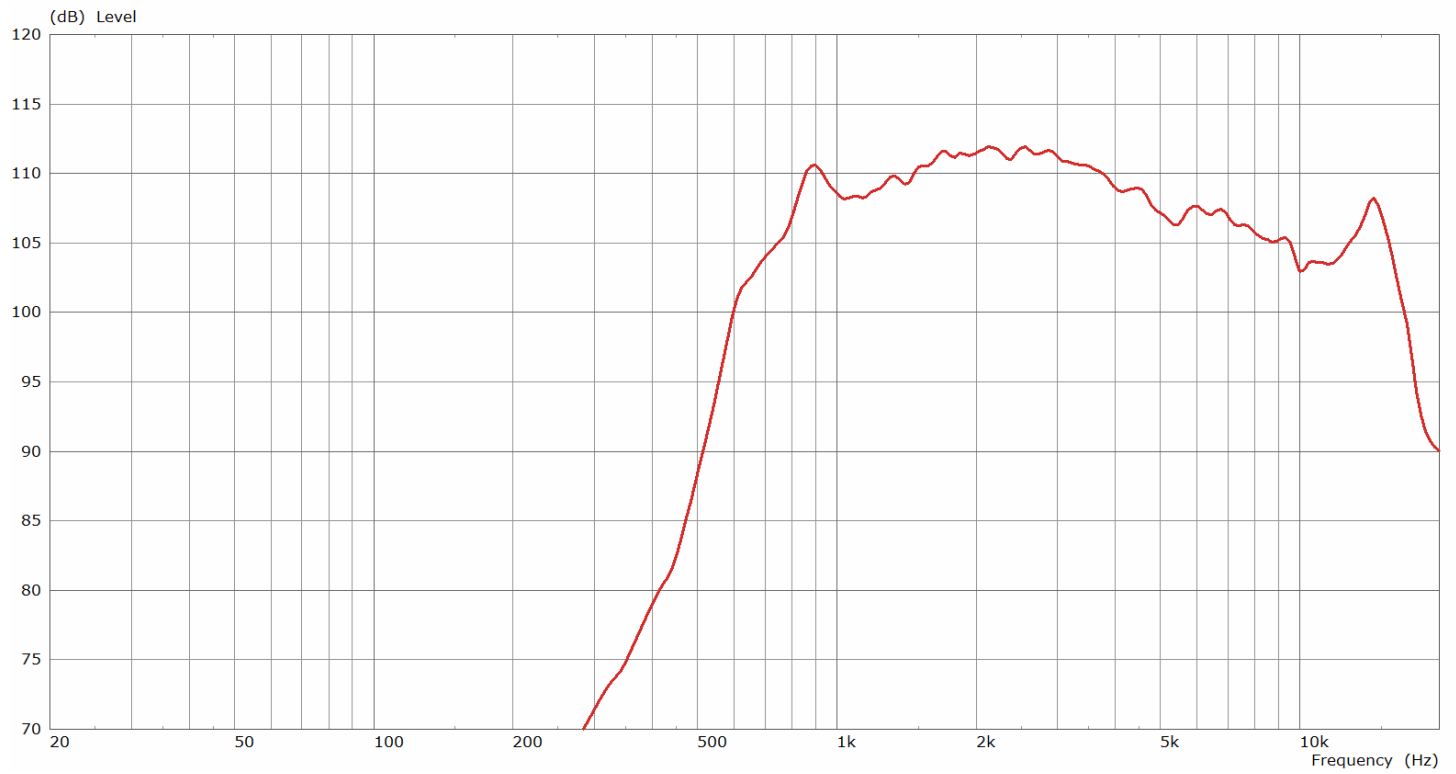

**DE640P** 8 Ω

