



SMART GATEWAY

ATLO-GATE-32-TUYA



USER MANUAL

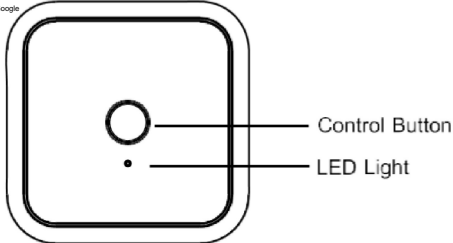

Input: 100–250V ~ 50/60Hz

WiFi Frequency: 2.4GHz only

Protocol: IEEE 802.11b/g/n & Bluetooth

APP: SmartLife/Tuya

Total Number Connected: 32

Working Temperature: -10°C~45°C

Working Humidity: 10%-90% RH (no condensation)

For Indoor Use Only

Pair the Wi-Fi Hub and add the device

1. Pair the WI-FI Hub

- 1.1 Long press the Wi-Fi Hub Control button for 5s until the green light flashes quickly, and enter the pairing mode.
then Trun on the phone's bluetooth
- 1.2 Tap "Add device" or "+" to add the smart device in app.
Select "Gateway Control " > "Socket Gateway(BLE)".
Waiting for connecting to be 100%. Edit the name of your Hub completed.

2. Device and gateway associated

- 2.1 Press and hold device button for 5 seconds until the LED light rapidly flashing
- 2.2 Tap "Add device" to add the device in Gateway.
Select "Add new device".
- 2.3 Waiting for connecting to be 100%. Edit the name of your device completed.

