



Kyato

ECO

AER CONDITIONAT

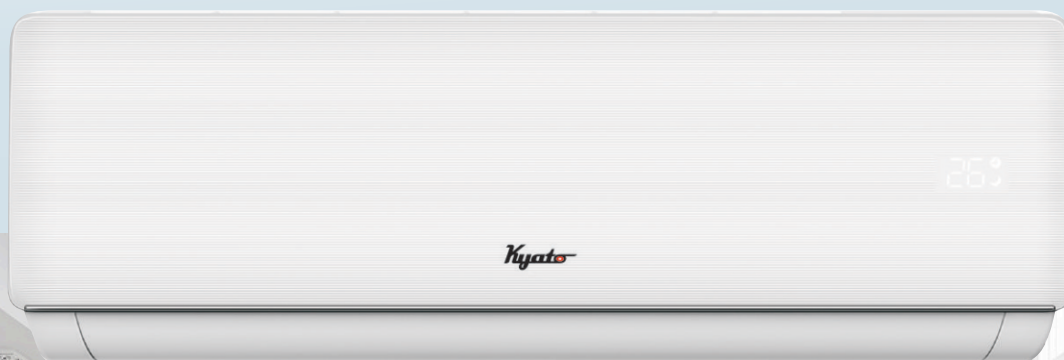

ECO FUNCTION



Filtru Ioni Argint
-optional-

Sterilizare
la 56°C

Auto -
Restart

A++/A+

I feel

Filter
Cleaning
Reminder


Wifi
Ready

LED
display

Funcție
I set

Funcție
Sleep

Inverter
R32

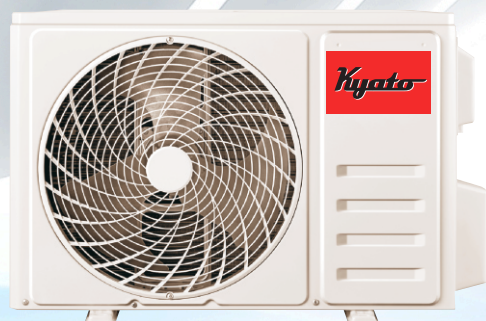

Model KYATO			Kyato-09R32 Xn	Kyato-12R32 Xn	Kyato -18R32 HC 1	Kyato -24R32 HC 1
			R32 9000Btu	R32 12000Btu	R32 18000Btu	R32 24000Btu
Capacitate racire		W	2600(940~3300)	3400(1000~3770)	5100(1250-5900)	6810(1830~7810)
Capacitate incalzire		W	2610(940~3360)	3420(1000~3810)	5130(1250-6080)	6870(1850~7930)
SEER		W/W	6.1	6.1	6.1	6.1
Clasa energetica pt racire			A++	A++	A++	A++
SCOP			4	4	4	4
Clasa energetica pt incalzire			A+	A+	A+	A+
Consum anual	Cooling	kwh/a	144	195	293	390
	Heating	kwh/a	735	840	1330	1680
Cantitate condens		L/h	1	1.2	1.5	1.8
Nivel zgomot U. Interioara	(H,M,L,Mute)	dB(A)	50/47/43/35/32	50/47/43/35/32	53/50/47/43/36	54/51/48/44/40
Nivel Zgomot U. Exterioara		dB(A)	60	60	65	67
Interior presiune sunet(H/M/L/Mute)		dB(A)	40/37/33/25/22	40/37/33/25/22	43/41/38//35/27	44/41/38/34/30
Exterior presiune sunet		dB(A)	50	50	53	54
Date electrice						
Alimentare			220-240V~/50Hz/1P	220-240V~/50Hz/1P	220-240V~/50Hz/1P	220-240V~/50Hz/1P
Interval voltaj		V	165~265	165~265	165~265	165~265
Operating current	Racire	A	4.6(1.2~8)	5.8(1.5~9)	8.1(1.7~12.0)	11.3(2.3~12.9)
	Incalzire	A	4.1(1.2~9)	4.7(1.5~10)	7.1(1.7~13.0)	9.7(2.3~13.7)
Putere consumata	Racire	W	800(240~1380)	1130(290~1500)	1579(330~2350)	2226(410~2800)
	Incalzire	W	699(240~1552)	922(290~1720)	1382(340~2540)	1903(420~3000)
Sistemul frigorific						
Refrigerant/Incarcare/GWP/CO2 echivalent			R32/0.45Kg	R32/0.49Kg	R32/0.92Kg	R32/1.06Kg
Compresor	Tip		Rotativ	Rotativ	Rotativ	Rotativ
			Rechi	Rechi	Sanyo	Sanyo
Volum aer interior Racire/Incalzire		m3/h	420/420	550/550	800/800	970/980
Intre unitati			4x0.75mm ²	4x0.75mm ²	4x1.0mm ²	4x1.0mm ²
Dispozitiv expansiune			Capilar	Capilar	Capilar	Capilar
Tevi Conexiune	Gaz	Inches	3/8"	3/8"	3/8"	1/2"
	Lichid	Inches	1/4"	1/4"	1/4"	1/4"
Altele						
Aria aplicabila		m ²	9~16	14~22	18~48	35~60
Lungime masima traseu		m	10	10	15	15
Diferenta max de inaltime		m	5	5	5	5
Temperatura de operare		grd C	16~31	16~32	16~33	16~34
Temperatura ambient	Exterior	grd C	Rac :-15-53/Inc :-15-30	Rac :-15-53/Inc :-15-30	Rac :-15-53/Inc :-15-30	Rac :-15-53/Inc :-15-30
(Racire / Incalzire)	Interior	grd C	Rac:17-32/Inc:0-30	Rac:17-32/Inc:0-30	Rac:17-32/Inc:0-30	Rac:17-32/Inc:0-30
Dimensiuni nete	Interior	mm	698x255x190	777x250x201	910x294x206	1010x315x220
(W x H x D)	Exterior	mm	712x276x459	712x276x459	853x602x349	920x699x380
Greutate neta	Interior	kg	6.5	7.5	10	13
	Exterior	kg	22	22	35	40