


Kyato

AER CONDITIONAT



ECO FUNCTION



Filtru Ioni Argint
-optional-

Sterilizare
la 56°C

Auto -
Restart

A++/A+

I feel

Filter
Cleaning
Reminder


Wifi

LED
display

Funcție
I set

Funcție
Sleep

Inverter
R32

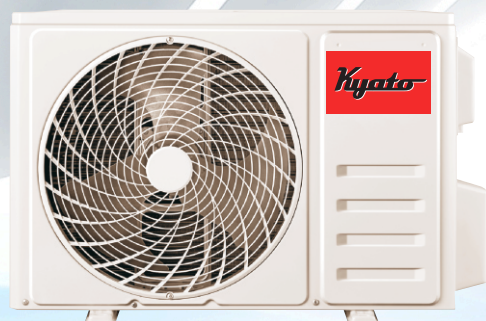

Model			Kyato-09 R32 Xn - Wi-Fi	Kyato-12 R32 Xn - Wi-Fi	Kyato-18 R32 HC32 -Wi-Fi	Kyato-24 R32 HC32 -Wi-Fi
			R32 9000Btu	R32 12000Btu	R32 18000Btu	R32 24000Btu
Capacitate racire		W	2600(940~3300)	3400(1000~3770)	5140(1250~5910)	7040(1500~7800)
Capacitate incalzire		W	2680(940~3200)	3420(1000~3810)	5210(1250~6070)	6200(1500~7900)
SEER		W/W	6.1	6.1	6.5	6.5
Clasa energetica pt racire			A++	A++	A++	A++
SCOP			4	4	4	4
Clasa energetica pt incalzire			A+	A+	A+	A+
Consum anual	Cooling	kwh/a	150	195	275	377
	Heating	kwh/a	700	770	1365	1715
Cantitate condens		L/h	1	1.2	1.5	1.8
Nivel zgomot U. Interioara	(H,M,L,Mute)	dB(A)	50/47/43/35/32	50/47/43/35/32	53/50/47/43/36	54/51/48/44/40
Nivel Zgomot U. Exterioara		dB(A)	62	62	65	67
Interior presiune sunet(H/ML/Mute)		dB(A)	40/37/33/25/22	40/37/33/25/22	43/41/38//35/27	44/41/38/34/30
Exterior presiune sunet		dB(A)	52	53	56	58
Date electrice						
Alimentare			220-240V~/50Hz/1P	220-240V~/50Hz/1P	220-240V~/50Hz/1P	220-240V~/50Hz/1P
Interval voltaj		V	165~265	165~265	165~265	165~265
Operating current	Racire	A	4.1(1.2~8)	5.8(1.5~9)	6.9(1.5~12.0)	9.6(1.8~12.6)
	Incalzire	A	3.6(1.2~9)	4.4(1.5~10)	6.2(1.6~13.0)	9.5(1.8~13.4)
Putere consumata	Racire	W	851(240~1380)	1130(290~1500)	1567(330~2350)	2166(390~2800)
	Incalzire	W	786(240~1552)	1005(290~1720)	1376(340~2550)	2112(390~3000)
Sistemul frigorific						
Refrigerant/Incarcare/GWP/CO2 echivalent			R32/0.49Kg	R32/0.52Kg	R32/0.96Kg	R32/1.14Kg
Compresor	Tip		Rotativ	Rotativ	Rotativ	Rotativ
			RECHI	GMCC	Sanyo	Sanyo
Volum aer interior Racire/Incalzire			m3/h	420/420	550/570	800/800
Intre unitati				4x0.75mm ²	4x0.75mm ²	4x1.0mm ²
Dispozitiv expansiune				Capilar	Capilar	Capilar
Tevi Conexiune	Gaz	Inches	3/8"	3/8"	3/8"	1/2"
	Lichid	Inches	1/4"	1/4"	1/4"	1/4"
Altele						
Aria aplicabila		m ²	9~16	14~22	18~48	35~60
Lungime masima traseu		m	10	10	15	15
Diferenta max de inaltime		m	5	5	5	5
Temperatura de operare		grd C	16-31	16-31	16-31	16-31
Temperatura ambient (Racire / Incalzire)	Exterior	grd C	Rac :-15-53/Inc :-20-30	Rac :-15-53/Inc :-20-30	Rac :-15-53/Inc :-20-30	Rac :-15-53/Inc :-20-30
	Interior	grd C	Rac: 17-32/Inc : 0-30	Rac: 17-32/Inc : 0-30	Rac: 17-32/Inc : 0-30	Rac: 17-32/Inc : 0-30
Dimensiuni nete (W x H x D)	Interior	mm	698x255x190	777x250x201	910x294x206	1010x315x220
	Exterior	mm	712x459x276	712x459x276	853x602x349	920x699x380
Greutate neta	Interior	kg	6.5	7	9.5	12
	Exterior	kg	19	20	30	38