


Geberit AP110 exposed cistern, stop-and-go flush

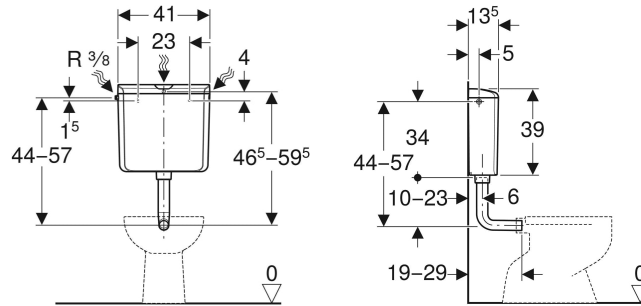

APPLICATION PURPOSES

- For low level installation

CHARACTERISTICS

- Low-noise
- Stop-and-go flush
- Insulated against condensation

- Water supply connection on the left/right or rear centre

Product material

ABS

TECHNICAL DATA

Flow pressure	0.1–10 bar
Storage temperature	≤ 40 °C
Flush volume, factory setting	9 l
Flush volume, adjustment range	6 / 9 l

SCOPE OF DELIVERY

- Reinforced braided hose 3/8"
- Flush bend 90° made of ABS, ø 50 / 44 mm, 23 x 23 cm
- Sleeve made of EPDM, ø 44 / 55 mm
- Fastening material

Art. no.	Colour / surface	B cm	H cm	T cm
136.610.11.1	white alpine	41	39	13.5