


Rainkit Sanisub 800



Sanisub 800 is a submersible pump for clear water for pumping flood water from living rooms or cellars. This pump can raise water up to 11 m with a particle size of 20 mm without the strainer by placing the pump on the feet provided. This lifting kit consists of 2 pumps to be mounted on a stainless steel frame. The pumps work alternately. The drains are pre-assembled.

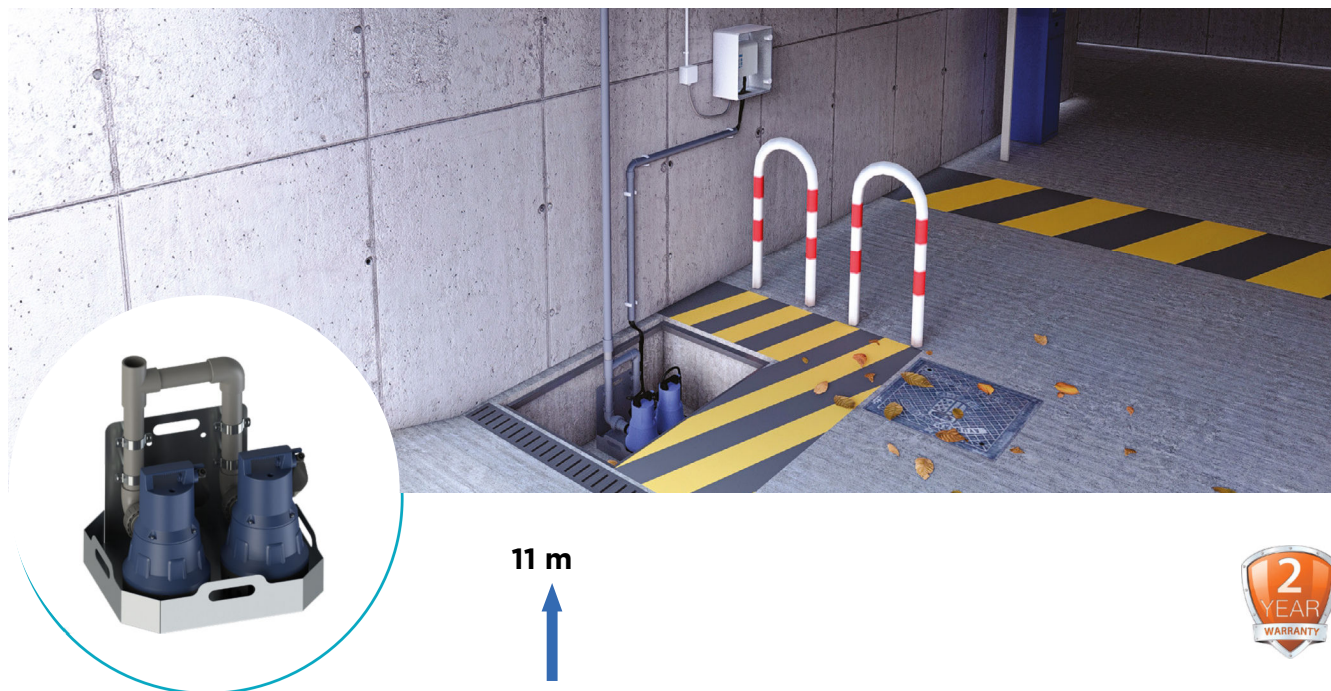

PERFORMANCES

- Max. head : 11 m
- Max. flow rate : 15 m³/h

PACK CONTAINS

Control box, PVC pipe, stainless steel frame, 2 pumps, alarm float

PRODUCT BENEFITS

- Particle size of 20 mm without the strainer by placing the pump on the feet provided
- Lift height of 11 m
- 2 Sanisub 800 pumps
- Alternating operation of the pumps
- Non-return valves integrated into the pumps
- Stainless steel frame with overflow filling
- Pre-assembled drains

DELIVERED AS STANDARD


Control box




Alarm float



CURVE

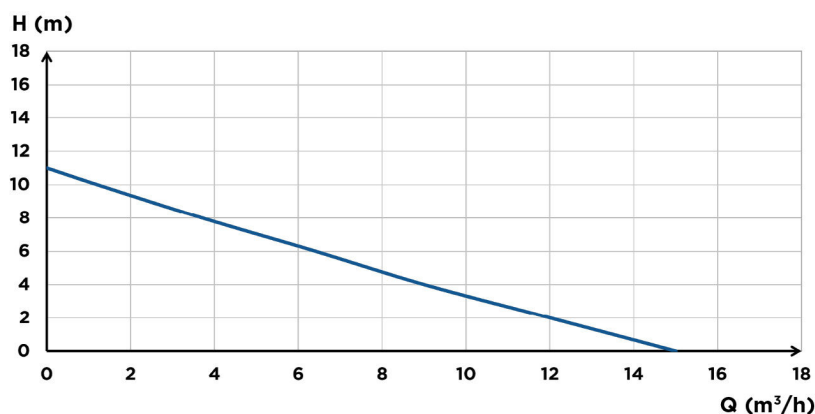

DIMENSIONS

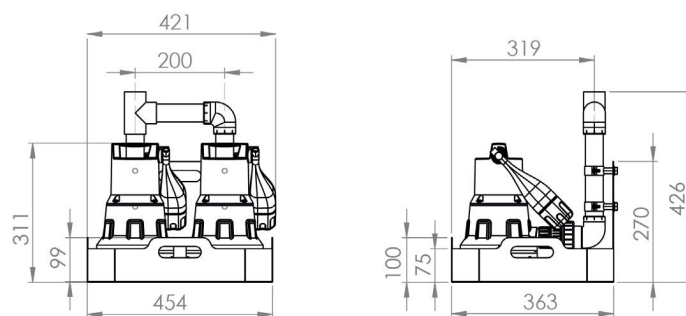

	Rainkit Sanisub 800
Type of activation	Float
Material	
Shaft	Stainless steel
Pump housing	PP GF
Waterproofing	NBR
Motor housing	Stainless steel
Impeller	PA 6 GF
Electrical features	
Tension (V)	230
Frequency (Hz)	50-60
Power consumption P1 (W)	800
Power output P2 (W)	600
RPM (revolution per minute)	2800
Electrical class	I
Immersion depth (m)	7
Power cable : Length (m)	10
Hydraulics	
Max. Head (Q0) (m)	11
Max. flow rate (m³/h)	15
Discharge diameter DN	40
Level ON/Level OFF (mm)	250/130
Particle size (mm)	20
Max. temperature of the pumped liquid (5 min)	70 °C
Type of impeller	Multi-channel
Identification and logistics	
Gross weight (kg)	18
EAN code	3308815096568
Product code	KITEPSUB015

SANISUB 800



Pump sold separately

Sanisub 800 is a submersible pump for clear water designed for pumping floodwaters from living spaces or basements. It can lift water up to 11 m. It activates automatically thanks to its integrated lever float. Versatile, it can be converted into a low-suction pump for residual water by using its removable strainer and locking the float for continuous operation.

3308815096308
SANISUB-015