



PV5E30B44		
Product		Crane Pendant Station
Type		5 Hole
Contact		1NC
Current	**Ie**	4A (250V AC)
Usage Category		AC15
Mechanical Life	**Min Qty**	1000000
Electrical Life	**Min Qty**	100000
Operating Frequency	**On-Off/Hour**	Mech. 900 Elec. 900
Insulation Voltage	**Ui**	300 V
Impulse Withstand Voltage	**Uimp**	2.5 kV
Dielectric Strength (Body-Contact)		2.500V AC
Dielectric Strength (Contact-Contact)		1.500V AC
Isolation Resistance		10 MΩ (500 V DC)
Operating Temperature		-15 / + 80 °C
Pollution Degree		3
Protection Degree		IP65
Contact Material		AgNi
Cable Section		1.5-2.5 mm2
Screw Torque		1.5Nm
Short Circuit Breaking Capacity	**Ics**	1kA
Serial		PV Series
Speed		Double Speed
1.Hole		Emergency Stop
Specifications	Aesthetic look and ergonomic usage with assistance of ABS reinforced material	
	Mechancial interlock	
	Single and double speed	
Standards / Certificates	TS EN 60947-5-1 UL 508 VDE 0660	

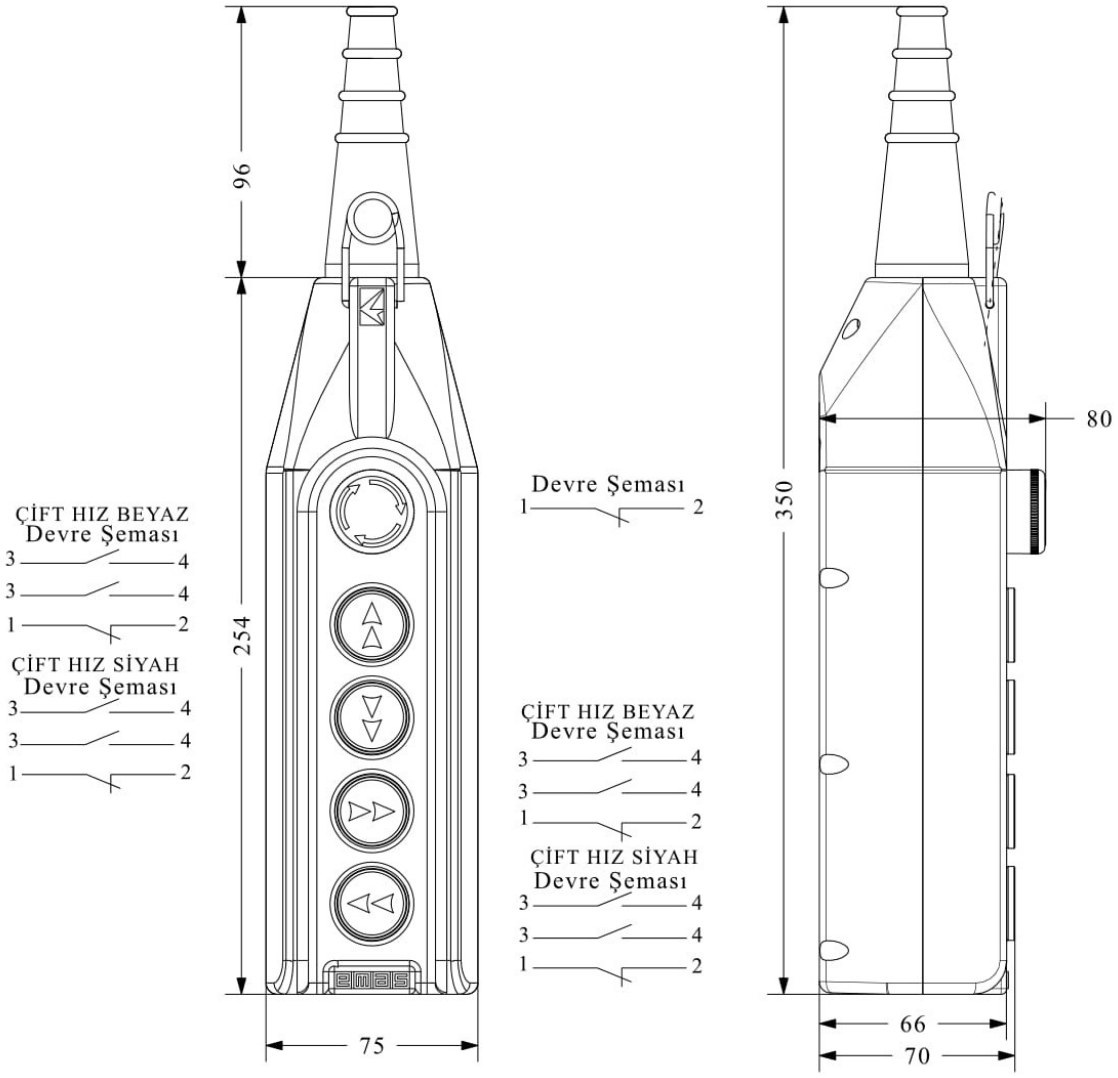

PV5E30B44


ÇİFT HIZ BEYAZ
Devre Şeması
3 4
3 4
1 2
ÇİFT HIZ SİYAH
Devre Şeması
3 4
3 4
1 2
96
254
75
Devre Şeması
1 2
ÇİFT HIZ BEYAZ
Devre Şeması
3 4
3 4
1 2
ÇİFT HIZ SİYAH
Devre Şeması
3 4
3 4
1 2
350
80
66
70