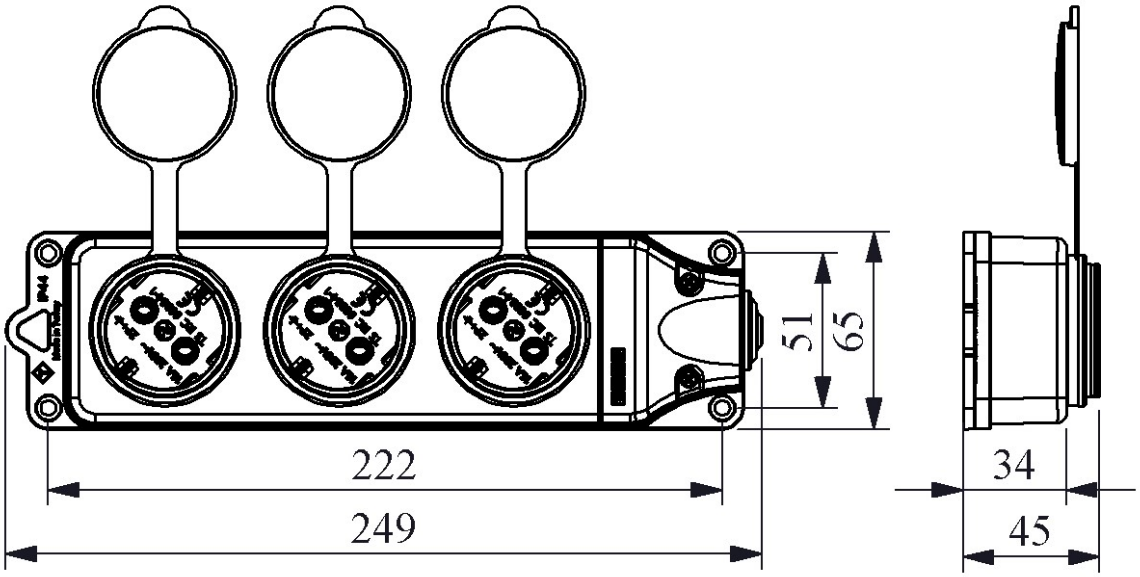


EKS116PG3		
Operating Current		16A
Product		Kauçuk Fiş Priz
Type		Group Socket
Contact		2P+E
Usage Category		AC15
Mechanical Life	**Min Qty**	≥ 5.000
Electrical Life	**Min Qty**	≥ 1.000
Operating Frequency	**On-Off/Hour**	Mech.240 Elec.120
Insulation Voltage	**Ui**	690V
Impulse Withstand Voltage	**Uimp**	2 kV
Dielectric Strength (Body-Contact)		1890V AC
Dielectric Strength (Contact-Contact)		2000V AC
Isolation Resistance		10 MΩ MİN. (500 V DC)
Operating Temperature		-40 / +80 °C
Pollution Degree		2
Protection Degree		IP44
Number of Cable and Cable Section		3*1,5 mm2
Production Time		31.12.1899 00:00:00
Serial		EKS Series
Specifications	Monoblock durable rubber plastic housing	
Standards / Certificates	TS IEC 60884-1-A1+A2	


51
65
222
249
34
45