

Pistol pneumatic 1/2"

1561



0



Caracteristicile produsului

- viteza de rotatie 8000 rot/min
- Moment de torsiune max. 814 Nm
- Presiunea maxima de aer comprimat: 6,2 Bar
- Consum de aer comprimat 113 l/min
- Racord de aer 1/4"
- Diametrul maxim de strangere M16

Profile



Avantaje:


- moment de torsiune controlat
- insurubare rapida
- o diversitate de utilizari

Utilizare:

- industria auto
- industria aerospatiala
- echipament agricol
- industria grea
- constructia de masini
- industria de constructii navale
- montari individuale

Important

- Folositi intotdeauna capetele chei tubulare de impact UNIOR

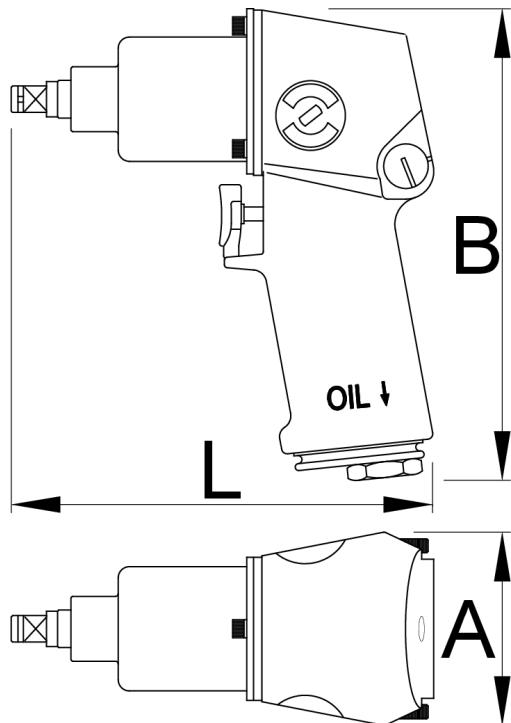

		L	A	B		
--	--	---	---	---	--	--

615322

1/2"


188

70

190

814

2910

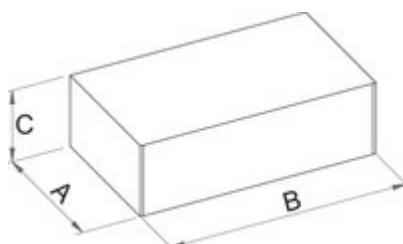

Ambalaj pentru retail

	MB	MA	MB	MC	
--	----	----	----	----	--

615322

190

220

190

80

2980

Ambalaj pentru transport