

Stubby impact wrench

1563



Usage




Profiles

Product features

- free speed 8000 revolution per minutes
- max. torque 745 Nm
- recommended air pressure: 6,2 Bar
- air consumption 164 l/min
- air inlet 1/4"
- noise level 104dB(A)

Advantages:

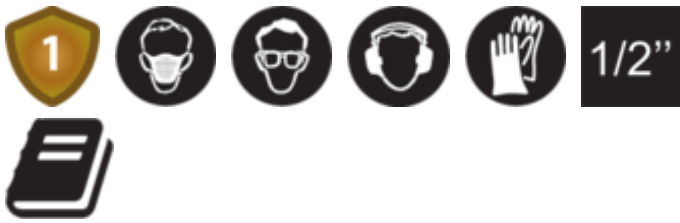


- composite motor housing
- handle exhaust (silencer)
- one hand forward / reverse
- compact and powerful
- jumbo hammer mechanism

Usage:

- car industry
- aircraft industry
- agricultural equipment
- heavy industry
- larger construction machinery
- shipbuilding industry
- individual mounting

Important!

- Always use Unior IMPACT sockets.

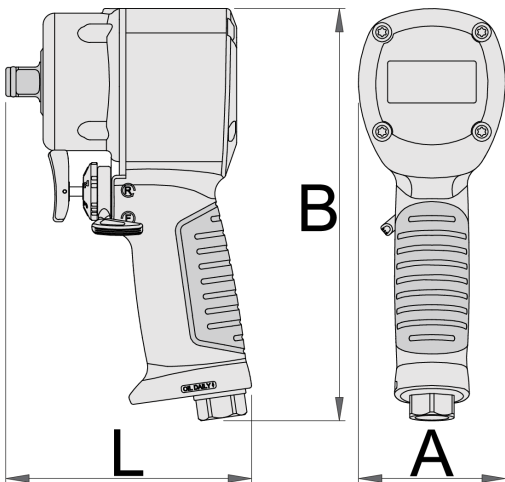

		L	A	B		
627568	1/2"	105,4	63	177	745	1329

Retail packaging

	MA	MB	MC	
627568				

Transport packaging

		TA	TB	TC	