


Impact wrench

1566



Usage

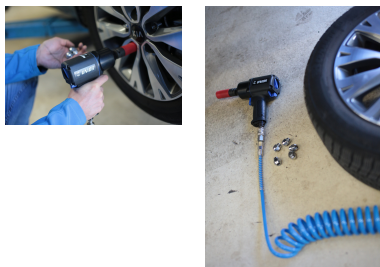

Profiles



Product features

- free speed 8000 revolution per minutes
- max. torque 1223 Nm
- .
- recommended air pressure: 6,2 Bar
- air consumption 113 l/min
- air inlet 1/4"
- noise level 93 dB(A)

Advantages:

- composite motor housing
- twin hammer mechanism
- one hand forward / reverse
- compact and powerful

- variable speed trigger

Usage:

- car industry
- aircraft industry
- agricultural equipment
- heavy industry
- larger construction machinery
- shipbuilding industry
- individual mounting

Important!

- Always use Unior IMPACT sockets.

		L	A	B		
627570	1/2"	187	70	193	1223	2227

Retail packaging

	MA	MB	MC	
627570				

Transport packaging

		TA	TB	TC	
627570					