

KL-1000-20 A

KN 9.16

King Pin Press (65t), with Sleeve Set

Universally suitable for use on HGVs.

Designed for the quick and professional pressing out/pressing in of king pins found on HGVs.

The king pin press with its adjustable press frame has been developed and adapted to satisfy the latest safety requirements. Thanks to its compact and ingenious design, the king pin press not only saves a lot of time but also allows for easy and, above all, safe operation.

The heavy-duty 65t hydraulic cylinder with integrated hand pump and the pneumatic quick-stroke 'extend/retract' valve enable even severely seized king pins to be extracted with ease.


Technical Data:

Press capacity:	65t
Clear width between threaded bolts:	290mm
Clear height (max.):	480mm
Stroke:	120mm
Nominal pressure:	420bar
Compressed air connection:	max. 13bar
Weight:	approx. 130kg
Oil fill volume:	approx. 3.5 litre

Scope of Delivery:

Pos.	Part No.	Description	Qty
-	KL-1000-20 A	King Pin Press (65t), with Sleeve Set	1
	composed of:		
1	KL-1000-200	King Pin Press (65t), without Sleeve Set	1
2	KL-1000-230 A	Sleeve Set	1
15	KL-1000-2690	Open-End Spanner, Size (waf) 50mm	1

Pos.	Part No.	Description	Qty
-	KL-1000-230 A	Sleeve Set	1
	composed of:		
3	KL-1000-2621-1	Mandrel, Ø 21.5mm, length 95mm	1
4	KL-1000-2630-1	Mandrel, Ø 30mm, length 95mm	1
5	KL-1000-2634-1	Mandrel, Ø 34mm, length 95mm	1
6	KL-1000-2621-2	Mandrel, Ø 21.5mm, length 185mm	1
7	KL-1000-2630-2	Mandrel, Ø 30mm, length 185mm	1
8	KL-1000-2634-2	Mandrel, Ø 34mm, length 185mm	1
9	KL-1000-2621-3	Mandrel, Ø 34mm, length 185mm	1
10	KL-1000-2630-3	Mandrel, Ø 30mm, length 275mm	1
11	KL-1000-2890	Support Ring, Ø 90mm	1
12	KL-1000-2863	Support Ring, Ø 63mm	1
13	KL-1000-2290	Spacer Ring, Ø 70.5mm, for bridge	1
14	KL-1000-2758	Thrust Piece, Ø 58mm	1

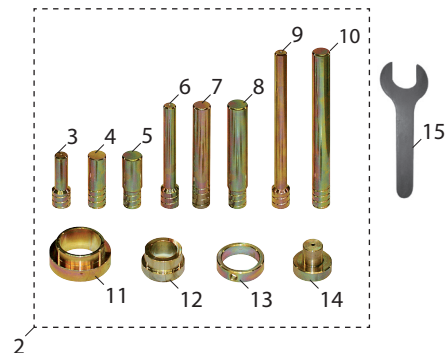

Made in Germany

Advantages:

- › Developed in accordance with the latest safety standards and requirements.
- › Universal use – in situ on the vehicle as well as in a free-standing position.
- › Saves a lot of time.
- › Universally adjustable press frame can be rotated 180°.
- › The three-axe quick adjustment mechanism allows for the quick and easy positioning of the press on the vehicle.