WHEEL HUB PULLER, MECHANICAL



















- For a bolt circle dia. at the hub of 10x120, 10x122, 10x143, 10x165, 10x168, 10x225, 12x144, 12x145, 12x164, 12x168, 14x138, 14x144 mm
- For professional pulling of wheel hub/bearing units
- A hydraulic drive with 28 t cylinder is also possible (accessories required)

Suitability: Universal

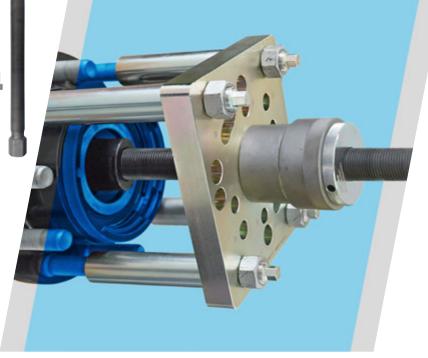

Code	No.	Max. load (tool kit)	Bolt circle hub	Pitch circle hub wheel hub for low-loaders
3418596	KL-1005-111 Z	28 t	10x120, 10x122, 10x143, 10x165, 10x168, 12x144, 12x145, 12x164, 12x168, 14x138, 14x144	10x225

KL-1005-100 A Z

WHEEL HUB PULLER SETS, MECHANICAL
















Universal fit for commercial vehicles (as well as wheel hubs with integrated compact wheel bearing) with removable hub cap.

- For axle systems with a pitch hole diameter of 8x275 mm and 10x335 mm for BPW, SAF, and ZF
- For professional removal of the wheel hub directly on the vehicle
- A hydraulic drive with 28 t cylinder is also possible (accessories required)

Suitability: MERCEDES MAN RENAULT

VOLVO IVECO SCANIA

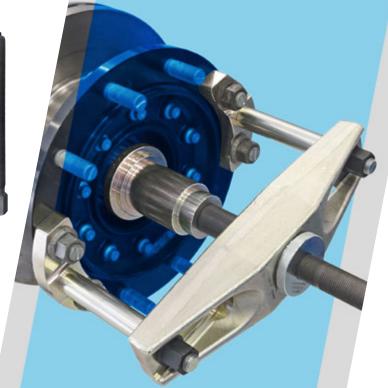

Code	No.	Hole circle Ø	Max. load on tool kit	Axle systems
3418588	KL-1005-100 A Z	8 x 275 mm / 10 x 335 mm	28 t	BPW, SAF, ZF