




JACKING BEAMS

SJ3T-A

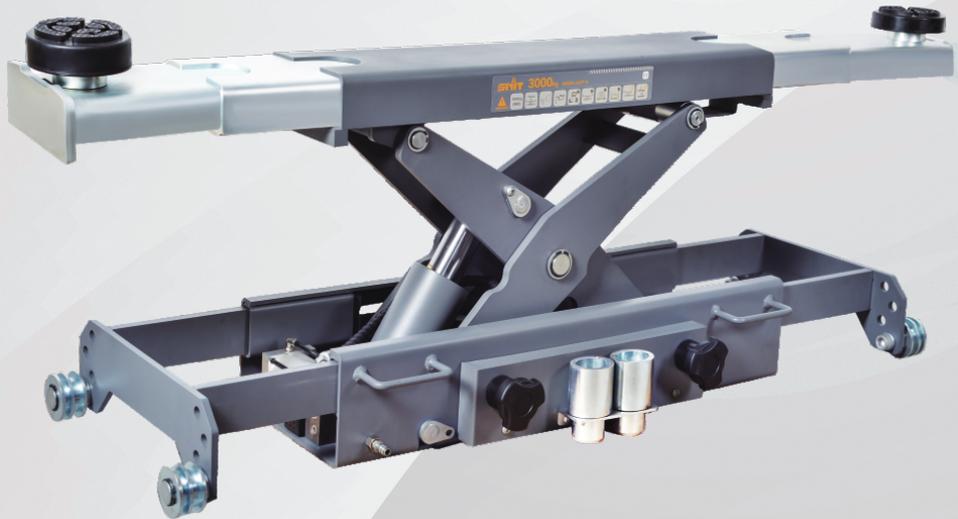

Flexible top support beam can be extended and the screw extension added on the beam is also adjustable



Unique height adjustable support arm system, designed to fit all lifts




Two-hand lowering operation with automatic safety locking device and overload valve for optimum safety



Various adaptors for options

Model	Capacity	Working Air Pressure	Net Weight	Packing Size	Stroke	Telescopic Arms Width	Depth	Min Height	Max Height
SJ3T-A	3000kgs	0.75-1.2Mpa	159kgs	95.5×53×36cm	270mm	780-1610mm	445mm	252mm	522mm

SJ3T-A

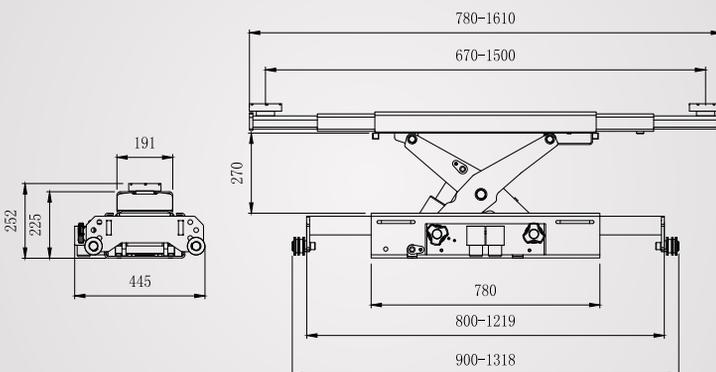

Features

- Strong design makes it ideal for lifting different heavy vehicles
- Pump with two speeds action function
- Flexible top support beam can be extended to 1610mm
- Unique height adjustable support arm system, designed to fit all lifts
- Low closed height of only 252mm
- Hard chrome plated piston rod for long life
- Saddles with screw extension and cup-shaped adaptors are standard accessories
- Various adaptors for lifting different parts.