

Equipment suitable for the nebulisation of low density lubricating oils, detergents, sterilizers, and so on. When they are filled with liquid for 3/4 of their capacity and air is put inside at 6-8 bar they work automatically without any continuous link to compressed air.

They are suitable for the washing of mechanical parts and items in general. The air-operated working at low pressure (max 0,5 bar) allows the washing with brush with continuous flux, or the washing of the items plunged in the liquid directly in the tank. The lid can be removed and so it is possible to work better.



Equipment suitable for the nebulisation of low density lubricating oils, detergents, sterilizers, and so on. When they are filled with liquid for 3/4 of their capacity and air is put inside at 6-8 bar they work automatically without any continuous link to compressed air.

They are suitable for the washing of mechanical parts and items in general. The air-operated working at low pressure (max 0,5 bar) allows the washing with brush with continuous flux, or the washing of the items plunged in the liquid directly in the tank. The lid can be removed and so it is possible to work better.





AISI 304-316 STAINLESS STEEL PRESSURE SPRAYERS

page 260



VARNISHED PRESSURE SPRAYERS

page 261



AISI 304-316 STAINLESS STEEL PRESSURE SPRAYERS
WITH FOAMING DEVICE

page 262



VARNISHED PRESSURE SPRAYERS WITH FOAMING DEVICE

page 263



ACCESSORIES FOR PRESSURE SPRAYERS

page 264



LEATHER SQUEEZER

page 266



WASHING COLLECTOR

page 266



050-1508-000

Art. 050-1508-000

AISI 304 stainless steel pressure sprayer 16 l

Tank capacity 16 l with lever indicator

Equipped with:


Art.053-1537-000 10 m RILSAN spring hose

Art.053-1541-000 Spray gun with 600 mm stainless steel pipe

Manometer with stainless steel case



050-1508-000	9,600	0,074	1
--------------	-------	-------	---



050-1510-000

Art. 050-1510-000

AISI 304 stainless steel pressure sprayer 24 l

Tank capacity 24 l with lever indicator

Equipped with:


Art.053-1537-000 10 m RILSAN spring hose

Art.053-1541-000 Spray gun with 600 mm stainless steel pipe

Manometer with stainless steel case



050-1510-000	9,900	0,074	1
--------------	-------	-------	---



050-1511-000

Art. 050-1511-000

AISI 316 stainless steel pressure sprayer 24 l

Ideal for chemical products

Tank capacity 24 l with lever indicator

Equipped with:

Art.053-1537-000 10 m RILSAN spring hose

Art.053-1541-000 Spray gun with 600 mm stainless steel pipe


Manometer with stainless steel case

AISI 316 stainless steel connections

Viton seals



050-1511-000	9,700	0,074	1
--------------	-------	-------	---



050-1515-000

Art. 050-1515-000

AISI 304 stainless steel pressure sprayer 50 l

Tank capacity 50 l with lever indicator

Equipped with:


Art.053-1537-000 10 m RILSAN spring hose

Art.053-1541-000 Spray gun with 600 mm stainless steel pipe

Manometer with stainless steel case



050-1515-000	20,000	0,196	1
--------------	--------	-------	---



Equipment suitable for the nebulisation of low density lubricating oils, detergents, disinfectants, and so on. When they are filled with liquid for 3/4 of their capacity and air is put inside at 6-8 bar they work automatically without any continuous link to compressed air.

ATTENTION! Do not use inflammable and corrosive liquids.

Art. 050-1520-000

Varnished steel pressure sprayer 24 l


Tank capacity 24 l with lever indicator

Equipped with:

Art.053-1537-000 10 m RILSAN spring hose

Art.053-1541-000 Spray gun with 600 mm stainless steel pipe

			
050-1520-000	11,500	0,074	1



050-1520-000

Art. 050-1525-000

Varnished steel pressure sprayer 50 l


Tank capacity 50 l with lever indicator

Equipped with:

Art.053-1537-000 10 m RILSAN spring hose

Art.053-1541-000 Spray gun with 600 mm stainless steel pipe

			
050-1525-000	22,800	0,196	1



050-1525-000

Art. 050-1530-000

Varnished steel pressure sprayer 100 l


Tank capacity 100 l with lever indicator

Equipped with:

Art.053-1537-000 10 m RILSAN spring hose

Art.053-1542-000 Spray gun with 750 mm stainless steel pipe

			
050-1530-000	39,100	0,360	1



050-1530-000

Equipment suitable for the nebulisation of low density lubricating oils, detergents, disinfectants, and so on. When they are filled with liquid for 3/4 of their capacity and air is put inside at 6-8 bar they work automatically without any continuous link to compressed air.

ATTENTION! Do not use inflammable and corrosive liquids.

STAINLESS STEEL PRESSURE SPRAYERS WITH FOAMING DEVICE



051-1512-000

Art. 051-1512-000

AISI 304 stainless steel pressure sprayer 24 l

With foaming device

Tank capacity 24 l with lever indicator

Equipped with:

Art.053-1538-000 8x13 8 m length pvc hose

Art.053-1541-000 Spray gun with 600 mm stainless steel pipe


Art.053-1552-000 Thermoplastic fan nozzle for foaming 16,8 l/min

Art.053-1554-000 Foaming coupler super

Manometer with stainless steel case



051-1512-000	11,200	0,074	1
---------------------	--------	-------	---



051-1513-000

Art. 051-1513-000

AISI 316 Stainless steel pressure sprayer 24 l

With foaming device

Ideal for corrosive liquids and chemical products

Tank capacity 24 l with lever indicator

Equipped with:

Art.053-1538-000 8x13 8 m length pvc hose

Art.053-1541-000 Spray gun with 600 mm stainless steel pipe

Art.053-1552-000 Thermoplastic fan nozzle for foaming 16,8 l/min

Art.053-1554-000 Foaming coupler super


Manometer with stainless steel case

AISI 316 stainless steel connections

Viton seals



051-1513-000	10,700	0,074	1
---------------------	--------	-------	---



051-1517-000

Art. 051-1517-000

AISI 304 stainless steel pressure sprayer 50 l

With foaming device

Tank capacity 50 l with lever indicator

Equipped with:

Art.053-1538-000 8x13 8 m length pvc hose

Art.053-1541-000 Spray gun with 600 mm stainless steel pipe


Art.053-1552-000 Thermoplastic fan nozzle for foaming 16,8 l/min

Art.053-1554-000 Foaming coupler super

Manometer with stainless steel case



051-1517-000	21,000	0,196	1
---------------------	--------	-------	---



Equipment suitable for the nebulisation of detergents with foaming device. When they are filled with liquid for 3/4 of their capacity and air is put inside at 6-8 bar they work automatically without any continuous link to compressed air.

ATTENTION! Do not use inflammable and corrosive liquids.

VARNISHED STEEL PRESSURE SPRAYERS WITH FOAMING DEVICE



Art. 051-1522-000

Varnished steel pressure sprayer 24 l

With foaming device

Tank capacity 24 l with lever indicator

Equipped with:

Art.053-1538-000 8x13 8 m length pvc hose


Art.053-1541-000 Spray gun with 600 mm stainless steel pipe

Art.053-1552-000 Thermoplastic fan nozzle for foaming 16,8 l/min

Art.053-1554-000 Foaming coupler super



051-1522-000	12,400	0,074	1
--------------	--------	-------	---



051-1522-000

Art. 051-1527-000

Varnished steel pressure sprayer 50 l

With foaming device

Tank capacity 50 l with lever indicator

Equipped with:

Art.053-1538-000 8x13 8 m length pvc hose


Art.053-1541-000 Spray gun with 600 mm stainless steel pipe

Art.053-1552-000 Thermoplastic fan nozzle for foaming 16,8 l/min

Art.053-1554-000 Foaming coupler super



051-1527-000	23,900	0,196	1
--------------	--------	-------	---



051-1527-000

Art. 051-1532-000

Varnished steel pressure sprayer 100 l

With foaming device

Tank capacity 100 l with lever indicator

Equipped with:

Art.053-1538-000 8x13 8 m length pvc hose


Art.053-1542-000 Spray gun with 750 mm stainless steel pipe

Art.053-1552-000 Thermoplastic fan nozzle for foaming 16,8 l/min

Art.053-1554-000 Foaming coupler super



051-1532-000	39,700	0,360	1
--------------	--------	-------	---



051-1532-000

Equipment suitable for the nebulisation of detergents with foaming device. When they are filled with liquid for 3/4 of their capacity and air is put inside at 6-8 bar they work automatically without any continuous link to compressed air.

ATTENTION! Do not use inflammable and corrosive liquids.



053-1537-000

Art. 053-1537-000

10 m length RILSAN spring hose 6X8
1/4" M fitting



053-1538-000

Art. 053-1538-000

20 bar 8x13 8 m length pvc hose
Bayonet connection



053-1541-000

Art. 053-1541-000

Spray gun with 600 mm stainless steel pipe
Equipped with:
Stainless steel pipe 600 mm length
Gun with body P.P. reinforced with F.V
Stainless steel AISI 316 ball
Stainless steel internal parts and viton seals
110° fan nozzle Ø hole 1,1
50 Mesh stainless steel cup filter

053-1542-000

Art. 053-1542-000

Spray gun with 750 mm stainless steel pipe
Composed like Art.053-1541-000 but with:
Stainless steel pipe 750 mm

053-1544-000

Art. 053-1544-000

Spray gun with 900 mm stainless steel pipe
Composed like Art.053-1541-000 but with:
Stainless steel pipe 900 mm

053-1545-000

Art. 053-1545-000

Telescopic spray gun with stainless steel pipe from 1 m to 2 m
Composed like Art.053-1541-000 but with:
Adjustable stainless steel telescopic spray
gun from 1 m min to 2 m max length



024-1232-P65

Art. 024-1232-P65

Water dispensing nozzle RB65 blu 1/2"
Adjustable jet brass shaft
Brass swivel joint F1/2" G
Pressure max 24 bar
Temperature max 90°C

Art. 053-1546-000

110° thermoplastic (POM) fan nozzle Ø hole 0,9
Yellow color



053-1546-000

Art. 053-1547-000

110° thermoplastic (POM) fan nozzle Ø hole 1,1
Blue color



053-1547-000

Art. 053-1548-000

110° thermoplastic (POM) fan nozzle Ø hole 1,3
Red color



053-1548-000

Art. 053-1550-000

110° thermoplastic (POM) fan nozzle Ø hole 1,8
White color



053-1550-000

Art. 053-1552-000

Thermoplastic fan nozzle for foaming
Delivery capacity 3 bar 16,8 l/min
Brown color



053-1552-000

Art. 053-1553-000

Stainless steel fan nozzle for foaming
Delivery capacity 3 bar 9,8 l/min



053-1553-000

Art. 053-1554-000

Thermoplastic super foaming coupler
Red color



053-1554-000

Art. 053-1555-000

Stainless steel cup filter 50 Mesh



053-1555-000

Art. 053-1560-000

Thermoplastic nozzle holder protection fitting
Red color



053-1560-000

Art. 054-1556-000

Wall-mounted leather squeezer


With galvanized support angle brackets



054-1556-000



054-1556-000	8,700	0,040	1
--------------	-------	-------	---



These articles are essential in car washings in order to make it easy and improve the drying of vehicles with leather or synthetics clothes.



055-1560-000

Art. 055-1560-000

Washing collector with wheeled tank 65 l

Collector capacity 50 l with removable lid

Tank capacity 65 l

Max pressure use 0,5 bar

Equipped with:


Filter and grate of decantation

Blowing nozzle with spiral hose

Brush with nylon bristles with 1,5 m length pvc hose



055-1560-000	43,100	0,300	2
--------------	--------	-------	---



057-1563-000

Art. 057-1563-000

Brush with nylon bristles for washing collector

For the washing of mechanical parts and items in general. The air-operated working at low pressure (max 0,5 bar) allows the washing with brush with continuous flux, or the washing of the items plunged in the liquid directly in the tank. For a correct use, spill 48-52 l of detergent liquid. The lid can be removed and so it is possible to work better.

WARNING!

Do not use inflammable or corrosive liquids or substances that emanate toxic vapors.

Use exclusively specific chemical products for the washing of mechanical parts, to use only according to regulation furnished by the manufacturer.





They are suitable for service stations and garages, for checking and re-establishing the tyre pressure through the inflating valve and discharge with lever in the version with automatic charge, with the inflating gun in the version with manual charge.



They are suitable for service stations and garages, for checking and re-establishing the tyre pressure through the inflating valve and discharge with lever in the version with automatic charge, with the inflating gun in the version with manual charge.





TYRE INFLATORS WITH AUTOMATIC CHARGE

page 272



TYRE INFLATORS WITH MANUAL CHARGE

page 273



WHEELED TYRE INFLATORS WITH MANUAL CHARGE

page 273



SWIVELLING CLOSED HOSE REEL TO INFLATE TYRES

page 274



ACCESSORIES FOR TYRE INFLATORS

page 274

PORTABLE TYRE INFLATORS WITH AUTOMATIC CHARGE



060-1582-000

Art. 060-1582-000

Approved CEE tyre inflator 12 l

with automatic charge

Tank capacity 12 l

Equipped with:


Approved gauge Ø 80 with scale 0-10 bar

1,20 m rubber hose with double clip-on connector

Art.063-1586-000 Automatic charger



060-1582-000	11,100	0,074	1
--------------	--------	-------	---



060-1583-000

Art. 060-1583-000

Approved CEE portable tyre inflator 12 l

with automatic charge with support

Tank capacity 12 l

Equipped with:


Approved gauge Ø 80 with scale 0-10 bar

1,20 m rubber hose with double clip-on connector

Support with automatic charger



060-1583-000	13,100	0,136	1
--------------	--------	-------	---



063-1586-000

Art. 063-1586-000

Automatic charger for tyre inflators

Connection M 1/2" G

Technical data		060-1582-000	060-1583-000
Max pressure tank	bar	10	10
Max working pressure	bar	8	8
Calibrated safety	bar	10	10
Approved CE Ø 80 gauge	bar	0-10	0-10

They are suitable for service stations and garages, for checking and re-establishing the tyre pressure through the inflating and deflating valve lever. They have automatic charge in order to be ready for use. The operation of inflation and deflation of the tyres will be carried out through a unique three positions lever. To have the tyre inflator ready for use it is enough to put it on the automatic charger installed on the line of the compressed air.

NOTE: APPROVED FOR PUBLIC USE

Art. 061-1590-000

Portable tyre inflator with manual charge 12 l

Tank capacity 12 l

Equipped with:

Reading gauge Ø 50 mm 0-10 bar

Art.063-1596-000 5 m RILSAN spring hose

Art.063-1597-000 Inflating gun with Ø 63 gauge

Art. 061-1591-000

Portable tyre inflator with manual charge 12 l

Like art.061-1590-000 but with:

Art.063-1598-A00 Michelin approved inflating gun with Ø 80 gauge



061-1591-000

Art. 061-1594-000

Wheeled tyre inflator with manual charge 24 l

Tank capacity 24 l

Equipped with:

Reading gauge Ø 80 mm 0-10 bar

Art.063-1596-000 5 m RILSAN spring hose

Art.063-1597-000 Inflating gun with Ø 63 gauge

Art. 061-1595-000

Wheeled tyre inflator with manual charge 24 l


Like art.061-1594-000 but with:

Art.063-1598-A00 Michelin approved inflating gun with Ø 80 gauge



061-1595-000

				
061-1590-000	7,550	0,081	1	
061-1591-000	7,800	0,081	1	
061-1594-000	11,500	0,074	1	
061-1595-000	11,600	0,074	1	

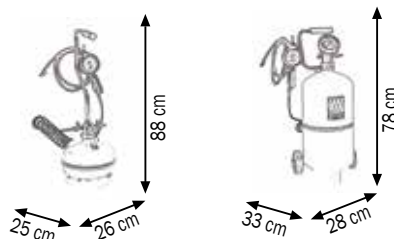

Technical data		061-1590-000	061-1591-000	061-1594-000	061-1595-000
Max pressure tank	bar	10	10	10	10
Max working pressure	bar	8	8	8	8
Calibrated safety valve	bar	10	10	10	10
Approved CE Ø 80 gauge	bar	0-10	0-10	0-10	0-10

They are necessary in service stations and garages, for checking and re-establishing the tyre pressure through the inflating gun with gauge scale 0–10 bar.



063-1596-000

Art. 063-1596-000

5 m RILSAN spring hose
1/4 "M bayonet fitting connection



063-1597-000

Art. 063-1597-000

Inflating gun with Ø 63 gauge
Scale 0-10 bar + 0-140 PSI
Rubber gauge-cover
Flexible hose 0,40m with coupler



063-1598-000

Art. 063-1598-000

Approved inflating gun with Ø 80 gauge,
approved to European Directive 2011/17/UE
Scale 0-10 bar
Rubber gauge-cover
Flexible hose 0,40m with coupler



063-1598-A00

Art. 063-1598-A00

Michelin approved inflating eurodair gun with Ø 80 gauge
approved to European Directive 2011/17/UE
Scale 0,7-12 bar/PSI
Rubber gauge-cover
Flexible hose 1,50m with coupler



063-1599-000

Art. 063-1599-000

Angle head connector for twin tyres
Flexible hose 0,80m with coupler



063-1581-000

Art. 063-1581-000

Swiveling closed hose reel for inflating tyres

Equipped with:

Art.075-4301-211 Swiveling closed hose reel with hose PU 8x13 20 bar 11 m

Art.063-1598-A00 Michelin approved inflating eurodair gun with Ø 80 CEE gauge

It is equipped with a wall-fixing bracket which makes the wall fixing easier.
The connection of the hose reel to the wall-fixing bracket is very fast and it allows a quick connection and disconnection.

The continuous connection to the compressed air system makes the system of inflation ready to use.



063-1581-000 13,800 0,026 1