

Product family: Terminal blocks - For free connections


Item code: 991, 992, 9924, 993, 994, 995

Description: ONE-WAY TERMINAL BLOCKS · END CONNECTORS · BARS

Image



Technical drawing

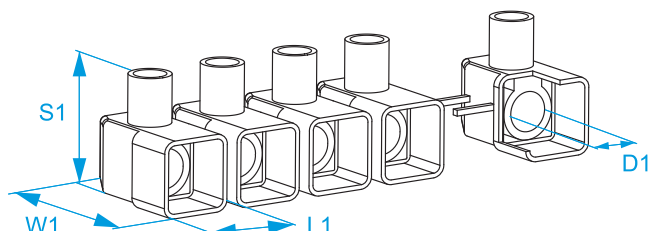

Specifications

INSULATING HOUSING: transparent polycarbonate (PC) UL 94 V0

CONDUCTIVE BODY: brass

CAPTIVE SCREW IN: galvanized steel

INSULATION SELF-EXTINGUISHING: EN 60335-1: 2002+A2:2006 (par. 30.2.3), EN 60695-2-10 a 850 °C, EN 60695-2-11

CONDUCTOR TYPE: rigid and flexible

MAX OPERATING TEMPERATURE: 85 °C

PROTECTION GRADE: IP20

ACCORDING TO STD.: EN 60998-1: 2004, EN 60998-2-1: 2004

Code	Conductor section (mm ²)	Connection capability Section (mm ²)	Connection capability N. rigid conductors	Connection capability N. flexible conductors	Rated voltage (V)	Test current (A)	Screw	D1 (mm)	L1 (mm)	W1 (mm)	S1 (mm)		
991	1.5	1.5 1 0.75	2 2 ÷ 3 2 ÷ 4	2 2 ÷ 3 2 ÷ 4	450	18	M3	3,1	7,5	15	14,5	10	10/1000
992	2.5	2.5 1.5 1	2 2 ÷ 3 2 ÷ 4	2 2 ÷ 3 2 ÷ 4	450	24	M3.5	4,1	9	17,5	18,2	10	10/600
9924	4	4 2.5 1.5	2 2 ÷ 3 2 ÷ 4	2 2 ÷ 3 2 ÷ 4	450	32	M4	4,5	10,3	21	20	10	10/400
993	6	6 4 2.5	2 2 ÷ 3 2 ÷ 4	2 2 2 ÷ 4	450	41	M4	6	11,8	22,5	23	10	10/300
994	10	10 6 4	2 2 ÷ 3 2 ÷ 4	2 2 2 ÷ 4	450	57	M6	7,9	14,7	26	26	10	10/200
995	16	16 10 6	2 2 ÷ 3 2 ÷ 4	2 2 2 ÷ 3	450	76	M8	10,5	18,8	31,8	32,2	10	8/80

