

*ETITEC V T2 255/20 1+1



Specifications

ETI Code	002442954
Description	*ETITEC V T2 255/20 1+1
Class name	Surge arrester
Type	T2
AC max continuous operating voltage Uc	255V
In 8/20 (kA)	20kA
Up - Voltage protection level (kV)	1.5kV
Leakage current	YES
Applied technology	MOV
Remote signalisation	NO
Network system	TT/TN-S
Number of modules	2
Built-in depth (mm)	68mm
function	SPD
Catalogue Group	ETITEC V

Online product page 

Other documentation




- Technical data catalogue
- 3D Model
- 2D File
- Instruction manual
- CE declaration
- Eplan file

ETIM international clasification

Classification	EC000941
Class name	Surge protection device for power supply systems
System configuration DC	No
System configuration IT	No
System configuration TN-C	No
System configuration TN-S	Yes
System configuration TT	Yes
System configuration other	No
Nominal discharge surge current (8/20)	20kA
Nominal voltage AC	230V
Short-circuit breaking capacity (I _{sc})	25kA
Max. continuous voltage AC	255V
Max. discharge surge current (8/20)	40kA
Mounting method	DIN rail (top hat rail) 35 mm
Max. conductor cross section solid (solid, stranded)	35mm ²
Max. conductor cross section flexible (fine-strand)	25mm ²
With remote signalling contact	No
Integrated backup fuse	No
Signalling at the device	Optical
Category type 2	Yes
Degree of protection (IP)	IP20

Dimension drawing

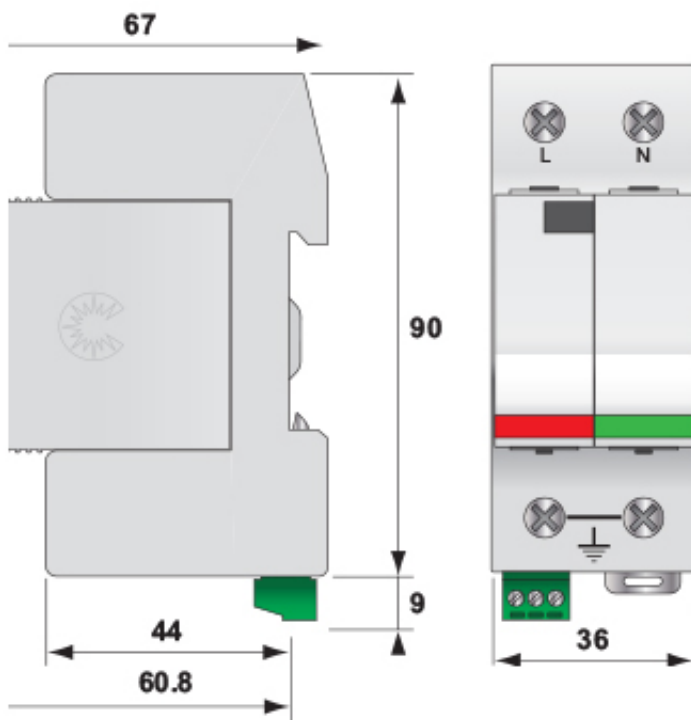

Symbol/Connection

