



COMPRESSION FITTINGS FOR COPPER PIPE

595 Nut and tail

WITH BLACK OLIVE FOR WATER SYSTEMS AND FOOD USE

COMPRESSION FITTINGS FOR COPPER PIPE

ACCORDING TO UNI EN 1254-2 STANDARD

size 1/2"

size 3/4"



595 size 1/2"

SIZE	CODE	PACKING
1/2"x10	595001210	50/300
1/2"x12	595001212	50/300
1/2"x14	595001214	50/300
1/2"x15	595001215	50/300
1/2"x16	595001216	50/300

595 size 3/4"

SIZE	CODE	PACKING
3/4"x15	595003415	25/150
3/4"x18	595003418	25/150

CERTIFICATIONS



TECHNICAL SPECIFICATIONS

The olive complies with EN 681-1 standard.

Minimum and maximum working temperatures: 0°C, 90°C.

Maximum working pressure: 10 bar.

1/2" male thread suitable for conical seats with an inner diameter of 16mm.

3/4" thread suitable for EUROKONUS standard.


COMPRESSION FITTINGS FOR COPPER PIPES.

WATER SYSTEMS AND FOOD USE.



COMPRESSION FITTINGS FOR COPPER PIPE

OVERALL DIMENSIONS

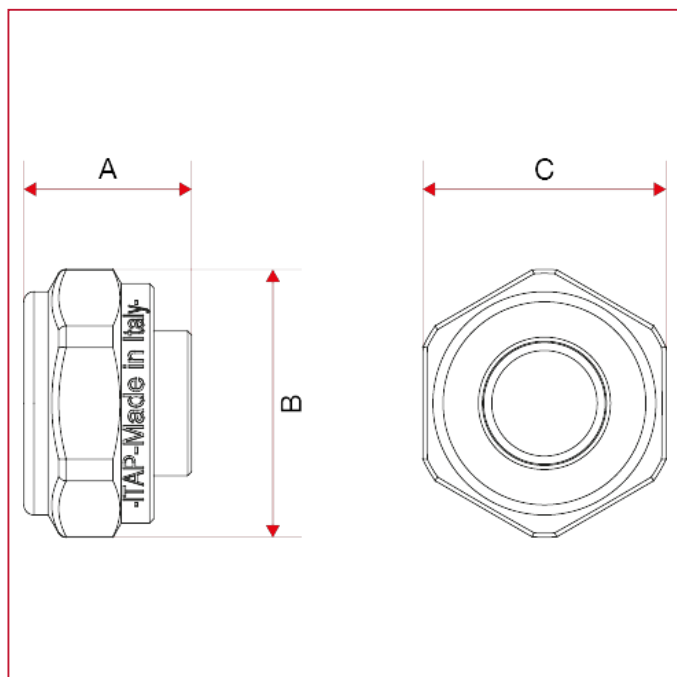

595 size 1/2"

	1/2"x10	1/2"x12	1/2"x14	1/2"x15	1/2"x16
A	17	17	17	14,5	15,25
B	26,7	26,7	26,7	26,7	26,7
C	24	24	24	24	24
Kg/cm ² bar	10	10	10	10	10
LBS - psi	145	145	145	145	145


595 size 3/4"

	3/4"x15	3/4"x18
A	18,3	18
B	30	30
C	24	24
Kg/cm ² bar	10	10
LBS - psi	145	145



COMPRESSION FITTINGS FOR COPPER PIPE

MATERIALS

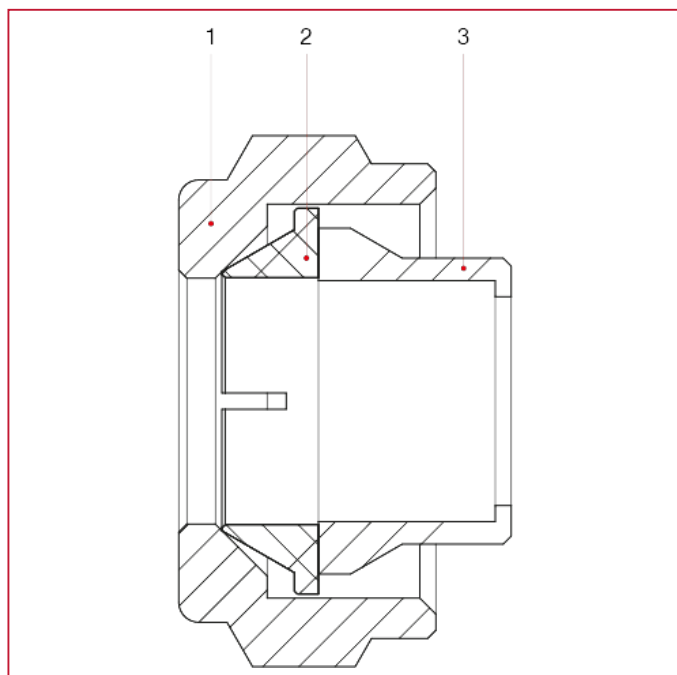


POS.	DESCRIPTION	N.	MATERIAL
1	Nut	1	Nickel-plated brass CW617N
2	Olive	1	Brass CW614N
3	Washer	1	EPDM



COMPRESSION FITTINGS FOR COPPER PIPE

INSTRUCTIONS

USE OF THE FITTINGS WITH COPPER PIPE

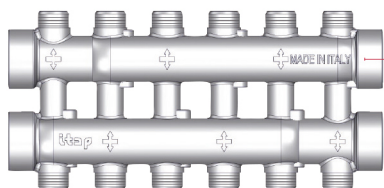


885 DUAL DISTRIBUTION MANIFOLD
1/2" male outlets, conical seat



850 BRASS BAR DISTRIBUTION MANIFOLD



518 MALE/MALE ADAPTER




465 DISTRIBUTION MANIFOLD
WITH SHUT-OFF VALVES.
1/2" male outlets with conical seat




455 DISTRIBUTION MANIFOLD
1/2" male outlets with conical seat



595 NUT AND OLIVE




COPPER



995V

595

COPPER



395

595

COPPER