

SLI029051NW_TRIPOD_PW

SLI029051NW_TRIPOD_PW

Set of two durable 2x50W floodlights on a solid telescopic tripod.

IP65


IK07



Power	100 W	Voltage	230 V
Luminous flux*	8400 lm (120°)	Colour temperature	4000 K
Colour of light	Neutral white	Beam angle	100 °
IK	07	Degree of protection (IP)	IP65

Technical data

Code	SLI029051NW_TRIP0D_PW
Power	100 W
Nominal current	405 mA
Voltage	230 V
Energy consumption	100 kWh/1000h
Frequency	50HZ Hz
Protection class	I
Power supply included	+
Power factor	0.9
Useful luminous flux*	8400 lm (120°)
Luminous flux**	8300 lm (360°)
Lamp efficacy	84 lm/W
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	100 °
RA	80
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	Aluminum, GLASS
IK	07
Degree of protection (IP)	IP65
Colour	Black
Dimension (AxBxC)	2x(205x170x30) + 2000 wire mm
For use	Outside
Assembly method	On the ceiling
Application	EXT
Made in	PRC
Other	Info to instrukcji: zaw. 2 źródła św. o EEI F, ,

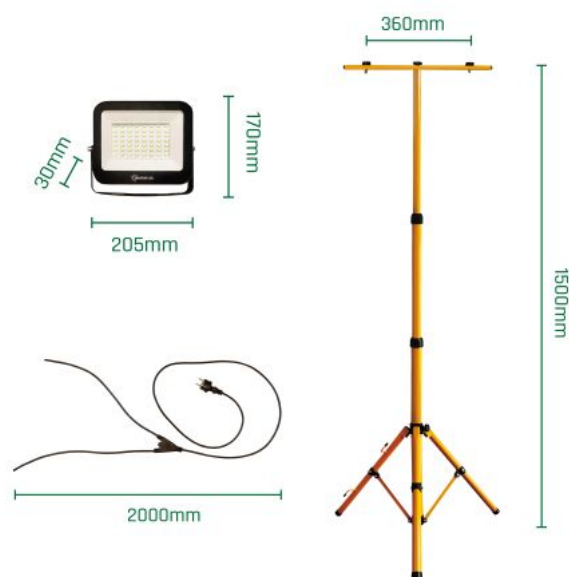

Related documents



 User manual



 Declaration of Conformity

