


CERTIFICATION
OF THE QUALITY
SYSTEM OF THE
COMPANIES



Member of



The reproduction and/or divulgation of this drawing or its included informations is strictly prohibited unless authorized by the owning company DUCATI S.p.A.
E' vietata la riproduzione e/o la divulgazione di questo disegno unitamente alle informazioni in esso contenute senza l'autorizzazione della DUCATI S.p.A.

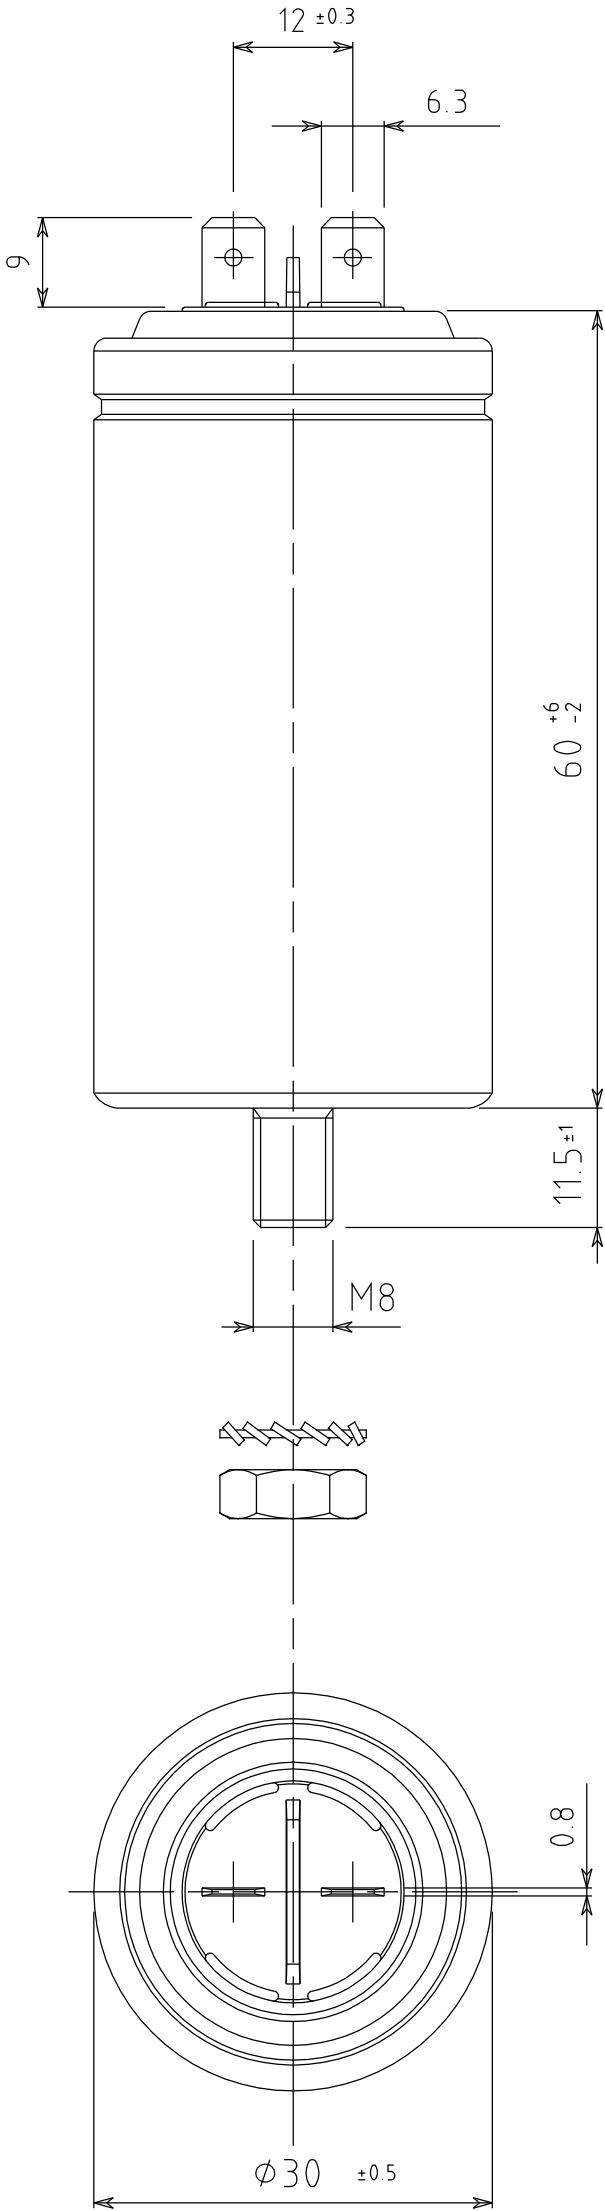

Characteristics:

Dry metallized polypropylene capacitor.
Case in aluminum.
Capacitive element enclosed in an insulated
can completely sealed with polyurethane resin.
Cap in thermoplastic elastomer material.

Provided in the box (only on request):

- Serrated externally lock washer 8.4 UNI 8842-A, DIN 6798-A
Material: Steel, white galvanized 8µm
- Hexagonal nut M8 UNI 5589, DIN 936
Material: Steel, white galvanized 8µm

DUCATI part number: 416253529

Capacitance tolerance: 4 µF ±5%

Test voltage (routine test)
Between terminals: 950Vac 2sec.
Between terminals to case: 3kVac 2sec.

Climatic category: -25/85/21

Operation classes and approvals: see marking

Protection degree: IP00

Reference standard: EN60252-1/A1
UL810

Marking:



DUCATI
energia

416.25.35..

4 µF ±5%

425V~ 10000h/cl.B

475V~ 3000h/cl.C

-25/85/21 50-60Hz S2



EN 60252-1/A1

370Vac 50-60Hz

-25/70°C 10000AFC

PROTECTED

CSA C22.2 N°190-M1985

Tamb.max 46°C



B	Dimensioning of total height value (60mm) updated							05-06-19	Ciccola	
A	Reference standard and marking updated, nut and washer indications added							16-01-19	Ciccola	
Ed.		Descrizione/Description						Data/Date	Firma/Sign.	
MODIFICHE / REVISIONS										
DUCATI energia s.p.a.		 mm	TOLL. QUOTE LIBERE (TOLERANCE RATE) UNI-ISO 2768-m	TOLL. QUOTE LIBERE ANG (ANG. TOLERANCE RATE)	SCALA/SCALE	DATA/DATE	FIRMA/DRAWN	VISTO/CHECKED		
						28/04/2014	Mollica			
			OGGETTO/PART NAME					CODICE/PART NR.		
			Dimension for metallized polypropylene film capacitor for A.C. use.					416253529		
		EDIZ /EDIT.		A	B					