

Belt sander BBS/S



NEW



Powerful special DC motor, quiet and long-lasting.


Left-justified band grinder, making it possible to process surfaces 'right to the corner'. Fine adjustment of rollers prevents lateral rolling off. Easy replacement of bands by means of a spring tension system without the use of tools. Housing is made of glass-fibre reinforced POLYAMIDE. Complete with screw clamp and with 5 x 120 grit and 240 grit grinding bands.

Supplied in a practical case as described on page 8.

Technical data:

220 – 240V. 150W. Grinding band 40 x 265mm. Grinding surface 60 x 40mm, band speed 160m/min. Length 175mm. Weight 700g. Class 2 insulation..

NO 28 526

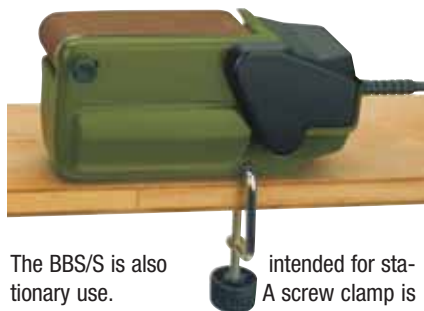

The BBS/S is also intended for stationary use. A screw clamp is included.

A screw clamp is intended for stationary use.

Grinding bands made from high-quality corundum (aluminium oxide)

Mounted on a high-performance support. For the grinding of metal, non-ferrous metals, wood and plastics.

40 x 265mm.

NO 28 922 80 grit 5 pieces

NO 28 924 120 grit 5 pieces

NO 28 926 180 grit 5 pieces

NO 28 928 240 grit 5 pieces

