



R13-112

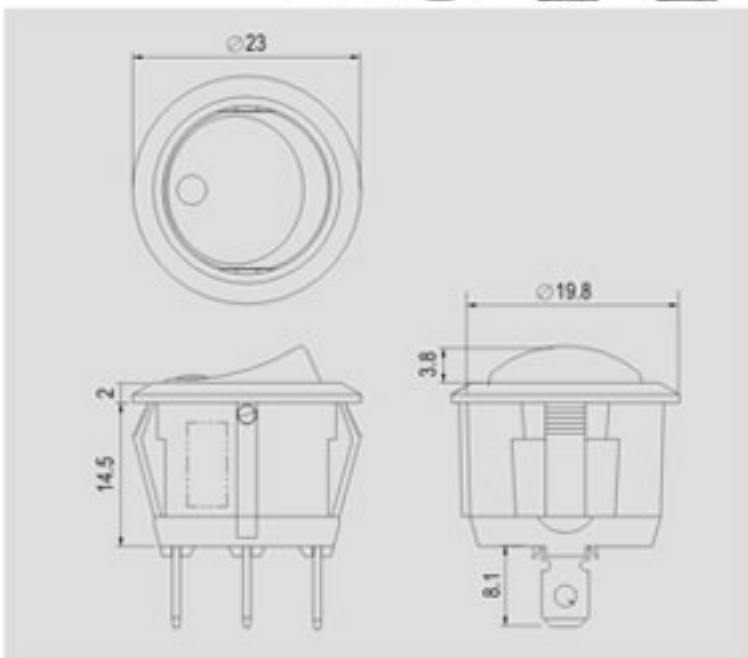


Rating
16A 125V AC 10A 250V AC
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1500V 1 minute
Cut-out

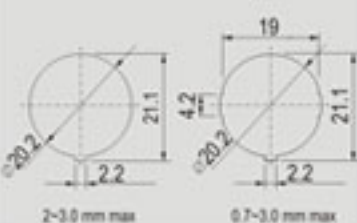

0.7~3.0 mm max

Cut-out for X8 ROCKER

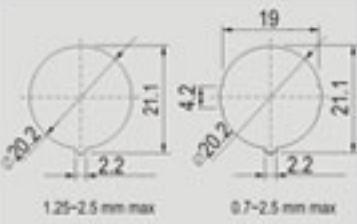

0.7~2.5 mm max

FEATURES

- * MATERIAL: Frames are nylon (UL flame: 94V-2). Terminals are silver plated brass.
- * Illuminated actuators are molded in PC, available with red, amber and green colors.
- * Snap-in mounting, easy to install switch into panel.
- * Waterproof cover is optional, except LP & BP type.
- * The dimension of frame is 14.5mm, for shorter one, please refer to page.1-51 item no. R13-208.
- * R13-112B9,R13-112B9F: LED with PCB inside for AC rating.



Ordering number instruction

R13-112 -

FUNCTION	TERMINAL
Different button (按鈕不同)	0 2 .187" SQ
A 1 2 ON OFF 2P SPST	
A 2 1 2 ON OFF 2P SPST	
A 5 1 2 ON OFF 2P SPST (Gloss Finish)	
A P 1 2 ON OFF 2P SPST	
B 1 2 3 ON OFF 3P SPST (NEON) 125VAC 33KΩ / 250VAC 150KΩ	
B 2 1 2 3 ON OFF 3P SPST (NEON) 125VAC 33KΩ / 250VAC 150KΩ	
B 9 1 2 3 ON OFF 3P SPST(W/O Lens) (LED) LED Rating @ 10MA V _f =1.85	
B 1 0 1 2 3 ON OFF 3P SPST (LED) LED Rating @ 10MA V _f =1.85	
B P 1 2 3 ON OFF 3P SPST (NEON) 125VAC 33KΩ / 250VAC 150KΩ	
B F 1 2 3 ON OFF 3P SPST (NEON) 125VAC 33KΩ / 250VAC 150KΩ	
B 2 F 1 2 3 ON OFF 3P SPST (NEON) 125VAC 33KΩ / 250VAC 150KΩ	
B 9 F 1 2 3 ON OFF 3P SPST(W/O Lens) (LED) LED Rating @ 10MA V _f =1.85V	
C 1 2 3 ON ON 3P SPDT	
C P 1 2 3 ON ON 3P SPDT	
D 1 2 3 ON OFF ON 3P SPDT	
D P 1 2 3 ON OFF ON 3P SPDT	
E 1 2 ON OFF 2P SPST	
F 1 2 ON OFF 2P SPST	
G 1 2 3 ON ON 3P SPDT	
H 1 2 3 ON OFF ON 3P SPDT	
I 1 2 3 ON OFF ON 3P SPDT	
L 1 2 ON OFF 4P SPST (LED) LED Rating @ 10MA V _f =1.85V	
L P 1 2 ON OFF 4P SPST (LED) LED Rating @ 10MA V _f =1.85V	
L F 1 2 ON OFF 4P SPST (LED) LED Rating @ 10MA V _f =1.85V	
A 8 1 2 ON OFF 2P SPST	
B 8 1 2 3 ON OFF 3P SPST (NEON) 125VAC 33KΩ / 250VAC 150KΩ	
B 8 F 1 2 3 ON OFF 3P SPST (NEON) 125VAC 33KΩ / 250VAC 150KΩ	
C 8 1 2 3 ON ON 3P SPDT	
D 8 1 2 3 ON OFF ON 3P SPDT	
F 8 1 2 ON OFF 2P SPST	