TECHNICAL DATA SHEET – KARWELL

The large KARWELL mat is made of resilient rubber with an opened or closed bottom. Its appearance resembles a honeycomb.

Colour brushes for the mat can be purchased additionally to form a simple logo or mosaic. Suitable for passenger cars!

KARWELL mat with a non-flammable rubber may be used for emergency exits.
Reaction to fire: Bfl-s1

opened bottom

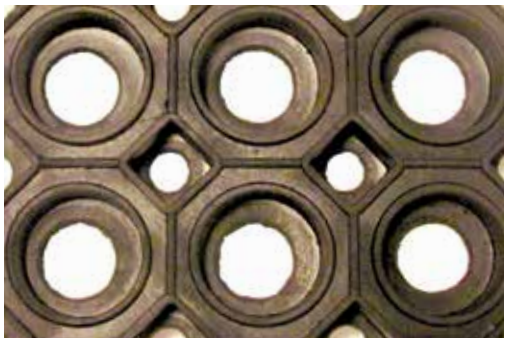

closed bottom

connector

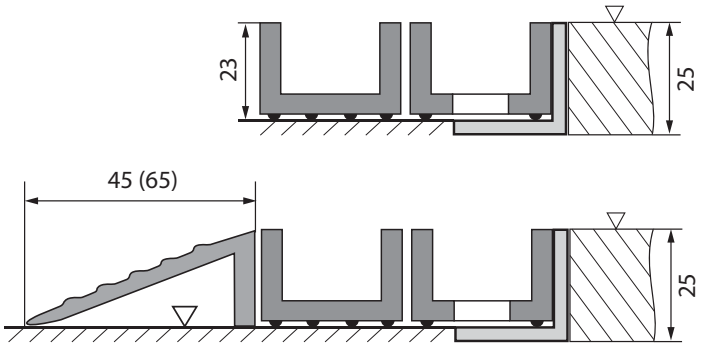

Technical parameters

Dimensions and variants:	according to the client's requirements, basic module 150x100 cm (larger dimensions are achieved by bonding)
Height:	23 mm
Weight:	15 kg/m ^{2}
Material:	natural rubber
Installation:	at floor level in prepared openings fitted with aluminium frame 25x25x3 mm, or freely placed on the floor in an aluminium tapered frame, width 45 mm (up to 120 cm), 65 mm. Or with a 45 mm rubber, as necessary. The mat can be anchored to the base using the anchoring set consisting of 2 rollers, 2 dowels, 2 screws
Resistance:	suitable for any loading (without colour brushes)
Use:	entrances to car showrooms, shopping centres, administration buildings and ski areas (ski lift entrances) etc.