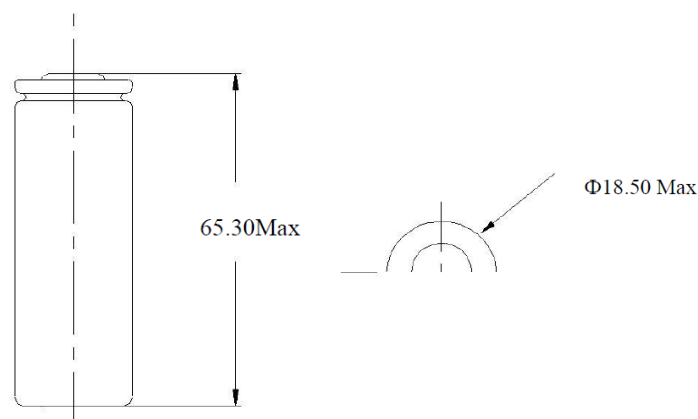


GENERAL SPECIFICATIONS / SPECIFICATION GÉNÉRALES

Classification / Classification	Lithium Cobalt Oxide Cylindrical Cell (ICR)
Designation IEC / Désignation IEC	18650
Nominal Capacity / Capacité Nominale	2600 mAh
Minimal Capacity / Capacité Minimale	2500 mAh
Nominal voltage / Tension Nominale	3.7V
Voltage at End of Discharge / Tension fin de décharge	2.75V
Max Voltage / Tension Maximale	4.2V
Initial Impedance / Impédance initiale	≤32mΩ
Standard charge / Charge standard	Constant Current 0.2C to 4.2V
Maximum Continuous Charge Current Courant de charge continu maximum	0.5C
Standard Discharge / Décharge Standard	Constant Current 0.2C to end Voltage 2.75V
Maximum Continuous Discharge Current Courant de Décharge continu maximum	3.0C
Operating temperature range Température d'utilisation	Charge 0°C to 45°C Discharge -10°C to 60°C
Storage temperature range Température de stockage	Less than 1 Year: -10°C to 25°C Less than 3 Months: -20°C to 35°C
Average weight (g) / Poids moyen (g)	50g
Dimensions / Dimension	65.3 x 18.5 ±0.5mm

NOMINAL DIMENSION (mm)


*The above information is generally descriptive only and is not intended as guarantee or warranty
 **Uniross reserves the right to alter or amend the design, model and specification without prior notice.