

MP 174565 xtd CliP System

Rechargeable Li-ion battery

3.65 V high energy Li-ion battery with an integrated enclosure

Saft's MP 174565 xtd CliP System 1s1p battery retains all of the extreme environmental operating conditions of the cell, plus it has its own mechanically integrated enclosure system. Built strong for tough environments.

Benefits

- Excellent operating life in calendar, cycling ($\geq 2,700$ 100% DoD cycles) and float charging conditions
- Unrivalled operating temperature range from -40°C to $+85^{\circ}\text{C}$
- High level of safety, compatible with potentially explosive atmospheres
- Long shelf life with extremely low capacity loss under storage
- Easy integration
- Smaller environmental footprint than other technologies

Key features

- High energy density (264 Wh/l, and 150 Wh/kg)
- Aluminium casing
- Hermetically sealed
- Operates in any orientation
- Maintenance free
- No memory effect
- Manufactured in EU

Designed to meet all major quality, safety and environmental standards

- Safety: UL 1642 and IEC62133 Ed. 2
- Transport: UN 3480, UN 3481
- Quality: ISO 9001, ISO 13485
Saft World Class program
- Environment: ISO 14001, RoHS and REACH compliant

Typical applications

- Backup for industrial equipment
- Medical devices
- Tracking
- Oil & Gas applications
- Internet of Things
- Wireless Sensor Networks
- Lighting & signalling



Electrical characteristics

Typical capacity (at C/5 rate, $+25^{\circ}\text{C}$, 2.5V cut-off) ⁽¹⁾	4.0 Ah
Nominal voltage	3.65 V
Nominal energy	14.6 Wh
Recommended maximum discharge current ⁽²⁾	Continuous 5 A

Physical characteristics (sleeved cell)

Thickness ⁽³⁾	20.0 mm
Width	51.0 mm
Height (not including cable and connector)	75.0 mm
Volume (not including cable and connector)	0.076 l
Typical weight	116 g
IEC battery designation	11NP20/51/75
Saft part number	07943D

Operating conditions

Typical cut-off voltage	2.5 V
Charging method	Constant current/Constant voltage
Charging voltage	4.2 V
Maximum continuous charge current ⁽⁴⁾	4 A (~1C rate)
Operating temperatures	Charge -30°C to $+85^{\circ}\text{C}$ Discharge -40°C to $+85^{\circ}\text{C}$
Storage & transportation temperatures	Recommended $+15^{\circ}\text{C}$ to $+30^{\circ}\text{C}$ Allowable -40°C to $+85^{\circ}\text{C}$

⁽¹⁾ Can vary depending on temperature and discharge rate.

⁽²⁾ Limited by the electronic protection circuit. Consult Saft for other possibilities.

⁽³⁾ At beginning of life, 100% State-of-Charge. Can increase with temperature and the cells' calendar life.

⁽⁴⁾ For optimised charging below 0°C and above 60°C , consult Saft.



CliP System cell enclosure

Battery assembly

The CliP System is designed to reduce the cost of assembly by removing the requirement to provide an overall heat shrink cover to mechanically protect a 1s1p battery. The CliP provides mechanical protection for all six sides, corners and the electronic protection circuit.

Battery-level features



- Saft provides complete battery system designs
- Incorporating several levels of redundant safety features to prevent abuse conditions such as over-charge, over-discharge and short circuits

Storage

- The storage area should be clean, cool (preferably not exceeding +30°C), dry and ventilated

Warning

- Do not crush, short-circuit, incinerate, dismantle, immerse in any liquid, heat above +85°C
- Observe charging conditions

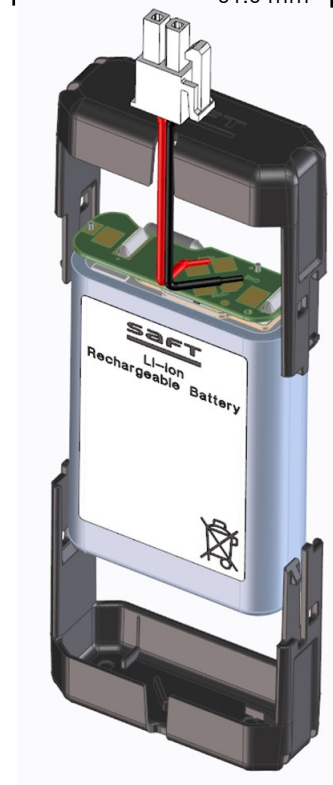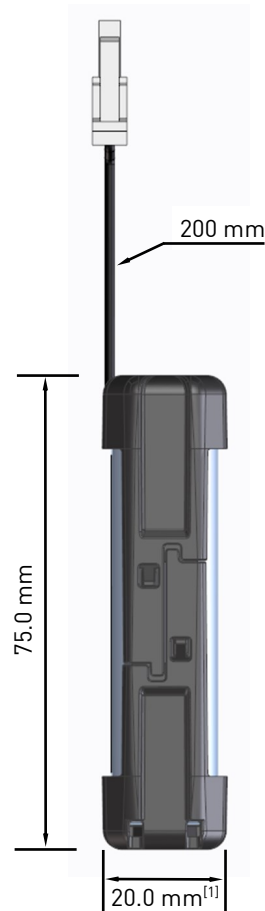

Description	Conditions	Thickness ^[1]
At beginning of life	25°C at 30% state of charge 3.7 V	18.65 mm
At beginning of life	25°C at 100% state of charge 4.2 V	18.80 mm
At 700 cycles	25°C charged C - C 4.2 V—2.7 V	19.25 mm
On continuous float charge	60°C at 4.2V after 1 year	20.75 mm
At 100 cycles	85°C charged C/5 - C/5 4.1 V-2.7 V	21.45 mm
Height	Maximum height	75.00 mm
Width	Maximum width	51.00 mm
Thickness ^[1]	Maximum housing thickness	20.00 mm
Connector (Male)	Molex Mini-Fit Jr. ref. 39-01-2020	
Connector (Female)	Molex Mini-Fit Jr. ref. 39-00-0038	



Saft

12, rue Sadi Carnot
93170 Bagnolet France
Tel.: +33 (0)1 49 93 19 18
Fax: +33 (0)1 49 93 19 69
www.saftbatteries.com

Saft America, Inc.

313 Crescent Street
Valdese, NC 28690—USA
Tel.: +1 (828) 874 41 11
Fax: +1 (828) 879 39 81
www.saftbatteries.com

Doc N°: 31158-2-0418
Edition: April 2018
Information in this document is subject to change without notice and becomes contractual only after written confirmation by Saft.
Published by the Communication Department
Photo credit: Saft
Produced by CE Marketing Department