


CONIFLOOR IPS AS-ESD

(Industrial Polyurethane System Anti-Static-ESD)

Tough-hard, low-emission, electrostatically conductive floor coating based on polyurethane resin, static crack bridging, mechanically resilient for ESD protection areas (EPA) according to requirements EN 61340-5-1 indoor

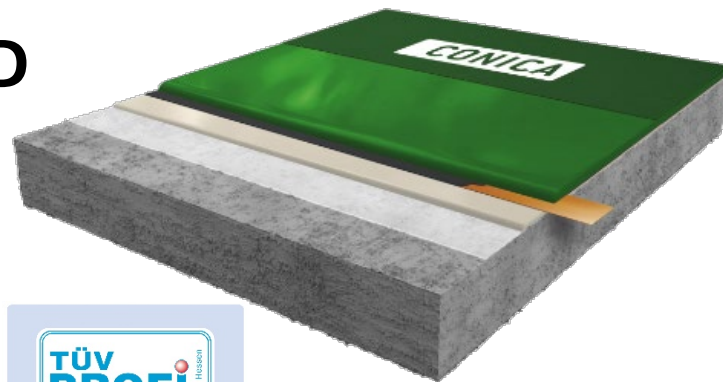

- 1 Primer
- 2.1 Scratch coat optional
- 2.2 Levelling layer recommend
- 3 Conductive layer with copper tape
- 4 Conductive coating tough hard
- 5 ESD top coat pigmented

System design and consumption

| | LAYER | PRODUCT | CONSUMPTION (kg/m²) | QS / FILLER (kg/m²) | APPLICATION |
|-----|--|---|---|--|---|
| 1 | Primer on strongly absorbent u. porous substrates, if necessary, 2-layer application * | CONIFLOOR EP 116 LE / CONIFLOOR EP 112 CONIFLOOR EP 110 | 0.3 – 0.5 * 2-layers if necessary or scratch coat | QS 03/08 0.8 – 1.0 | Squeegee / roller / brush Sand broadcasting, not in excess |
| 2.1 | Scratch coat / levelling (optional) | CONIFLOOR EP 116 LE / CONIFLOOR EP 112 CONIFLOOR EP 110 filled with QS 01/03 | 0.6 – 1.0 QS 01/03 MR ≤ 1:1 | QS 03/08 2.0 – 3.0 | Trowel / smoothing rake / notched trowel or squeegee Sand broadcasting, not in excess |
| 2.2 | Pore sealer / levelling layer (recommend) | CONIFLOOR 420 | 0.8 – 1.0 | none | Trowel / smoothing rake / notched trowel or rake |
| 3 | Conductive layer with copper tape to earth point | CONIFLOOR EP 150 incl. copper tape for earthing | 0.1 – 0.12 | none | Earthing copper tape on scratch coat (grinded) below the conductive layer, measure conductive layer before apply next coating! |
| 4 | Tough-hard coating self-levelling, conductive | CONIFLOOR 420 AS (do not fill!) | 2.2 – 2.5 | none | Notched rubber squeegee / notched rubber rake on conductive layer, spike roller with conductive coatings mandatory! |
| 5 | ESD-topcoat, pigmented, matt (mandatory for ESD!) | CONIFLOOR 520 CW ESD | 0.14 – 0.18 | optional CONIFLOOR Ballotini (Ø see test reports for slip resistance) | Roller (11 mm pile height) |
| | System layer thickness | ca. 2.0 – 3.0 mm | | | |
| | Subsoil | Surfaces must be clean, stable, and free of cracks and voids. In general, substrates must be provided in accordance with the applicable regulations. (See also "General processing guidelines for CONICA coatings, CONICA seals and CONICA parking deck coating systems"). Adhesive tensile strength ≥ 1.5 N / mm², max. Residual moisture ≤ 4% -CM, on cementitious substrates. Special precautions must be taken in the event of higher residual moisture levels and moisture by rising water. Preparation of the surface e.g. by grinding (diamond) or shot blasting (Blastrac) with subsequent sweeping and vacuuming is mandatory. The above-mentioned consumption values have been determined in the laboratory under practical conditions to achieve the technical properties. In the case of existing on-site conditions and conditions such as temperature, surface roughness etc., the consumption values may deviate from the stated values. In case of doubt, we recommend creating sample areas on site. | | | |
| | Note | For other substrates, which are not mentioned here or special requirements, special primers must be used if necessary, please ask our technical service. Detailed processing instructions can be found in the respective product data sheets or are available on request. Products printed in bold represent the tested system structure. | | | |

High Performance Flooring


Sport | Decorative | Industrial | Playground

Areas of application

- Production areas with EPA-requirements (ESD)
- Pharmaceutical production areas
- Warehouses and high bay warehouses
- Hospitals, medical practices, laboratories, pharmaceutical production
- Technical areas, IT rooms

System properties

- **Very high** UV and colour resistance with pigmented aliphatic top coat
- **Conductive** accord. EN 1081 and **EN 61340-5-1** (4-1 u. 4-5) for **ESD areas**
- Slip resistant surfaces R9 – R11
- **Trafficable** with forklift and pallet trucks and similar
- **Hygienic**, joint and seamless surfaces easy to clean
- **Very low emissions tested** according to TÜV Proficert, AgBB, M1, A + and others
- Statically **crack bridging**
- Flame retardant class **Bfl-s1**

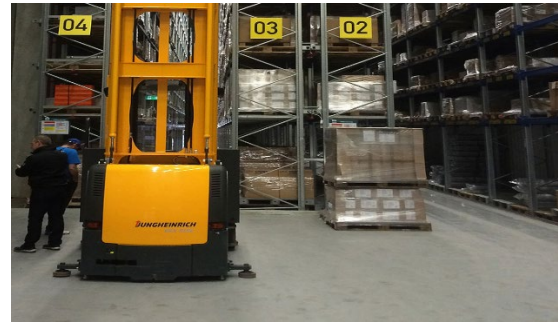

Technical data (internal / external approvals)

| PROPERTIES | STANDARD | VALUES |
|---|---|---|
| Statically crack bridging | EN 1062-7 | Class A3 > 0.5 mm (achieved < 0.9 mm at 23°C) |
| Elongation at break (Coating) | DIN 53504 | ca. 30 % |
| Shore-Hardness | DIN ISO 868 | 69 D after 28 d |
| Flexural strength | EN 196 / ASTM C109 | ca. 28 N/mm ² |
| Compressive strength | EN 196 / ASTM C109 | ca. 51 N/mm ² |
| Chemical resistance | EN ISO 2812-1 | DiBT Test liquids 2, 3, 10, 11 others on request. |
| Impact strength | DIN EN 13813 | ≥ 4 Nm (IR4) |
| Abrasion resistance (Taber) | ISO 9352, ASTM D 1044 | ≤ 25 mg (incl. topcoat) |
| Abrasion resistance (BCA) | DIN EN 13813 | AR ≤ 0,5 |
| Slip resistance | DGUV guide line 108-003 / DIN 51130 | Class R9 / R10 with SIC |
| Adhesive strength | DIN ISO 4624 | ≥ 1,5 N/mm ² (Depends on substrate) |
| Fire classification | EN 13501-1 | Bfl-s1 |
| Conductivity with pigmented ESD top coat | EN 1081 EN 61340-4-1 EN 61340-4-5 EN 61340-4-5 | Rg ≤ 10 ⁶ Ω Rg ≤ 10 ⁹ Ω Rs ≤ 3.5 x 10 ⁷ Ω (new ≤ 10 ⁹ Ω) Body Voltage min. < 100 V |
| Low emission tested | AgBB / M1 / TÜV Proficert Interior Premium / MVV TB Annex 8 / ABG / BREEAM Exemplary Level / LEED v4 / CAM Italy / A+ and others | Very low emission |

CONICA AG
Industriestrasse 26
8207 Schaffhausen/ Swiss
Tel. +41 (0)52 644 36 00
Fax +41 (0)52 644 36 99
info@conica.com
www.conica.com

The content of this information sheet is non-binding. With regard to the variety of surfaces and object conditions on the one hand, and on the other hand due to the fact that the application and processing of this product are beyond our control, the buyer and / or user is not released from the obligation to its own responsibility, to check and ensure, that this product is suitable for the intended use. Our verbal, written advice and tests is non-binding.

With the publication of this issue, all previous information on this system is no longer up to date. Since the data sheets are updated regularly, it is the responsibility of the user to have the current version available. Registered users can download current data sheets from our homepage at any time. We would be happy to send them to you on request.

High Performance Flooring

Sport | **Decorative** | **Industrial** | Playground