

PMD 5050S



FEATURES

- OHV engine provides consistent power for multiple applications
- Fuel: Diesel
- Starting Systems: Electric (with battery)
- Low-oil level shutdown automatically safeguards engine from damage
- Digital multi meter tracks engine runtime for maintenance intervals
- Fuel gauge allows user to track diesel levels
- AVR Automatic Voltage Regulator
- Equipped with 4 wheels for move and transport easily
- Central lifting point



Caracteristici principale

Frecvență	Hz	50
Tensiune	V	400
Faze		3
Putere pasivă	watt	4000
Putere continuă	watt	3600

Putere Monofazica

Tensiune	V	230
Putere pasivă monofazică	watt	1330
Putere continuă monofazică	watt	1200




Motor		
Marca		Pramac
Tip		OHV
Viteză nominală de funcționare	rpm	3000
Combustibil		Diesel
Sistem de pornire		ELECTRICĂ
Capacitate ulei	l	1.65
Protecție ulei		✓



Alternator		
Sistem de regulare tensiune		AVR

Date dimensionale		
Lungime	(L) mm	910
Lățime	(W) mm	518
Înălțime	(H) mm	682
Greutate fără combustibil	kg	185
Dimensiuni cutie carton lungime/lățime/înălțime	mm	950x570x765

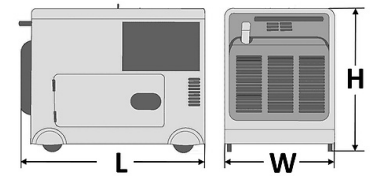

Autonomia		
Capacitate rezervor combustibil		14.5
Consum combustibil la 50%	l/h	1.28
Timp de funcționare la 50%	h	11.3



Nivel zgomot		
Nivelul de zgomot garantat (LWA)	dBA	97
Nivel de stridență a zgomotului la 7 mt	dBA	69

CONTROL PANEL

Mounted on the genset and complete of: instrumentation, control, protection of the generating set and sockets.

COMMANDS:

- Start selector switch with key: OFF - ON - START

INSTRUMENTATION

- Voltmeter
- Hours-counter
- Frequency meter
- Fuel gauge

PROTECTIONS:

- Thermal Magnetic breaker
- Oil Guard (with lamp)
- Fuse 9A (12V DC)

OUTPUT:

- Battery Charger 12V DC

PRIZE

SCHUKO 230V 16A IP44	1
3P+N+T CEE 400V 16A IP44	1

Informațiile sunt aliniate cu fișierul de date în momentul descărcării.
Imprimat pe 04/04/2025 (ID 10764)