


EFB TYPE

START & STOP

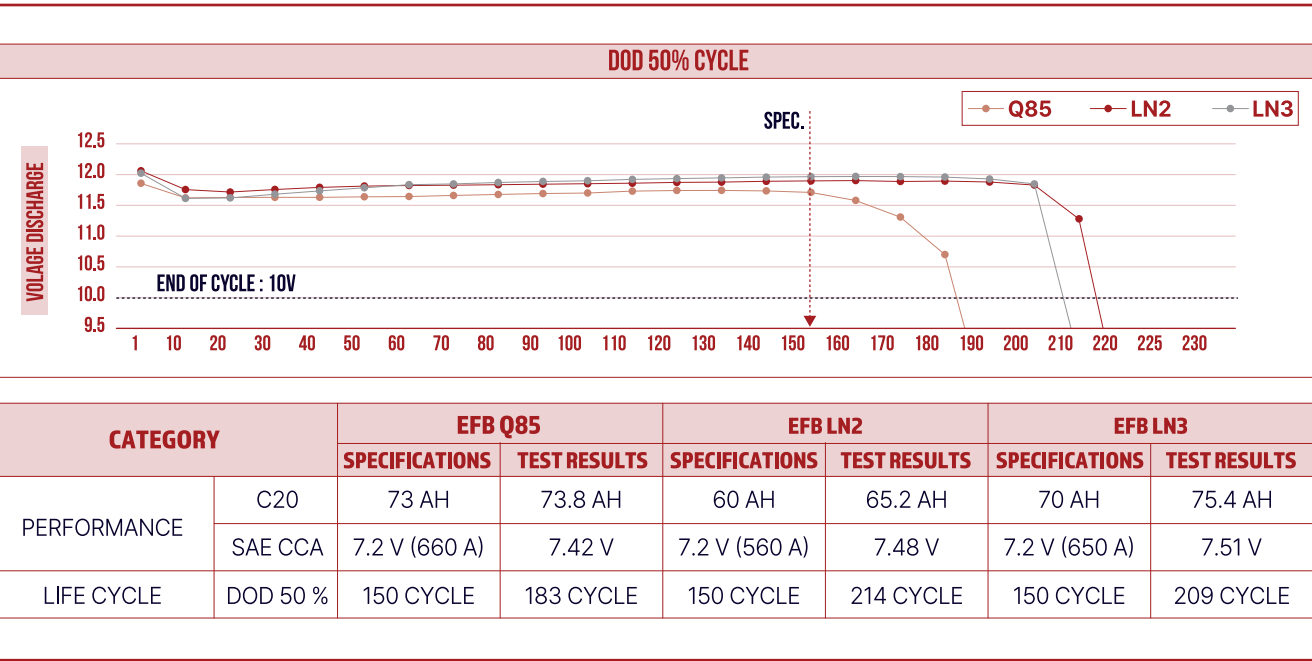

ENHANCED FLOODED BATTERY

TYPE	SIZE	DIMENSIONS(MM)						TERMINAL	LAYOUT	PERFORMANCE		
		LENGTH		WIDTH		HEIGHT				20HR	RC	CCA
		IN	MM	IN	MM	IN	MM					
JIS	K42	7	187	5	127	8	223	STD/SMALL	0/1	35	60	370
	M42	7	197	5	127	8	223	STD/SMALL	0/1	35	60	370
	N55	9	238	5	129	8	223	STD/SMALL	0/1	55	80	460
	Q85	9	232	6	173	8	225	STD	0/1	65/73	110/125	550/660
	S95	10	260	6	174	8	225	STD	0/1	70/80	130/150	680/760
DIN	T110	12	304	6	172	8	225	STD	0/1	95/95	150/170	760/820
	LN1	8	208	6	175	7	190	STD	0	50	80	480/540
	LN2	9	242	6	175	7	190	STD	0	60/65	100/110	560/640
	LN3	11	277	6	175	7	190	STD	0	70/75	120/130	650/760
	LN4	12	315	6	175	7	190	STD	0	80/85	150/160	730/800
	LN5	14	353	6	175	7	190	STD	0	95/100	175/185	850/900
	LN6	15	392	6	175	7	190	STD	0	105	195	950
	LBN3	11	277	6	175	6	175	STD	0	65	110	650
BCI	LBN4	12	315	6	175	6	175	STD	0	75	135	730
	65	11	292	7	189	7	191	STD	0/1	75	130	750
	78	10	260	7	179	8	205	SIDE	0/1	70	120	750
	M24	10	260	6	174	8	225	TM	0/1	80	150	760
	M27	12	304	6	172	8	225	TM	0/1	95	170	820
	M31	13	330	6	173	9	240	TM	0/1	100	180	850

*Specifications are subject to change without notice.

SPECIAL DOUBLE LID

- Anti-leakage structure
- Proof against 50° tilt

GRID TECHNOLOGY

Creating sub grain boundary which provide longer life span against corrosion.

- Good for endurance life span
- High corrosion resistant
- High conductivity

EXPANDED GRID

PUNCHED GRID

HIGH PURE ELECTROLYTE

- Low water loss

ELECTROLYTE DDITIVES

- Increase deep discharge cycle performance

MIXING ELEMENT

- Prevent stratification (Option for European/DIN Types)

SPECIAL ADDITIVES

- Improved charging acceptance

SPECIAL ORGANIC FIBER

- High Life Cycle