

D-ZK Vinclu de îmbinare cu laturi egale

Vinclu de îmbinare pentru fixarea elementelor de construcție din lemn



Aprobări și Rapoarte

- ETA-12/0523



Informații despre produs

Caracteristici

- Utilizat ca element de legătură în cadrul construcțiilor din lemn
- Grosimea plăcii metalice: 2,5 mm, 3,0 mm
- Fabricată din oțel cu strat de zinc galvanizat pentru o rezistență sporită la coroziune
- Grosimea protecției anticorozive de minimum 8μm

Aplicații

- Construcții din lemn
- Garduri din lemn
- Suporturi pentru glafuri
- Armarea rafturilor din lemn
- Corniere de întărire
- Chioșcuri, case de lemn, foișoare, hale
- Armături de diferite tipuri

Material de bază

Informații tehnice

- Chereștea


De asemenea, potrivit pentru utilizare în:

- Placaj
- Placă aglomerată



Ghid de instalare

1. Alegeți dimensiunea potrivită a elementului de îmbinare.
2. Setezi elementul de îmbinare în locul și poziția solicitate.
3. Fixați elementul de îmbinare folosind cuie de ancorare sau șuruburi adecvate.


Technical drawing of a rectangular plate. The overall width is 37.5 (7.5 + 30). The overall height is H. There are four small holes, each with a diameter of $\varnothing 4.6$, arranged in a 2x2 grid. The center-to-center distance between the holes is 30. The distance from the top edge to the center of the top holes is 5. The distance from the bottom edge to the center of the bottom holes is 30. A dimension line indicates the total height H.






D-ZK-533





D-ZK-70

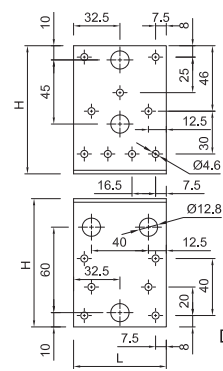


D-ZK-90



D-ZK-60



D-ZK-994

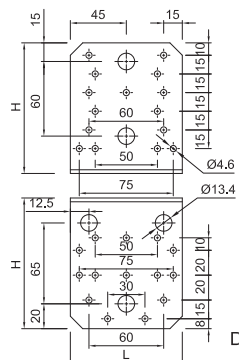

D-ZK-105

Cod produs	Dimensiuni conector			Număr găuri			
	Grosime	Dimensiuni		Ø4.6	Ø10.4	Ø12.8	Ø13.4
		H	L				
	t	[mm]					
D-ZK-553	2.5	50	35	4 + 4	1 + 1	-	-
D-ZK-70	2.5	70	55	10 + 10	1 + 1	-	-
D-ZK-90	2.5	90	65	8 + 6	-	2 + 3	-
D-ZK-60	3	60	45	6 + 6	1 + 1	-	-
D-ZK-994	3	90	40	8 + 8	2 + 2	-	-
D-ZK-105	3	105	90	15 + 14	-	-	2 + 3

The diagram shows a mechanical assembly. A central vertical bar is supported by two triangular bases. Two rectangular blocks are attached to the sides of the bar. A downward force F is applied to the top of the central bar. The blocks have internal features that suggest they might be part of a larger mechanism, possibly a valve or a pump.

Diagramă de încărcare

Product Code	Rezistență la încărcare		
	Caracteristici	Design	Recomandat
	[kN]	[kN]	[kN]
D-ZK-553	9.68	3.10	2.20
D-ZK-70	13.20	4.30	3.00
D-ZK-90	13.20	4.30	3.00
D-ZK-60	9.68	3.10	2.20
D-ZK-994	13.20	4.30	3.00
D-ZK-105	13.20	4.30	3.00

Date tehnice

Cod produs	Dimensiuni conector		Cantitate [buc]			Greutate [kg]			Coduri de bare
	Dimensiuni [mm]		Cutie	Exterior	Palet	Cutie	Exterior	Palet	
D-ZK-553 ¹⁾	50	35	100	100	10800	6.1	6.1	685.6	5906675480022
D-ZK-70 ¹⁾	70	55	50	50	5400	6.8	6.8	761.7	5906675480329
D-ZK-90 ¹⁾	90	65	30	30	3240	6.3	6.3	705.5	5906675480527
D-ZK-60 ¹⁾	60	45	70	70	7560	8.3	8.3	922.8	5906675480923
D-ZK-994 ¹⁾	90	40	50	50	6000	6.4	6.4	796.8	5906675480121
D-ZK-105 ¹⁾	105	90	20	20	2160	6.4	6.4	721.8	5906675480725

1) ETA-12/0523