

Серията аварийни тела RACER LED съдържа две тела с мощност 3W и 5W, снабдени с тест бутон и индикатор за зареждане. Телата са с плъзгач за изключване или превключване между 2 режима на работа: 160lm (high) или 80lm (low) с продължителност на светене съответно 3,5h и 7h. В комплект с телата RACER LED се предлагат 2 лепенки с пиктограми за указване на посоката на евакуация и на изход.


The emergency LED lighting fixture series RACER LED include two fixtures that have a charging indicator and a test button. They also have a slide button for switch OFF or switching between 2 operation modes: working time 3.5h (high) or 7h (low). The set includes also 2 stickers with pictograms for indicating the escape route or the exit.



RACER LED M 3W



RACER LED L 5W

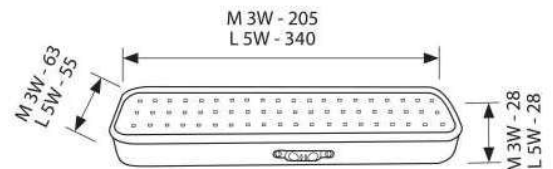

- 230V
- 50/60Hz
- IP 20
- Home icon
- Installation icon
- 2 x 0,75-2,5
- RoHS icon
- Hg icon
- CE icon

АРИКУЛ	МОЩНОСТ	БАТЕРИЯ	ВРЕМЕ/РАЗРЯД	ВРЕМЕ/ЗАРЕЖДАНЕ	КОД ЗАЯВКА
Art	Watt	Battery	Emergency time	Rechargeable time	Order code
RACER LED M 3W	3	Li-Ion 3.7V 1000mAh	3.5-7h	24h	VIV004032
RACER LED L 5W	5	Li-Ion 3.7V 2000mAh	3.5-7h	24h	VIV004033

