


FISA TEHNICA

Reductie electrofuziune

Categorie: Fitinguri electrofuziune Mufe si capace electrofuziune

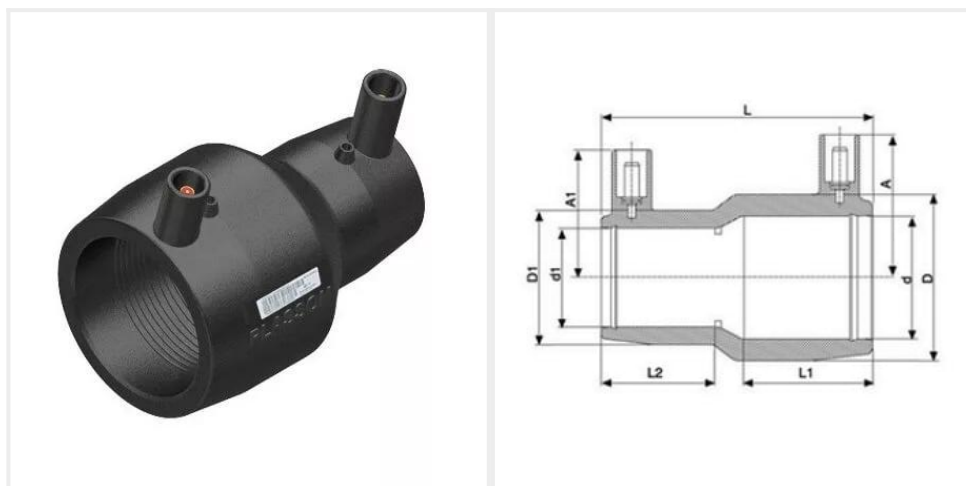

Cod: 491104

- Material : PE100 virgin , PE100RC virgin , culoare neagra
- Compatibilitate material : PE100 , PE100RC , PE80 , PEX
- Presiuni de lucru : PN10 Gaz , PN16 Apa (PE100 SDR11)
- Durata viata : minim 50 ani
- Respecta prevederile EN1555 si EN12201 respectiv ISO4437 si ISO4427
- Fabricate prin injectie in matrite
- Conectori sudare 4 mm
- Martori sudura incorporati

d mm	d1 mm	A mm	A1 mm	D mm	D1 mm	L mm	L1 mm	Presiune de lucru Gaz	Presiune de lucru Apa	Tevi	Greutate g	Buc/punga	Buc/cutie
20	16	39	39	36	36	71	35	PE100 SDR 11	PN 16	SDR 7 to SDR 11	50	1	480
25	16	39	39	36	36	71	35	PE100 SDR 11	PN 16	SDR 7 to SDR 11	50	1	480
25	20	39	39	36	36	71	35	PE100 SDR 11	PN 16	SDR 7 to SDR 11	50	1	480
32	16	42	34	44	32	81	39	PE100 SDR 11	PN 16	SDR 7 to SDR 11	60	1	360
32	20	43	37	45	32	81	40	PE100 SDR 11	PN 16	SDR 7 to SDR 11	60	1	360
32	25	43	39	45	36	81	40	PE100 SDR 11	PN 16	SDR 7 to SDR 11	60	1	360
40	20	44	38	56	36	90	44	PE100 SDR 11	PN 16	SDR 7 to SDR 11	90	1	200
40	25	47	38	56	37	90	44	PE100 SDR 11	PN 16	SDR 7 to SDR 11	90	1	200
40	32	47	43	56	44	90	44	PE100 SDR 11	PN 16	SDR 7 to SDR 11	90	1	160

FISA TEHNICA

50	25	52	41	68	37	100	49	PE100 SDR 11	PN 16	SDR 7 to SDR 11	120	1	160
50	32	52	45	68	45	100	49	PE100 SDR 11	PN 16	SDR 7 to SDR 17	120	1	128
50	40	52	48	68	56	100	49	PE100 SDR 11	PN 16	SDR 7 to SDR 17	140	1	128
63	32	59	45	82	45	119	57	PE100 SDR 11	PN 16	SDR 7 to SDR 17	180	1	96
63	40	59	49	82	56	119	57	PE100 SDR 11	PN 16	SDR 7 to SDR 17	180	1	96
63	50	59	54	82	68	119	57	PE100 SDR 11	PN 16	SDR 7 to SDR 17	220	1	80
75	63	66	59	98	82	126	66	PE100 SDR 11	PN 16	SDR 7 to SDR 17	310	1	65
90	50	78	53	116	69	143	71	PE100 SDR 11	PN 16	SDR 7 to SDR 13.6	430	1	54
90	63	78	61	116	82	143	71	PE100 SDR 11	PN 16	SDR 7 to SDR 13.6	460	1	44
90	75	78	67	116	98	143	71	PE100 SDR 11	PN 16	SDR 7 to SDR 17	480	1	41
110	63	84	61	139	82	161	78	PE100 SDR 11	PN 16	SDR 7 to SDR 17	640	1	32
110	75	83	66	140	98	159	80	PE100 SDR 11	PN 16	SDR 7 to SDR 17	680	1	-
110	90	84	74	139	116	161	78	PE100 SDR 11	PN 16	SDR 7 to SDR 17	740	1	23
125	90	88	70	158	116	171	85	PE100 SDR 11	PN 16	SDR 7 to SDR 17	1020	1	18
125	110	88	80	158	141	171	85	PE100 SDR 11	PN 16	SDR 7 to SDR 17	1030	1	18
160	90	105	69	199	116	193	94	PE100 SDR 11	PN 16	SDR 7 to SDR 17	1440	1	12
160	110	105	80	199	141	193	94	PE100 SDR 11	PN 16	SDR 7 to SDR 17	1520	1	12
160	125	105	89	199	158	195	94	PE100 SDR 11	PN 16	SDR 7 to SDR 17	1570	1	6
180	125	116	87	222	158	212	103	PE100 SDR 11	PN 16	SDR 7 to SDR 17	2060	1	6